N2702L

1981 Cessna 414A Ram IV

FAA Certificates & Form 337

Aircraft S/N: 414A-0608



Prepared by the worldwide aviation specialists at RidgeAire, Inc.

CAMERA HO. 2 NDATE: 9-1-83

| | RD AIRWOR | | TIFI()TE | |
|--|--|--|--|---|
| | NUFACTURE: ME MODEL | AV | ER | ATEGORY |
| | essus LRAL | 414A 7414 | 70608 N | ormal |
| 5. AUTHORITY AND BASIS FOR. This airworthiness certifice date of issuance, the airc therefor, to be in. conditi- comprehensive and detailst Aviation, except as noted Exceptions: None | the is essued pursuant to the profit to which issued had been profit and the profit of | Togeset Aviation October 11 to the State of Amer 8 to the | 958 and certifies to conform to the the requirements of Canvention on In | that, as of the type certificate of the applicable ternational Civil |
| 6. TERMS AND CONDITIONS Unless sooner surrendered, this airworthiness certificat performed in accordance vaircraft is registered in t | supplied of the state of the st | technice Busineer minorion date is officered typinologistics, proportion the federal Avidence beacher, Cib. | e established by the maintenance, and pulations, as appro- | ne Administrator, d alterations are apriate, and the |
| DATE OF ISSUANCE | THE TOTAL | CAR D | 1 | CE-3 |

| 6 | | | | |
|-------------------|--|--|--|--|
| U.S. Department | | | | |
| of Transportation | | | | |
| Federal Aviation | | | | |
| Administration | | | | |

MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

| Form Approved OMB No. 2120-0020 | Electronic Tracking Number |
|------------------------------------|----------------------------|
| 11/30/2007 | |

For FAA Use Only

| Federal Aviate Administration | | | | - , | о о . р . ш | , | , point | J., J. | , .pp | ′ | | İ | | |
|--|--|-----------|------------------|------------|--|----------|------------|---|---|--------|----------|-------------|--------------------------|---------------------------------|
| instructions | | sition of | this f | form. | s. See Title 14 of This report is re | | | | | | | | | |
| | Nationality USA | | gistrati 270: | | rk | | | Serial No. 414A0608 | | | | | | |
| 1. Aircraft Make CESSNA | | | | | | | | | Model Series 414A | | | | | |
| 2. Owner | Name (As shown on registration certificate) LONE DUCK AVIATION LLC | | | | | | | Address (As shown on registration certificate) 600 S GERMAN LN UNIT 2 CONWAY, AR 72034-7027 USA | | | | | | |
| | | | | | | | 3. Fo | or FAA L | lse Only | | | | | |
| | | | | | | | | | | | | | | |
| 4. Ty | /pe | | | | | | 5. Un | it Identif | ication | | | | | |
| Repair | Alteration | | Unit | | | Make | | | Model S | | | | Seria | al No. |
| | X | AIRFF | RAME | = | | | | | (As described in Item 1 above) | | | | | |
| | | POWE | ERPL | ANT | | | | | | | | | | |
| | | PROP | 'ELLI | ER | | | | | | | | | | |
| | | APPL | .IANC | Έ | Type Manufacturer | | | | | | | | | |
| | | | | | | | 6. Co | nformity | Statement | | | | | |
| | s Name and | | | | | | B. K | (ind of A | <u> </u> | | | | | |
| | h Intern port Rd. | | , | | | | | | d. Certified Mechanic Manufacturer eign Certified Mechanic C. Certificate No. | | | | | |
| | ings, AR | _ | jar | A-10 | , | | X | Certified | Repair Station Maintenance C | | | CRS # | XKWR110B ECH INTL., | LLC |
| D. I certify have b | y that the repeen made in | n accord | dance | e with | ion made to the the requiremen to the best of my | ts of Pa | art 43 o | ed in iter | n 5 above and d | escrib | ed on th | ne revers | se or attachme | ents hereto |
| Extended rar per 14 CFR I App. B | | | | Signat | ture/Date of Author | | | | | | | | | JURGEN BOEHM 15-January-2019 |
| Duranat t | a the cuth | arity ai | | // | ns specified be | | | | n to Service | | nastad | in the | mannar prose | wihad by the |
| Administrat | tor of the F | Federal | | | Administration | | ne unit | | proved | | Rejecte | ed | | cribed by the |
| 1 1. | AA Flt. Standa spector | ards | | Manu | ıfacturer | | Mainten | ance Orga | nization | | Departm | nent of Tra | d by Canadian ansport | _ |
| BY F | AA Designee | | x | Repa | ir Station | | Inspection | on Authori | zation | Other | (Specify | ') | | |
| Certificate of | | | | Signat | ture/Date of Author | ized Ind | ividual | | | • • | | | | JURGEN BOEHM |
| Designation | | | | _ | | | | | | | | | | 15-January-2019 |

NOTICE

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| | | | USA | N2702L | Jan-15-2019 |
|-----------------------------|---|--|-------------------------------|---------------------------|---------------------------|
| | | | Nationality an | d Registration Mark | Date |
| EMOVED: | | | • | · · | |
| YΤΥ | MAKE/MODEL | P/N | | | |
| ea | Garmin GTX-327 | 011-00490-00 | | | |
| ea | ARC RT-859A | 42260-1028 | | | |
| NSTALLED: | | | | | |
| YΤΥ | MAKE/MODEL | P/N | | | |
| ea | Garmin GTX-345 | 011-03302-00 | | | |
| sec 5, sec | 6, sec 7, sec 8, sec 11, 0 | with Garmin GTX-345 AML STC I/I Ch 10 sec 1, sec 2, Ch 11 sec 1, sec c 18, sec 19, sec 20, Ch 12, sec 1, | c 3, sec 4, sec 5, sec 6, se | c 7, sec 8, sec 9 sec | c 10, sec 11, sec 12, se |
| | min GTX-345 ADS-B trar proved Garmin GTX-345 F | nsponder. Flight Manuał Supplement, dated 12 | 2/21/2017 must be on boar | d the aircraft at all tir | mes. |
| | load analysis was perforn | ned and it was determined that the | total continuous electrical l | oad does not exceed | d the output of the aircr |
| lternator. he aircraft v | veight and balance, and e | quipment list have been revised to | reflect these alterations. | | |
| | | allation see FAA CRS# XKWR110B | | | |
| | installation are as follows | | | | |
| ncluded Ga | rmin document # 190-007 | '34-15 Rev.5, GTX-345 Instructions | For Contiuned Airworthine | ss, in the aircraft ma | aintenance records. |
| | | | END | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | * | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

U.S. Department of Transportation Federal Aviation Administration

MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

| orm Approved MB No. 2120-0020 | Electronic Tracking Number |
|----------------------------------|----------------------------|
| 1/20/2007 | |

For FAA Use Only

| Federal Aviat Administration | .1011 | HIIIIa | ille, r | Owerplant | , 1 10 | pen | er, or | Appliance | , | | İ | | |
|-------------------------------------|--|------------|--------------|------------------------------------|-----------|----------|------------|--|--------|--------------------|-------------|--|--|
| instructions | | ition of t | his form. | | | | | | | | | ent revision thereof) for ult in a civil penalty for each | |
| | Nationality USA | • | tration Ma | | | | | Serial No. 414A0608 | | | | | |
| 1. Aircraft | Make CESSN | A | | | | | | Model 414A | | | | | |
| 2. Owner | | | - | ion certificate) | | | | Address (As shown on registration certificate) 1211 E 14TH ST RUSSELLVILLE, AR 72802 USA | | | | | |
| | | | | | | 3. F | or FAA Ü | se Only | | | | | |
| | The data identified herein complies with applicable airworthiness requirements and is approved only for the above described aircraft subject to conformity inspection by a person authorized in FAR 43. ULT 1 2 2012 Date LIT FSDO FAA Inspector Jamie Black | | | | | | | | | | | | |
| 4. Ty | ype | | | | | 5. Un | it Identif | ication | | | | | |
| Repair | Alteration | ι | nit | | Make | | | | Mod | el | | Serial No. | |
| | X | AIRFR | AME | | | | | (As described in Item 1 above) | | | | | |
| | | POWE | RPLANT | | | | | | | | | | |
| | | PROPI | LLER | | | | | mes | | | | | |
| | | ADDLL | NCE | Туре | | | | | | | | | |
| | | APPLI | ANCE | Manufacturer | | · | | | | | | | |
| | | | | | | 6. Co | nformity | Statement | | | | | |
| A. Agency | s Name and | f Addres | s | | | B. F | Cind of Ag | | | | | | |
| - | vionics, | | _ | | | \vdash | | ertified Mechanic Manufacturer | | | | | |
| | est Lanc ville, A | | Dr. | | | x | | Certified Mechal Repair Station | nic | | W1NR1 | icate No. | |
| 72701 U | • | _, | | | | | | Maintenance O | rgani | zation | | , LIMITED AIRFRAME | |
| have b | een made ir | accord | ance witl | | ts of Pai | rt 43 c | | | | | | se or attachments hereto nat the information | |
| Extended ra per 14 CFR App. B | | | Sign | ature/Date of Au | thorized | Indivi | dual | | | | | BRADY N TERRY | |
| | | | | | | | | to Service | | | | | |
| Administra | tor of the f | Federal | | ons specified be Administration | | e unit | _ | d in item 5 wa proved | as ins | spected Rejecte | | manner prescribed by the | |
| 1 1. | AA Fit. Standa spector | ards | Man | ufacturer | N | /lainten | ance Orga | nization | | Departm | nent of Tra | d by Canadian ansport | |
| BY F | AA Designee | | X Rep | air Station | l lr | nspecti | on Authori | zation | Othe | r (Specify | ') | | |
| Certificate of Designation W1NR1050 | n No. | | Sign | ature/Date of Au | thorized | Indivi | dual | | | | | BRADY N TERRY | |

NOTICE

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| 8. Description of Work Accomplished (If more space is required, attach additional s | heets. Identify with aircraft nationality | and registration r | nark and date work co | ompleted.) |
|--|--|---|---|--|
| | | USA | N2702L | Oct-11-2012 |
| | 1 | Nationality and | Registration Mark | Date |
| N2702L | C414A S/N 010-00330-53 | | 12-0 | CT-2012 |
| 1. REMOVED A BENDIX ART161A RADAR AIRCRAFT RADIO CORPORATION (ARC) 1 PANEL MOUNTED COMM CONTROL UNIT C-1048A PANEL MOUNTED NAV CONTROL PANEL MOUNTED AREA NAVIGATION (RN AN ARC C876A DME IND, AN ARC C1046A | 000 SERIES REMOTE COMMUNICA AN ARC 1000 SERIES REMOTE MC UNIT, AN ARC R-1043A REMOTE M AV) COMPUTER, AN ARC 800 SERI | TION (COMM) TR JUNTED NAVIGA JOUNTED GLIDE ES DISTANCE M | RANSCEIVER (XCVR TION (NAV) RECEIV SLOPE (G/S) REC, A EASURING EQUIPM |), AN ARC C-1038A ER (REC), AN ARC AN ARC RN878A ENT (DME) R/T UNIT, |
| 2. RELOCATED AN EXISTING GARMIN GN AND INSTALLED A COMANT CI505-TNC N | | | | |
| 3. RELOCATED THE EXISTING PRIMARY NUMBER (S/N) 97103643, TO THE SECONI REMOVED ARC 1000 SERIES NAV/COMM THE GARMIN 400 SERIES INSTALLATION PARAGRAPHS 201, 202, AND 203; AC 43.1 AND 11-96; AND MEETS THE REQUIREME WAS ORIGINALLY APPROVED FOR INSTADATE OF JULY 25, 2002. THE GNS430 WAGLOBAL POSITIONING SYSTEM (GPS) AND DISPLAY, THE SECONDARY NAV INPUTS SECONDARY NAV/COMM AUDIO INPUTS | DARY NAV/COMM POSITION IN THE PANEL MOUNTED CONTROL UNITS MANUAL, P/N 190-00140-02, REVISION 3-1B CHANGE 1, PARAGRAPHS 11- NTS OF AC 20-138. THE GNS430 IS LLATION UNDER STC NUMBER SAI S INTERFACED TO THE EXISTING IT, THE EXISTING ARC 101049A NAV OF THE EXISTING ARC 800B INTER | PRIMARY RADI INSTALLATION (REV) T, DAT 30, 11-31, 11-32, MANUFACTURE 20705WI, DATED COMM ANTENNA IND FOR COUR RATED FLIGHT | O STACK VACATED ON COMPLETED IN A ED JUNE 17, 2010; A 11-47, 11-48, 11-66, D UNDER TSO C129 OCTOBER 2, 1998, A (ANT) SYSTEM, TH ISE DEVIATION INDI- | BY THE PREVIOUSL' ACCORDANCE WITH AC 43.13-2B, 11-76, 11-77, 11-89, A CLASS A1, AND WITH AN AMMENDED BE EXISTING GA56 CATOR (CDI) |
| 4. THE COMANT CI505 NAV ANT DIPLEXE TO THE EXISTING NAV ANT SYSTEM TO I INSTALLATION COMPLETED IN ACCORDA PARAGRAPHS 12-11 AND 12-14. | PROVIDE NAV AND GLIDE SLOPE R | ECEIVER SIGNA | L INPUTS TO THE R | ELOCATED GNS430. |
| 5. A GARMIN GNS430 PILOT'S GUIDE, P/N 400/500 SERIES DISPLAY INTERFACES P DISPLAYS PILOT'S GUIDE ADDENDUM, P. FLIGHT MANUAL SUPPLEMENT (FMS) DA COMPLETION OF A FLIGHT TEST EVALUA AIRCRAFT LOGBOOK ENTRY MADE BY A ONLY" MAY BE REMOVED FROM THE PIL | ILOT'S GUIDE ADDENDUM, P/N 190- /N 190-00140-13, REV D; WERE PLA TED <u>0CT 1 2 2012</u> ATION IN ACCORDANCE WITH ADVI N APPROPRIATELY RATED PILOT, | 00140-10, REV D CED IN THE AIR _WAS PLACED SORY CIRCULA |); AND A 400/500 SEI CRAFT RECORDS. / IN THE AIRCRAFT R R AC20-138, PARAGI | RIES OPTIONAL A FAA APPROVED ECORDS. UPON RAPH 8c(2), AND AN |
| 6. THE MAXIMUM CONTINUOUS ELECTR PARAGRAPH 11-33. POST-INSTALLATION INSTALLATION MANUALS AND FOUND TO | GROUND CHECKS WERE PERFOR | OF TOTAL RAT | ED CAPACITY PER DANCE WITH THE M | AC 43.13-1B, ANUFACTURER |
| 7. A LOGBOOK ENTRY UNDER WORK OF RECORDS AND EQUIPMENT LIST REVISE | | O'IN THE AIRCRA | AFT RECORDS. WEI | GHT AND BALANCE |
| 8. AN OPERATIONAL FLIGHT TEST MUST CERTIFICATE AND ENTERED INTO THE A | BE PERFORMED BY AN APPROPE AIRCRAFT RECORDS TO COMPLY V | ATELY RATED | PILOT WITH AT LEAS REMENTS OF FAR 9 | ST A PRIVATE PILOT 91.407(b). |
| 9. INSTRUCTIONS FOR CONTINUED AIR | WORTHINESS ARE ATTACHED AS A | ADDITIONAL SHE | ETS.***END*** | |
| | | | | |
| | 1 | 1. | | |
| | i | • | | |
| | • | | | |

ADDITIONAL SHEETS ARE ATTACHED



U.S. Department of Transportation

Federal Aviation Administration

INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ('For Field Approvals-FAA Form 337)

A/C Make: CESSNA

Model: 414A

S/N: 414A0608

Reg. #: N2702L

Revision: ORIGINAL

Date: 15-OCT-2012

These sixteen item checklist are Instructions for Continued Airworthiness (ICA), and are applicable to

the aircraft listed above when the following equipment is installed:

SYSTEM:

| ITEM | CHECKLIST INFORMATION |
|------|---|
| 1. | Introduction: This section briefly describes the aircraft, engine, propeller, or component that has been altered. Include any other information on the content, scope, purpose, arrangement, applicability, definitions, abbreviations, precautions, units of measurement, referenced publications, and distribution of the ICA as applicable. Comments: AIRFRAME ALTERATION. |
| 2. | Description: Of the major alteration, its functions, including an explanation of its interface with other systems, if any. Comments: RELOCATED AN EXISTING GARMIN GNS430 GLOBAL NAVIGATION SYSTEM AND INSTALLED A COMANT CI505-TNC NAV ANTENNA (ANT) DIPLEXER. |
| 3. | Control: Operation information: Or special procedures, if any. Comments: CONSULT THE GARMIN GNS430 PILOT'S GUIDE, P/N 190-00140-00, REV J; THE GNS430 QUICK REFERENCE GUIDE, P/N 190-00140-01, REV C; THE 400/500 SERIES DISPLAY INTERFACES PILOT'S GUIDE ADDENDUM, P/N 190-00140-10, REV D; THE 400/500 SERIES OPTIONAL DISPLAYS PILOT'S GUIDE ADDENDUM, P/N 190-00140-13, REV D; AND THE FAA APPROVED FLIGHT MANUAL SUPPLEMENT (FMS) FOR DETAILED OPERATING INSTRUCTIONS. |
| 4. | Servicing information: Such as types of fluids used, servicing points, and location of access panels, as appropriate. Comments: N/A. |
| 5. | Maintenance Instructions: Such as recommended inspection/maintenance periods in which each of the major alteration components are inspected, cleaned, lubricated, adjusted, tested, including applicable wear tolerances and work recommended at each scheduled maintenance period. This section refers to the manufacturers' instructions for the equipment installed where appropriate (e.g., functional checks, repairs, inspections.) It should also include any special notes, cautions, or warnings, as applicable. Comments: "ON-CONDITION" MAINTENANCE REQUIRED ONLY. CONSULT FAR PART 43, APPENDIX D, SECTION I, FOR RADIO AND ELECTRONIC EQUIPMENT INSPECTIONS DURING ANNUAL AND 100 HOUR INSPECTIONS. |
| 6. | Trouble shooting information: Information describing possible malfunctions, how to recognize those malfunctions, and the remedial actions to be taken. Comments: CONSULT AC 43.13-1B CHANGE 1, SECTION 2, REGARDING GROUND OPERATIONAL CHECKS FOR AVIONICS EQUIPMENT. CONSULT THE MANUFACTURER MAINTENACE AND INSTALLATION MANUALS FOR DETAILED INFORMATION. |

| 7. | Removal and replacement information: This section describes the order and method of removing and replacing products, parts and any necessary precautions. This section should also describe or refer to manufacturer's instructions to make required tests, trim checks, alignment, calibrations, center of gravity changes, lilting or shoring, etc., if any. Comments: THE GNS430 IS RACK MOUNTED AND CAN BE REMOVED COUNTER-CLOCKWISE ROATION OF THE 3/32 ALLEN-HEX SCREW LOCATED ON THE UNIT'S FRONT PANEL. THE CI505-TNC NAV ANT DIPLEXER IS LOCATED BEHIND THE COPILOT INSTRUMENT PANEL AND CAN BE ACCESSED BY REMOVAL OF THE GLARE SHIELD ASSEMBLY. |
|----|---|
| | Diagrams: Of access plates and information, if needed, to gain access for inspection. Comments: N/A. |
| | Special inspection requirements: Such as X-ray, ultrasonic testing, or magnetic particle inspection, if required. Comments: N/A. |
| | Application of protective treatments: To the affected area after inspection and/or maintenance, if any. Comments: N/A. |
| | Data: Relative to structural fasteners such as type, torque, and installation requirements, if any. Comments: N/A. |
| | List of special tools: Special tools that are required, if any. Comments: N/A. |
| | For commuter category aircraft: The following additional information must be furnished, as applicable: A. Electrical loads B. Methods of balancing flight controls C. Identification of Primary and secondary structures D. Special repair methods applicable to the airplane. Comments: N/A. |
| | Recommended overhaul periods: Are required to be noted on the ICA when an overhaul period has been set by the manufacturer of a component, or equipment. If there is no overhaul period, the ICA should state for item 14: No additional overhaul time limitations. Comments: NO ADDITIONAL OVERHAUL TIME LIMITATIONS. |

.

- 15. Airworthiness Limitation Section: Include any "approved" airworthiness limitations identified by the manufacturer or FAA Type Certificate Holding Office (e.g., An STC incorporated in a larger field approved major alteration may have an airworthiness limitation.) The FAA inspector should not establish, alter, or cancel airworthiness limitations without coordinating with the appropriate FAA Type Certificate Holding Office. If there are no changes to the airworthiness limitations, the ICA should state for item 15: "No additional airworthiness limitations" or 'Not Applicable."

 Comments: NOT APPLICABLE.
- 16. Revision: This section should include information on how to revise the ICA. For example, a letter will be submitted to the local FSDO with a copy of the revised FAA Form 337 and revised ICA. The FAA inspector accepts the change by signing Block 3 and including the following statement: "The attached revised/new Instructions for Continued Airworthiness (date) for the above aircraft or component major alteration have been accepted by the FAA, superseding the Instructions for Continued Airworthiness (date)." Once the revision has been accepted, a maintenance record entry will be made, identifying the revision, its location, date of the Form 337.

 Comments: N/A.

Note:

Implementation and Record Keeping: For major alterations performed in accordance with FAA Field Approval policy, the owner/ operator operating under part 91 is responsible for ensuring that the ICA is made part of the applicable section 91.409 inspection program for their aircraft. This is accomplished when a maintenance entry is made in the aircraft's maintenance record in accordance with section 43.9. This entry records the major alteration and identifies the original ICA location (e.g., Block 8 of FAA Form 337, dated 5/28/98) along with a statement that the ICA is now part of the aircraft's inspection/maintenance requirements.

For major alterations performed in accordance with a field approval on air carrier aircraft, the air carrier operator is

Responsible for ensuring that the ICA is made part of the applicable inspection/maintenance program for their aircraft. If a procedure is not currently included in the operator's manual to incorporate ICA, this process will need to be appropriately addressed (i.e. the operator submits a revision to its maintenance program to the applicable certificate-holding district office (CHUDO).

For aircraft inspected under an Approved Aircraft Inspection Program (AAIP), the operator will submit a change to the CHDO in accordance with section 135.419 b).

For air carrier aircraft inspected using an annual/IO0 hour inspection program, a reference to the new ICA will be made in the aircraft's maintenance record in accordance with section 43.9. This entry records the major alteration and identifies the original ICA location (e.g., ICA is located/attached to Block 8 of FAA Form 337, dated 5/28/98). In addition, the operator will request a revision to the operator's Operations Specifications, additional maintenance requirements, which incorporates the ICA into the inspection program.

Installation Center Repair Station # W1NR105O

Name: WINGS AVIONICS

Address: 421 ERNEST LANCASTER DRIVE FAYETTEVILLE, AR 72701

FAA APPROVED

AIRPLANE FLIGHT MANUAL SUPPLEMENT Garmin GNS 430 VHF Communications Transceiver / VOR/ILS Receiver / GPS Receiver

Aircraft Make and Model: CESSNA 414A

Reg. No. N2702L

Serial No. 414A0608

For aircraft with an FAA Approved Airplane Flight Manual, this document serves as the FAA Approved Flight Manual Supplement for the Garmin GNS 430. For aircraft that do not have an approved flight manual, this document serves as the FAA Approved Supplemental Flight Manual for the Garmin GNS 430.

The Information contained herein supplements or supersedes the basic Airplane Flight Manual only in those areas listed herein. For limitations, procedures, and performance information not contained in this document, consult the basic Airplane Flight Manual.

Date:_

FAA APPROVED

Jamie L. Black

Federal Aviation Administration

Little Rock, AR

DATE: 001 1 2 2012

FAA APPROVED 🔑

Page 1 of 10

Aircraft Make and Model: Cessna 414A N2702L S/N 414A0608

| | LOG OF REVISIONS | | | | | | | |
|--------------------|-------------------|-----------------|----------------|---------------------|--|--|--|--|
| Revision Number | Page Number(s) | Description | * FAA Approved | Date of Approval | | | | |
| A | All | Initial Release | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

FAA APPROVED 17 DATE: OCT 1 2 2012
Page 2 of 10

Aircraft Make and Model: Cessna 414A N2702L S/N 414A0608

Table of Contents

| SECTION | PAGE |
|--------------------------------|------|
| GENERAL | 4 |
| LIMITATIONS | 5 |
| EMERGENCY PROCEDURES | 7 |
| NORMAL PROCEDURES | 8 |
| PERFORMANCE | 10 |
| WEIGHT AND BALANCE | 10 |
| AIRPLANE & SYSTEM DESCRIPTIONS | 10 |

DATE: <u>0CT 1 2 2012</u> Page 3 of 10

Aircraft Make and Model: Cessna 414A N2702L S/N 414A0608

SECTION I GENERAL

- 1. The GNS 430 System is a fully integrated, panel mounted instrument, which contains a VHF Communications Transceiver, a VOR/ILS receiver and a Global Positioning System (GPS) Navigation computer. The system consists of a GPS antenna, GPS Receiver, VHF VOR/LOC/GS antenna, VOR/ILS receiver, VHF COMM antenna and a VHF Communications Transceiver. The primary function of the VHF Communication portion of the equipment is to facilitate communication with Air Traffic Control. The primary function of the VOR/ILS Receiver portion of the equipment is to receive and demodulate VOR, Localizer, and Glide Slope signals. The primary function of the GPS portion of the system is to acquire signals from the GPS system satellites, recover orbital data, make range and Doppler measurements, and process this information in real-time to obtain the user's position, velocity, and time.
- 2. Provided the Garmin GNS 430's GPS receiver is receiving adequate usable signals, it has been demonstrated capable of and has been shown to meet the accuracy specifications for:
 - VFR/IFR enroute, terminal, and non-precision instrument approach (GPS, Loran-C, VOR, VOR-DME, TACAN, NDB, NDB-DME, RNAV) operation within the U.S. National Airspace System in accordance with AC 20-138.
 - One of the approved sensors, for a single or dual GNS 430 installation, for North Atlantic Minimum Navigation Performance Specification (MNPS) Airspace in accordance with AC 91-49 and AC 120-33.
 - The system meets RNP5 airspace (BRNAV) requirements of AC 90-96 and in accordance with AC 20-138 and JAA GAI-20 ACJ 20X4, provided it is receiving usable navigation information from the GPS receiver.

Navigation is accomplished using the WGS-84 (NAD-83) coordinate reference datum. Navigation data is based upon use of only the Global Positioning System (GPS) operated by the United States of America.

DATE: OCT 1 2 2012

FAA APPROVED

Aircraft Make and Model: Cessna 414A N2702L S/N 414A0608

SECTION II LIMITATIONS

The Garmin GNS 430 Pilot's Guide, P/N 190-00140-00, Rev. A, or later appropriate revision, must be immediately available to the flight crew whenever navigation is predicated on the use of the system. In addition to the Pilot's Guide, the 400/500 Series Garmin Optional Displays Pilot's Guide Addendum P/N 190-00140-13 Rev G, or later appropriate revision also must be immediately available to the flight crew if lightning detection, or Traffic Information Service (TIS) are interfaced to the system.

The 400/500 Series Display Interfaces Pilot's Guide Addendum P/N 190-00140-10 Rev D, or later appropriate revision also must be immediately available to the flight crew if the BFGoodrich WX-500 Stormscope® or the BFGoodrich SKYWATCH™ Traffic Advisory System (TAS) is installed.

2. The GNS 430 must utilize the following or later FAA approved software versions:

| Function | Sub-System Version | | | | | | |
|------------------|--------------------|------|------|---------|------|--|--|
| | Main | GPS | COM | VOR/LOC | G/S | | |
| Initial Approval | 2.00 | 2.00 | 2.00 | 1.25 | 2.00 | | |

The Main software version is displayed on the GNS 430 self test page immediately after turnon for 5 seconds. The remaining system software versions can be verified on the AUX group sub-page 2, "SOFTWARE/DATABASE VER".

- 3. IFR enroute and terminal navigation predicated upon the GNS 430's GPS Receiver is prohibited unless the pilot verifies the currency of the data base or verifies each selected waypoint for accuracy by reference to current approved data.
- 4. Instrument approach navigation predicated upon the GNS 430's GPS Receiver must be accomplished in accordance with approved instrument approach procedures that are retrieved from the GPS equipment data base. The GPS equipment database must incorporate the current update cycle.
 - (a) Instrument approaches utilizing the GPS receiver must be conducted in the approach mode and Receiver Autonomous Integrity Monitoring (RAIM) must be available at the Final Approach Fix.
 - (b) Accomplishment of ILS, LOC, LOC-BC, LDA, SDF, MLS or any other type of approach not approved for GPS overlay with the GNS 430's GPS receiver is not authorized.

FAA APPROVED DATE: DATE: DATE: Page 5 of 10

Aircraft Make and Model: Cessna 414A N2702L S/N 414A0608

- (c) Use of the GNS 430 VOR/ILS receiver to fly approaches not approved for GPS require VOR/ILS navigation data to be present on the external indicator.
- (d) When an alternate airport is required by the applicable operating rules, it must be served by an approach based on other than GPS or Loran-C navigation, the aircraft must have the operational equipment capable of using that navigation aid, and the required navigation aid must be operational.
- (e) VNAV information may be utilized for advisory information only. Use of VNAV information for Instrument Approach Procedures does not guarantee Step-Down Fix altitude protection, or arrival at approach minimums in normal position to land.
- 5. If not previously defined, the following default settings must be made in the "SETUP 1" menu of the GNS 430 prior to operation (refer to Pilot's Guide for procedure if necessary):
 - (a) dis, spd m kt (sets navigation units to "nautical miles" and "knots")
 - (b) alt, vsft fpm (sets altitude units to "feet" and "feet per minute")
 - (c) map datum .. WGS 84 (sets map datum to WGS-84, see note below)
 - (d) posndeg-min (sets navigation grid units to decimal minutes)

NOTE: In some areas outside the United States, datums other than WGS-84 or NAD-83 may be used. If the GNS 430 is authorized for use by the appropriate Airworthiness authority, the required geodetic datum must be set in the GNS 430 prior to its use for navigation.

FAA APPROVED DATE: Page 6 of 10

Aircraft Make and Model: Cessna 414A N2702L S/N 414A0608

SECTION III EMERGENCY PROCEDURES

ABNORMAL PROCEDURES

- 1. If Garmin GNS 430 navigation information is not available or invalid, utilize remaining operational navigation equipment as required.
- 2. If "RAIM POSITION WARNING" message is displayed the system will flag and no longer provide GPS based navigational guidance. The crew should revert to the GNS 430 VOR/ILS receiver or an alternate means of navigation other than the GNS 430's GPS Receiver.
- 3. If "RAIM IS NOT AVAILABLE" message is displayed in the enroute, terminal, or initial approach phase of flight, continue to navigate using the GPS equipment or revert to an alternate means of navigation other than the GNS 430's GPS receiver appropriate to the route and phase of flight. When continuing to use GPS navigation, position must be verified every 15 minutes using the GNS 430's VOR/ILS receiver or another IFR-approved navigation system.
- 4. If "RAIM IS NOT AVAILABLE" message is displayed while on the final approach segment, GPS based navigation will continue for up to 5 minutes with approach CDI sensitivity (0.3 nautical mile). After 5 minutes the system will flag and no longer provide course guidance with approach sensitivity. Missed approach course guidance may still be available with 1 nautical mile CDI sensitivity by executing the missed approach.
- 5. In an in-flight emergency, depressing and holding the Comm transfer button for 2 seconds will select the emergency frequency of 121.500 MHz into the "Active" frequency window.

FAA APPROVED

DATE: 00T 1 2 2012
Page 7 of 10

Aircraft Make and Model: Cessna 414A N2702L S/N 414A0608

SECTION IV NORMAL PROCEDURES

1. DETAILED OPERATING PROCEDURES

Normal operating procedures are described in the Garmin GNS 430 Pilot's Guide, P/N 190-00140-00, Rev. A, or later appropriate revision. Normal operating procedures for the Traffic Information Service (TIS) interface, and the Weather Data Link interface are described in the 400/500 Series Garmin Optional Displays Pilot's Guide Addendum, P/N 190-00140-13, Rev G, or later appropriate revision.

Normal operating procedures for the BFGoodrich WX-500 Stormscope® or the BFGoodrich SKYWATCHTM Traffic Advisory System (TAS) interface are described in the 400/500 Series Display Interfaces Pilot's Guide Addendum P/N 190-00140-10 Rev D, or later appropriate revision.

2. PILOT'S DISPLAY

The GNS 430 System data will appear on the Pilot's Secondary Course Deviation Indicator (CDI) located in the pilot instrument panel. The source of data is either GPS or VLOC as annunciated on the display above the CDI key located on the GNS430.

NOTE: It is the pilot's responsibility to assure that published or assigned procedures are correctly complied with. Course guidance is not provided for all possible ARINC 424 leg types. See the GNS 430 Pilot's Guide for detailed operating procedures regarding navigation capabilities for specific ARINC 424 leg types.

3. AUTOPILOT / FLIGHT DIRECTOR OPERATION

Coupling of the GNS 430 System steering information to the autopilot/flight director can be accomplished by engaging the autopilot/flight director in the NAV or APR mode, and selecting the NAV2 function switch located on the Autopilot Mode Selector.

When the autopilot/flight director system is using course information supplied by the GNS 430 System, the course pointer on the Secondary CDI must be manually set to the desired track (DTK) indicated by the GNS 430. For detailed autopilot/flight director operational instructions, refer to the FAA Approved Flight Manual Supplement for the autopilot/flight director.

4. CROSSFILL OPERATIONS

Crossfill Operations is not available for this installation.

FAA APPROVED

DATE: **OCT 1 2 2012**Page 8 of 10

Aircraft Make and Model: Cessna 414A N2702L S/N 414A0608

5. AUTOMATIC LOCALIZER COURSE CAPTURE

By default, the GNS 430 automatic localizer course capture feature is enabled. This feature provides a method for system navigation data present on the external indicators to be switched automatically from GPS guidance to localizer / glide slope guidance as the aircraft approaches the localizer course inbound to the final approach fix. If an offset from the final approach course is being flown, it is possible that the automatic switch from GPS course guidance to localizer / glide slope course guidance will not occur. It is the pilot's responsibility to ensure correct system navigation data is present on the external indicator before continuing a localizer based approach beyond the final approach fix. Refer to the GNS 430 Pilot's Guide for detailed operating instructions.

6. DISPLAY OF LIGHTNING STRIKE DATA

For installations that interface the BFGoodrich WX-500 Stormscope and the GNS 430, lightning strike data detected by the WX-500 will appear on the GNS 430. For detailed operating instructions regarding the interface of the GNS 430 with the WX-500, refer to the WX-500 Pilot's Guide and the 400/500 Series Display Interfaces Pilot's Guide Addendum, P/N 190-00140-10, Rev D, or later appropriate revision for the WX-500 Stormscope interface.

7. DISPLAY OF TRAFFIC ADVISORY DATA

For installations that interface the BFGoodrich SKYWATCH Traffic Advisory System (TAS) and the GNS 430, traffic data detected by the TAS will appear on the GNS 430. For detailed operating instructions regarding the interface of the GNS 430 with the SKYWATCH, refer to the FAA Approved Flight Manual Supplement for the SKYWATCH, the Pilot's Guide for the SKYWATCH and the 400/500 Series Display Interfaces Pilot's Guide Addendum P/N 190-00140-10, Rev D, or later appropriate revision for the SKYWATCH Traffic Advisory System interface.

8. <u>DISPLAY OF TRAFFIC INFORMATION SERVICE DATA</u>

TIS surveillance data uplinked by Air Traffic Control (ATC) radar through the GTX 330 Mode S Transponder will appear on the moving map and traffic display pages of the GNS 430. For detailed operating instructions regarding the interface of the GNS 430 with the GTX 330, refer to the 400/500 Series Garmin Optional Displays Pilot's Guide Addendum, P/N 190-00140-13, Rev G, or later appropriate revision for the TIS System interface.

FAA APPROVED

DATE: OCT 1 2 2012

Aircraft Make and Model: Cessna 414A N2702L S/N 414A0608

SECTION V PERFORMANCE

No change.

SECTION VI WEIGHT AND BALANCE

See current weight and balance data.

SECTION VII AIRPLANE & SYSTEM DESCRIPTIONS

See the Garmin GNS 430 Pilot's Guide for a complete description of the GNS 430 system.

FAA APPROVED

DATE: OCT 1 2 2012
Page 10 of 10

| @ ; |
|-------------------|
| U.S. Department |
| of Transportation |
| Federal Aviation |
| Administration |

MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

| orm Approved IMB No. 2120-0020 1/30/2007 | Electronic Tracking Number |
|--|----------------------------|
| | |

For FAA Use Only

| Federal Aviation |)II \ | - (1111 | aiiit | e, P | ower plant, | , 110 | pen | er, or | Appliance | , | | | |
|------------------------|---|----------------|----------|----------|--|----------------------|--------------------------------------|--|--------------------------------------|--------------|-------------------------|-----------------|---|
| nstructions | and dispos | ition o | f this 1 | form. | s. See Tilte 14 (This report is re | CFR §4: equired l | 3.9, P by law | art 43 Ap (49 U.S | ppendix B, and A .C. §44701). Fai | C 43 lure | .9-1 (or s to report | subseque can re | uent revision thereof) for sult in a civil penalty for each |
| such violation | Nationality | | | | ·k | | | | Serial No. | | | | |
| 4 41 | USA | | 1270 | | | | | | 414A0608 | | | | |
| 1. Aircraft | Make CESSNA | | | | | | | . ! | Model Series 414A | | | | |
| | Name (As shown on registration certificate) | | | | | | | Address (As shown on registration certificate) | | | | | |
| 2. Owner | LONE DUCK AVIATION LLC | | | | | | 1211 E 14TH ST RUSSELLVILLE, AR | | | | | | |
| Z. OWNE | Owner | | | | | | | 72802 USA | ر ظبل | AR | | | |
| | <u> </u> | | | | | | 3. F | or FAA l | Jse Only | ······ | | | |
| | | | | | | | | | | | | <u></u> | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 4. Ty | pe | | | | | | 5. Un | it Identi | fication | | · | | · |
| Repair | Alteration | | Unit | | | Make — | | | | Mod | del | | Serial No. |
| | X | AIRF | RAM | E | | | _ | | (As described | in I | tem 1 ab | ove) | |
| | | POW | /ERPI | _ANT | | | | | | | | | |
| | | PRO | PELL | ER | | | | | | | | ! | |
| | | | | | Туре | | | | | | | | |
| APPLIANCE | | | | | | | | | | | | | |
| Manufacturer | | | | | | | | | • | | | | |
| | | | | 1 | | | 6. Cc | onformit | y Statement | | | | |
| A. Agency's | Name and | Addre | ess | | | · - | | Kind of A | | _ | | | |
| Wings Av | ionics, | Inc | | | | | | U. S. C | ertified Mechanic | ; | | Ma | anufacturer |
| 421 Erne | | | r Dr | · . | | | | | Certified Mecha | nic | | | tificate No. |
| Fayettev 72701 US | - | ıR | | | | | X | | d Repair Station d Maintenance C | man | ization | WINR | 1050 O, LIMITED AIRFRAME |
| | | pair ar | nd/or a | alterati | ion made to the | unit(s) i | dentif | | | | | | rse or attachments hereto |
| have be | en made ir | acco | rdanc | e with | | ts of Pa | rt 43 d | | | | | | that the information |
| Extended ran | ~ _ | 7 | | Signa | ture/Date of Aut | horized | Indiv | idual | | | · · | | BRADY N TERRY |
| per 14 CFR P App. B | an 43 | | | | Snady 1 | /r . | de | n/ | | | | | 15-October-2012 |
| | | | | | | | | | n to Service | | | | |
| | | | | | ns specified be Administration | | e unit | | ed in item 5 wa oproved | s in | spected Rejecte | | manner prescribed by the |
| | A Fit. Standa | ards | | Manu | facturer | N | Mainter | nance Org | anization | | | | ed by Canadian ransport |
| BY FA | A Designee | | х | Repa | ir Station | | nspect | ion Author | ization | Othe | er (Specify | y) | |
| Certificate of | | | | Signa | ture/Date of Aut | horized | Indivi | idual | | <u> </u> | | 1 | BRADY N TERRY |
| Designation W1NR1050 | INU. | | ł | B | nous 1 | . ~ | len | | | | | 1 | 15-October-2012 |
| EAA Form | 227 (40.00) | | | | 1 | | / | / | · | | | | |

NOTICE

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| 8. Description of Work Accompli (If more space is required, attach | ished additional sheets. Identify with aircraft nationa | lity and registration | mark and date work c | ompleted.) |
|---|--|-----------------------|----------------------|-------------|
| | | USA | N2702L | Oct-15-2012 |
| | | Nationality ar | nd Registration Mark | Date |
| N2702L | C414A S/N 010-00330- | 3 | 15-C | OCT-2012 |

- 1. INSTALLED A FACTORY NEW GARMIN GNS430W WIDE AREA AUGMENTATION SYSTEM (WAAS) GLOBAL NAVIGATION SYSTEM USING THE EXISTING GNS430 RACK ASSEMBLY AND EXISTING WIRING HARNESS.
- 2. THE GNS430W GLOBAL NAVIGATION SYSTEM, PART NUMBER (P/N) 011-01060-00, SERIAL NUMBER (S/N) 23434464, WAS INSTALLED IN THE EXISTING PRIMARY GNS430 RACK ASSEMBLY USING THE EXISTING WIRING HARNESS CURRENTLY INTERFACED TO THE NSD360 HORIZONTAL SITUATION INDICATOR (HSI). INSTALLATION COMPLETED USING SUPPLEMENTAL TYPE CERTIFICATE (STC) NUMBER SA01933LA-D, DATED NOVEMBER 6, 2006; WITH AN AMENDED DATE OF NOVEMBER 20, 2007; WITH A REISSUE DATE OF JULY 31, 2009; USING APPROVED MODEL LIST (AML) FOR STC NUMBER SA01933LA-D, DATED NOVEMBER 6, 2006; WITH A REVISED AML DATE OF JULY 31, 2009.
- 3. A GARMIN GNS400W SERIES PILOT'S GUIDE AND REFERENCE, P/N 190-00356-00, REVISION (REV) G; A GNS400W SERIES QUICK REFERENCE GUIDE, P/N 190-00356-01, REV F; A GARMIN 400W/500W SERIES OPTIONAL DISPLAYS PILOT'S GUIDE ADDENDUM, P/N 190-00356-30, REV H; AND A GARMIN 400W/500W SERIES DISPLAY INTERFACES PILOT'S GUIDE ADDENDUM, P/N 190-00356-31, REV D, WERE PLACED IN THE AIRCRAFT RECORDS. A FEDERAL AVIATION ADMINISTRATION (FAA) APPROVED GNS400W SERIES APPROVED FLIGHT MANUAL SUPPLEMENT (AFMS), P/N 190-00356-03, REV B, DATED JULY 31, 2009, WAS PLACED IN THE AIRCRAFT RECORDS.
- 4. THE MAXIMUM CONTINUOUS ELECTRICAL LOAD DOES NOT EXCEED 80% OF TOTAL RATED CAPACITY PER AC 43.13-1B, PARAGRAPH 11-33.
- 5. A LOGBOOK ENTRY UNDER WORK ORDER NUMBER 5563 WAS ENTERED IN THE AIRCRAFT RECORDS. WEIGHT AND BALANCE RECORDS AND EQUIPMENT LIST REVISED.
- 6. POST-INSTALLATION GROUND CHECKS WERE PERFORMED IN ACCORDANCE WITH THE MANUFACTURER INSTALLATION MANUAL AND FOUND TO OPERATE PROPERLY.
- 7. AN OPERATIONAL FLIGHT TEST MUST BE PERFORMED BY AN APPROPRIATELY RATED PILOT WITH AT LEAST A PRIVATE PILOT CERTIFICATE AND ENTERED INTO THE AIRCRAFT RECORDS TO COMPLY WITH THE REQUIREMENTS OF FAR 91.407(b).
- 8. FACTORY SUPPLIED GARMIN 400W SERIES INSTRUCTIONS FOR CONTINUED AIRWORTHINESS, DOCUMENT NUMBER 190-00356-65, REVISION B, DATED JULY 30, 2009, ARE ATTACHED AS ADDITIONAL SHEETS.***END***

United States of America

Department of Transportation - Federal Aviation Administration

Supplemental Tope Certificate

Vaniler SAOL933LA.D.

This actificate Switch Carnin International Inc

vortefices that the changes in the life the first profession of the land and the limitations and conditions the first profession was a first profession of the first professio

Criginal Product Lype Confront Number

Malo

* \$\$ce attached:Approved:Model List (AML)
No. SA01933LA-D for list of approved afferalt
Models and applicable attachmess regulations

System in accordance with EAA Approved Garmin 400W Series Master Data List, Drawing No. 705±C0221-00, skew in accordance with EAA Approved Garmin 400W Series Master Data List, Drawing No. 705±C0221-00, skewision BB, dated October 1, 2007, or later EAA approved revision, or EAA Approved Garmin 500W Series Master Data List, Drawing No. 705±C0221-01; Revision BP, dated October 1, 2007, or later EAA approved revision. Use applicable EAA approved 400 W Series Airplane Flight Manual Supplement, document No. 190-00356-03. Rev. "Original", dated November 20, 2007 or later EAA approved revision: EAA: Approved 500W Series Airplane Flight Manual Supplement document No. 190-00356-03. Rev. "Original", dated November 20, 2007 or later EAA approved revision; or EAA approved Airplane Flight Manual Supplement document No. 190-00357-03. Rev. "Original", dated November 20, 2007 or later EAA approved revision; or EAA approved Airplane Flight Manual supplement as defined in Master Data List 705±C0221-00 or 7005±C0221-00 or 7005±C02

Lineare and Conflices: slinis approval should not be incorporated in any aircraft unless it is determined that the interrelationship between this installation and any provious approved configuration will not introduce any adverse effect upon the aircraft of the holder agrees to permit another person to use this certificate to after the sproduct; the holder shall give the other person written evidence of that permission.

This certificalis and the supercrime delta which is the least the supercript Stuff remain in offices until successful and the supercript superc

Little of application January 131, 2006

Jula of assuration November 6, 2006

July 31, 2009

Lute aniended November 20, 2007

By direction of the Commistrator

David Amstrong

ODA STE Unit Administrator

Garmin International Inc

Virteration of this correlates of the pull shabid by Tayrine of mor excheding (1,000) or imprisonment not exceeding 2, yours; or both

FAA Approved Model List (AML) STC SA01933LA-D

| | | | | Master Drawing List | ring List | |
|--|---|-------------|-----------------|------------------------------|-----------------------|-----------------------|
| | | Ę. | į | Document | Revision | AML |
| Aircraft Make (TCDS Holder) [common name or previous make] | Aircraft Model | Certificate | Certification | iaguny | FAA | Date |
| , | | Number | Basis | | approved revision) | |
| Cessna (Cessna Aircraft Company) | 525, 525A | AIWI | FAR 23 | 005-C0221-00 005-C0221-01 | ٧ | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 177RG | A20CE | FAR 23 | 005-C0221-00 005-C0221-01 | V | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 404, 406 | A25CE | FAR 23 | 005-C0221-00 005-C0221-01 | ď | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 501, 551 | A27CE | FAR 23 | 005-C0221-00 005-C0221-01 | A | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 441 | A28CE | FAR 23 | 005-C0221-00 005-C0221-01 | A | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 336 | A2CE | CAR 3 | 005-C0221-00 005-C0221-01 | V | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | T303 (Crusader) | A34CE | FAR 23 | 005-C0221-00 005-C0221-01 | Ą | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 208, (208A), 208B | A37CE | FAR 23 | 005-C0221-00 005-C0221-01 | ¥ | 11/6/2006 Original |
| Cessna Aircraft Company) | 206, P206, P206A, P206B, P206C, P206D, P206E, TP206A, TP206B, TP206C, TP206D, TP206E, U206, U206A, U206B, U206C, U206D, U206C, U206C, TU206A, TU206B, TU206C, TU206B, TU206C, TU206B, TU206C, TU206B, TU206C, TU206B, TU206C, TU206B, TU206C, | A4CE | CAR 3 FAR 23 | 005-C0221-00 005-C0221-01 | V | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 337, 337A, (USAF 02B), 337B, T337B, 337C, 337E, T337E, T337E, T337C, 337D, T337D, M337B (USAF 02A), 337F, T337F, 337G, T337G, 337H, P337H, T337H, T337H, | A6CE | CAR 3 FAR 23 | 005-C0221-00 005-C0221-01 | V | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 120, 140 | A-768 | CAR 3 | 005-C0221-00 005-C0221-01 | V | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 190, 195, 195A, 195B | A-790 | CAR 3 | 005-C0221-00 005-C0221-01 | A | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 170, 170A, 170B | A-799 | CAR 3 | 005-C0221-00 005-C0221-01 | ¥. | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) | 401, 401A, 401B, 402, 402A, 402B, 402C, 411, 411A, 414, 414A, 421, 421A, 421B, 421C, 425 | A7CE | CAR 3 | 005-C0221-00 005-C0221-01 | ď | 11/6/2006 Original |
| Cessna (Cessna Aircraft Company) [Columbia or Lancair] | LC40-550FG, LC41-550FG, LC42-550FG | A00003SE | FAR 23 | 005-C0221-00 005-C0221-01 | A | 11/6/2006 Original |

5 of 13

Issued: November 6, 2006 -Revised÷January-14,-2014—

FAA APPROVED

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL

GARMIN 400W SERIES GRS-WAAS NAVIGATION SYSTEM as installed in

Cessna 414A
Make and Model Airplane

Reg: No. N2702L S/N 414A0608

This document serves as an Airplane Flight Manual Supplement or as a Supplemental Airplane Flight Manual when the aircraft is equipped with the Garmin 400W Series unit. This document must be carried in the airplane at all times when the Garmin 400W Series unit is installed in accordance with STC SA01933LA-D.

The information contained herein supplements or supersedes the information made available to the operator by the manufacturer in the form of clearly stated placards, markings, or manuals or in the form of an FAA approved Airplane Flight Manual, only in those areas listed herein. For limitations, procedures and performance information not contained in this document, consult the basic placards, markings, or manuals or the basic FAA approved Airplane Flight Manual.

FAA Approved By:

David G Armstrong
ODA STC Unit Administrator
Garmin International, Inc.
ODA-240087-CE

Date:

190-00356-03 Rev. B. Page 1 of 16

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

| B All 7/31/09 Added D' to STC number, added LP OBA STC Unit Administrator | 12.2 | | Ľ | OG OF REVISIO | NS |
|---|----------------|-----|----------|---------------|--|
| Original Supplement Mgr. Flt. Test Br., ANM-160 FAA, Los Angeles ACO Transport Airplane Directora Date Nov. 20, 2007 Added '-D' to STC number, added LP Add Ambiestrate OBA STC Unit Administrate | Rėv. No. | No. | , - | Description | FAA Approved |
| 7/31/09 STC number, Janua G Amilion added LP ODA STC Unit Administration | | All | 11-20-07 | | Mgr. Flt. Test Br., ANM-160L FAA, Los Angeles ACO Transport Airplane Directorate |
| approach type ODA-240087-CE Garmin International, Inc. | B _c | Aļl | 7/31/09 | STC number, | |

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

Table of Contents

| SECTIO | N | PAGE |
|---------|---|---------|
| Section | 1. GENERAL | 4 |
| 1.1 | Garmin 400W Series GPS/WAAS Nav Com | 4 |
| 1.2 | Operation | 5 |
| 1.3 | Class II Oceanic, Remote, and other Operations: | 5 |
| Section | 2. LIMITATIONS | 6 |
| 2.1 | Pilot's Guide | 6 |
| 2.2 | System Software: | 6 |
| 2.3 | Navigation Database | 7 |
| 2.4 | Terrain Database | 7 |
| 2.5 | Navigation | 8 |
| 2.6 | Approaches | 8 |
| 2.7 | Autopilot Coupling | 9 |
| 2.8 | Terrain Display | 9 |
| 2.9 | VNAV | 9 |
| 2.10 | Weather Display | 9 |
| 2.11 | Traffic Display | 10 |
| Section | 3. EMERGENCY PROCEDURES | 11 |
| 3.1 | Emergency Procedures | 11 |
| 3.2 | Abnormal Procedures | 11 |
| Section | 4. NORMAL PROCEDURES | 13 |
| 4.1 | Approaches with Vertical Guidance | 13 |
| 4.2 | Approaches without Vertical Guidance | 14 |
| For a | dditional information on LP approaches refer to the 400W Seri | es unit |
| Pilot' | 's Guide. | 14 |
| 4.3 | Autopilot Operation | 14 |
| 4.4 | Coupling the Autopilot during approaches | 14 |
| 4.5 | WFDE Prediction Program | 16 |
| Section | 5. PERFORMANCE | 16 |
| Section | 6. WEIGHT AND BALANCE | 16 |
| Section | 7. SYSTEM DESCRIPTIONS | 16 |

190-00356-03 Rev. B Page 3 of 16

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

Section 1. GENERAL

1.1 Garmin 400W Series GPS/WAAS Nav Com

The Garmin 400W Series GPS/WAAS Navigator is a panel-mounted product that contains a GPS/WAAS receiver for GPS approved primary navigation, under TSO C146a (plus optional VHF Com and VHF Nav radios) in an integrated unit with a moving map and color display. The 400W Series unit features a graphical display which may also be used to depict traffic, weather, or terrain data.

The navigation functions are operated by dedicated keys and graphical menus which are controlled by the buttons and the dual concentric rotary knob along the bottom and right side of the display.

Optional VHF Com and VHF Nav radio functions are controlled via dedicated buttons and knobs on the left side of the display and adjacent to frequencies they are controlling.

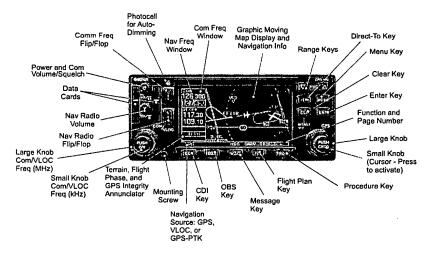


Figure 1 - 400W Series Control and Display Layout

190-00356-03 Rev. B Page 4 of 16

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

1.2 Operation

GPS/WAAS TSO-C146a Class 3 Operation: The Garmin 400W Series unit, when installed in accordance with STC SA01933LA-D, uses GPS and WAAS (within the coverage of a Space-Based Augmentation System complying with ICAO Annex 10) for enroute, terminal area, non-precision approach operations (including "GPS", "or GPS", "RNAV", "LNAV", and "LP" approaches), and approach procedures with vertical guidance (including "LNAV/VNAV" and "LPV").

Navigation is accomplished using the WGS-84 (NAD-83) coordinate reference datum. GPS navigation data is based upon use of only the Global Positioning System (GPS) operated by the United States of America.

1.3 Class II Oceanic, Remote, and other Operations:

The Garmin 400W Series, as installed, has been found to comply with the requirements for GPS primary means of Class II navigation in oceanic and remote airspace, when used in conjunction with WAAS Garmin Prediction Program part number 006-A0154-03. Oceanic operations are supported when the 400W Series unit annunciates OCN. This provides an alarm limit of four NMI and a mask angle of five degrees. The 400W series unit also has the ability to predict RAIM availability at any waypoint in the database or if WAAS corrections are expected to be absent or disabled. This AFMS does not constitute an operational approval for Oceanic or Remote area operations. Additional equipment installations or operational approvals may be required.

- a) Oceanic navigation requires an additional approved long range oceanic and/or remote area navigation system with independent display, sensors, antenna, and power source. (It may be a second 400W/500W Series unit.)
- b) Redundant VHF Com and VHF Nav systems may be required for other than U.S. 14 CFR Part 91 operations. Check foreign regulation requirements as applicable. (It may be a second 400W/500W Series unit.)
- c) Operations approval <u>may</u> be granted for the use of the 400W Series unit RAIM prediction function in lieu of the Prediction Program for operators requiring this capability. Refer to your appropriate civil aviation authorities for these authorizations.

190-00356-03 Rev. B Page 5 of 16

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

Section 2. LIMITATIONS

2.1 Pilot's Guide

The GARMIN 400W Series Pilot's Guide, part number and revision listed below (or later applicable revisions), must be immediately available for the flight crew whenever navigation is predicated on the use of the 400W Series unit.

- 400W Series Pilot's Guide & Reference P/N 190-00356-00 Rev E
- 400W/500W Series Optional Displays P/N 190-00356-30 Rev F
- 400W/500W Series Display Interfaces P/N 190-00356-31 Rev B

This AFM supplement does not grant approval for IFR operations to aircraft limited to VFR operations. Additional aircraft systems may be required for IFR operational approval. Systems limited to VFR shall be placarded in close proximity to the 400W Series unit

"GPS LIMITED TO VFR USE ONLY".

2.2 System Software:

The system must utilize the Main and GPS software versions listed below (or later FAA approved versions). The software versions are displayed on the self-test page immediately after turn-on for approximately 5 seconds or they can be accessed in the AUX pages.

Subsequent software versions may support different functions. Check the 400W Series Pilot's Guide for further information.

Table 1 - Approved Software Versions

| Software Item | Approved Software Version (or later FAA approved versions for this STC) | | | | |
|-----------------|---|----------------------|--|--|--|
| | SW version | As displayed on unit | | | |
| Main SW Version | 3.30 | 3.30 | | | |
| GPS SW Version | 3.2 | 3.2 | | | |

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

2.3 Navigation Database

The 400W Series unit database card must be installed. (IAW the TSO deviations granted to Garmin for the 400W unit, navigation database cards may not be marked with the part number. The software automatically precludes invalid databases for use by the 400W)

- a) IFR enroute and terminal navigation is prohibited unless the pilot verifies the currency of the database or verifies each selected waypoint for accuracy by reference to current approved data.
- b) GPS instrument approaches using the 400W Series units are prohibited, unless the 400W Series unit's approach data is verified by the pilot or crew to be current. Instrument approaches must be accomplished in accordance with an approved instrument approach procedure that is loaded from the 400W Series unit database.
- c) Installations with dual 400W/500W Series units will only crossfill between units when they contain the same database cycle. Updating of each database must be accomplished on the ground prior to flight.

2.4 Terrain Database

The 400W Series unit supports Terrain and requires a Terrain database card to be installed in order for the feature to operate. The table below lists compatible database cards for the 400W series. Each of the data base cards contains the following data:

- a) The Terrain Database has an area of coverage from North 75° Latitude to South 60° Latitude in all longitudes.
- b) The Airport Terrain Database has an area of coverage that includes the United States, Canada, Mexico, Latin America, and South America.
- c) The Obstacle Database has an area of coverage that includes the United States, and is updated as frequently as every 56 days.

NOTE: The area of coverage may be modified as additional terrain data sources become available.

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

Table 2 - Approved Terrain Database Cards

| Part Number | Description |
|--------------|----------------------------------|
| 010-10201-20 | Data Card, TAWS / Terrain, 128MB |
| 010-10201-21 | Data Card, TAWS / Terrain, 256MB |

2.5 Navigation

No navigation is authorized north of 89° (degrees) north latitude or south of 89° (degrees) south latitude.

2.6 Approaches

- a) During GPS approaches, the pilot must verify the 400W Series unit is operating in the approach mode. (LNAV, LNAV+V, L/VNAV, LP, or LPV)
- b) When conducting approaches referenced to true North, the heading selection on the AUX pages must be adjusted to TRUE.
- c) Accomplishment of an ILS, LOC, LOC-BC, LDA, SDF, MLS, VOR approach, or any other type of approach not approved for GPS overlay, is not authorized with GPS navigation guidance.
- d) Use of the GNS 430W VOR/LOC/GS receiver to fly approaches not approved for GPS requires VOR/LOC/GS navigation data to be present on the external indicator (i.e. proper CDI source selection).
- e) For aircraft with remote source selection annunciation or remote GPS navigation annunciations installed, conducting IFR approaches is prohibited if the remote annunciation is found to be inoperative during pre-flight. (This limitation does not prohibit the conduct of an IFR approach if the required remote annunciation fails during flight. The indications provided on the 400W Series unit display may be used as a backup).
- f) Except in emergency conditions, IFR approaches are prohibited whenever any physical or visual obstruction (such as a throw-over yoke) restricts pilot view or access to the 400W Series unit or the affected CDI.

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

2.7 Autopilot Coupling

IFR installations of a Garmin 400W Series unit allow the operator to fly all phases of flight based on the navigation information presented to the pilot; however, not all modes may be coupled to the autopilot. All autopilots may be coupled in Oceanic (OCN), Enroute (ENR), and Terminal (TERM) modes; however, the FAA requires that vertical coupling of an autopilot for approaches be demonstrated to meet their intended function and provide safe and proper operation to published minimums. This installation is limited to:

| V | No limitations for autopilot coupling. |
|---|---|
| | Lateral GPS coupling (LNAV only). For 430W units: The GS of an ILS (VLOC) may be coupled to the autopilot without any limitations |

This limitation may be removed after an FAA Flight Test demonstration. Contact Garmin International, Tech Support for additional information.

2.8 Terrain Display

Terrain refers to the display of terrain information. Pilots are NOT authorized to deviate from their current ATC clearance to comply with terrain/obstacle alerts. Terrain unit alerts are advisory only and are not equivalent to warnings provided by TAWS. Navigation must not be predicated upon the use of the terrain display.

The terrain display is intended to serve as a situational awareness tool only. By itself, it may not provide either the accuracy or the fidelity on which to base decisions and plan maneuvers to avoid terrain or obstacles.

2.9 VNAV

VNAV information may be utilized for advisory information only. Use of VNAV information for Instrument Approach Procedures does not guarantee Step-Down Fix altitude protection, or arrival at approach minimums in a normal position to land.

2.10 Weather Display

190-00356-03 Rev. B Page 9 of 16

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

If an optional weather receiver is interfaced to the 400W Series unit, the weather information displayed is limited to supplemental use only and may not be used in lieu of an official weather data source.

2.11 Traffic Display

Traffic may be displayed on the 400W Series unit when connected to an approved optional TCAS, TAS, or TIS traffic device. These systems are capable of providing traffic monitoring and alerting to the pilot. Traffic shown on the display may or may not have traffic alerting available. The display of traffic is an aid to visual acquisition and may not be utilized for aircraft maneuvering. Display of this traffic data and related operations are described in the 400W Series unit Pilot's Guide.

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

Section 3. EMERGENCY PROCEDURES

3.1 Emergency Procedures

No change.

3.2 Abnormal Procedures

- a) If the Garmin 400W Series unit GPS navigation information is not available, or is invalid, utilize other remaining operational navigation equipment installed in the airplane as appropriate. If the 400W Series unit loses GPS position and reverts to Dead Reckoning mode (indicated by the annunciation of "DR" in the lower left of the display), the moving map will continue to be displayed. Aircraft position will be based upon the last valid GPS position and estimated by Dead Reckoning methods. Changes in airspeed or winds aloft can affect the estimated position substantially. Dead Reckoning is only available in Enroute mode; Terminal and Approach modes do not support DR.
- b) If a "Loss of Integrity" (INTEG) message is displayed during:
 - Enroute/Terminal: continue to navigate using GPS equipment and periodically cross-check the GPS guidance to other approved means of navigation.
 - GPS Approach: GPS approaches are not authorized under INTEG
 Execute missed approach or revert to alternate navigation.
- c) During a GPS LPV precision approach or GPS LNAV/VNAV approach, the 400W Series unit will downgrade the approach if the Vertical alarm limits are exceeded. This will cause the vertical guidance to flag as unavailable. The procedure may be continued using the LNAV only minimums.
- d) During a GPS LP approach, the 400W Series may downgrade the approach prior to the Final Approach Fix if alarm limits are exceeded. If this occurs, a message will be displayed advising the pilot to use LNAV minimums. If alarm limits are exceeded after the Final Approach Fix, the 400W Series unit will flag the lateral guidance and generate a system message "ABORT APPROACH loss of navigation". Immediately upon viewing the message the unit will revert to Terminal alarm limits. If the position integrity is within these limits lateral guidance will be restored

190-00356-03 Rev. B Page 11 of 16

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

and the GPS may be used to execute the missed approach, otherwise alternate means of navigation should be utilized.

e) During any GPS approach in which precision and non-precision alarm limits are exceeded, the 400W Series unit will flag the lateral guidance and generate a system message "ABORT APPROACH loss of navigation". Immediately upon viewing the message the unit will revert to Terminal alarm limits. If the position integrity is within these limits lateral guidance will be restored and the GPS may be used to execute the missed approach, otherwise alternate means of navigation should be utilized.

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

Section 4. NORMAL PROCEDURES

Refer to the 400W Series unit Pilot's Guide defined in paragraph 2.1 on page 6 of this document for normal operating procedures. This includes all GPS operations, VHF COM and NAV, and Multi-Function Display information. For information on TIS traffic, or data linked weather see the Pilot's Guide addendum for optional displays. For information on active traffic sensor or Stormscope operation and displays see the Pilot's Guide addendum for display interfaces.

Although intuitive and user friendly the 400W Series unit requires a reasonable degree of familiarity to prevent operations without becoming too engrossed at the expense of basic instrument flying in IMC and basic see-and-avoid in VMC. Pilot workload will be higher for pilots with limited familiarity in using the unit in an IFR environment, particularly without the autopilot engaged. Garmin provides excellent training tools with the Pilot's Guide and PC based simulator. Pilots should take full advantage of these training tools to enhance system familiarization. Use of an autopilot is strongly encouraged when using the 400W Series unit in IMC conditions

4.1 Approaches with Vertical Guidance

The 400W Series unit supports three types of GPS approaches with vertical guidance: LPV approaches, LNAV/VNAV (annunciated as L/VNAV) approaches, and LNAV approaches with advisory vertical guidance (annunciated as LNAV+V). For LNAV approaches with advisory vertical guidance, the 400W Series will annunciate LNAV+V indicating vertical guidance is available. LNAV minimums will be controlling in this case.

NOTE:

If flying an LPV or LNAV/VNAV approach, be prepared to fly the LNAV only approach prior to reaching the final approach fix (FAF). If the GPS integrity is not within vertical approach limits, the system will flag the vertical guidance. This may be annunciated by a downgrade to LNAV message.

For additional information on approaches with vertical guidance refer to the 400W Series unit Pilot's Guide.

190-00356-03 Rev. B Page 13 of 16

GARMIN Ltd. or its subsidiaries c/o Garmin International 1200 E. 151st Street, Olathe, KS 66062 USA

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

4.2 Approaches without Vertical Guidance

The 400W Series unit supports Localizer Performance approaches (annunciated as LP). Published LP minimums will be controlling in this case.

NOTE:

If flying an LP approach, be prepared to fly the LNAV only approach prior to reaching the final approach fix (FAF). If the GPS integrity is not within LP approach limits, the system will notify the pilot by a downgrade to LNAV message.

For additional information on LP approaches refer to the 400W Series unit Pilot's Guide.

4.3 Autopilot Operation

The Garmin 400W Series may be coupled to an optional autopilot if installed in the aircraft when operating as prescribed in the LIMITATIONS section of this manual. For lateral guidance, some installations may utilize GPSS or GPS Roll Steering in lieu of the analog deviation information. If an HSI is used with GPSS engaged, the pilot should rotate the course pointer as prompted on the 400W Series unit to prevent loss of situational awareness and to prevent the aircraft from turning inappropriately if the autopilot is switched from digital (GPSS) to analog mode. For autopilot operational instructions, refer to the FAA approved Flight Manual or Flight Manual Supplement for the autopilot.

4.4 Coupling the Autopilot during approaches

The Garmin 400W Series supports analog and digital (GPSS) control interfaces to an optionally installed autopilot. Some autopilots revert to ROLL mode (wings level) and/or flag a NAV failure if the digital data becomes unavailable or is inhibited. The CDI selection of VLOC should inhibit the digital control interface. When switching between GPS and VLOC the pilot should be aware that the autopilot may need to be reengaged into APR or NAV mode after changing the CDI source.

Autopilot coupling to GPS vertical guidance requires that the autopilot be engaged in an analog APR mode identical to coupling to an ILS. Some autopilots may revert to ROLL mode when the navigation outputs of the 400W Series unit sequence to the final approach fix. In these installations

190-00356-03 Rev. B Page 14 of 16

GARMIN Ltd. or its subsidiaries c/o Garmin International 1200 E. 151st Street, Olathe, KS 66062 USA

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

the unit will be configured to PROMPT the pilot to "Enable the autopilot approach outputs" in order to prevent the autopilot from entering ROLL mode without the pilot being aware of the transition.

This installation prompts the pilot and requires the pilot to enable the A/P outputs just prior to engaging the autopilot in APR mode.

This installation supports a seamless transition from digital (GPSS) to analog guidance for the autopilot. To capture the vertical guidance, the pilot may engage the autopilot in APR mode at any time when the GPS Glide Slope (VDI) becomes valid (displayed without a FLAG).

This installation interfaces to the autopilot in analog mode only. To capture the vertical guidance, the pilot may engage the autopilot in APR mode at any time when the GPS Glide Slope (VDI) becomes valid.

The autopilot does not support any vertical capture or tracking in this installation.

GARMIN Ltd. or its subsidiaries c/o Garmin International 1200 E. 151st Street, Olathe, KS 66062 USA

AIRPLANE FLIGHT MANUAL SUPPLEMENT or SUPPLEMENTAL AIRPLANE FLIGHT MANUAL for a Garmin 400W Series Navigation System

Analog only autopilots should use APR mode for coupling to LNAV approaches. Autopilots which support digital roll steering commands (GPSS) may utilize NAV mode and take advantage of the digital tracking during LNAV only approaches.

4.5 WFDE Prediction Program

The Garmin WAAS Fault Detection and Exclusion (WFDE) Prediction Program is required for Remote/Oceanic operations.

The Prediction Program should be used in conjunction with the Garmin 400W/500W Simulator. After entering the intended route of flight in the Simulator flight plan the pilot selects the FDE Prediction Program under the Options menu of the Simulator program.

For detailed information refer to the WFDE prediction program instructions (190-00643-01). The availability of FDE is only required for Oceanic or Remote operations.

Section 5. PERFORMANCE

No change.

Section 6. WEIGHT AND BALANCE

See current weight and balance data.

Section 7. SYSTEM DESCRIPTIONS

See Garmin 400W Series unit Pilot's Guide for a complete description of the 400W Series unit.

400W Series Instructions for Continued Airworthiness

Document Number 190-00356-65 Rev. B

Garmin Ltd. Or its subsidiaries c/o Garmin International, Inc. 1200 E. 151st Street Olathe, Kansas 66062 USA

Record of Revision

| Rev. | Date | Description of Change |
|------|----------|--|
| 1 | 10-19-06 | Initial Release |
| Α | 11-03-06 | Revision for STC Issuance |
| В | 07-30-09 | Add the "-D" to STC number when reissued under ODA |
| | | |
| | | |
| | | |
| | | |
| | | |

GARMIN.

| 1. | INTRODU | JCTION | 3 |
|----|---------|---|-----|
| | 1.1 | PURPOSE | 3 |
| | 1.2 | Scope | 3 |
| | 1.3 | Document Control | |
| | 1.4 | Airworthiness Limitations Section | |
| | 1.5 | Permission to Use Certain Documents | 3 |
| | 1.6 | Definitions | . 3 |
| 2. | INSTRUC | CTIONS FOR CONTINUED AIRWORTHINESS | |
| | 2.1 | Introduction | |
| | 2.2 | Description of Alteration | . 4 |
| | 2.3 | Control, Operating Information | . 4 |
| | 2.4 | Servicing Information | . 5 |
| | 2.5 | Periodic Maintenance Instructions | . 5 |
| | 2.6 | Troubleshooting Information | . 5 |
| | 2.7 | Removal and Replacement Information | . 6 |
| | 2.8 | Diagrams | |
| | 2.9 | Special Inspection Requirements | |
| | 2.10 | Application of Protective Treatments | |
| | 2.11 | Data Relative to Structural Fasteners | |
| | | Special Tools | |
| | 2.13 | Additional Instructions | |
| | 2.14 | - · · · · · · · · · · · · · · · · · · · | |
| | 2.15 | ICA Revision and Distribution | |
| | | Assistance | |
| | 2 17 | Implementation and Record Keeping | . 7 |



1. INTRODUCTION

1.1 PURPOSE

This document is designed for use by the installing agency of the Garmin Model 400W Series GPS/WAAS Nav/Com as Instructions for Continued Airworthiness in response to Federal Aviation regulation (FAR) Part 23.1529, and Part 23 Appendix G. The ICA includes information required by the operator to adequately maintain the Garmin Models 400W series installed under Approved Model List (AML) STC SA01933LA-D.

1.2 Scope

This document identifies the Instruction for Continued Airworthiness for the modification of the aircraft for installation of the Garmin Models 400W series GPS/WAAS Nav/Com installed under Approved Model List (AML) STC SA01933LA-D.

1.3 Document Control

This document shall be released, archived, and controlled in accordance with the Garmin document control system. When this document is revised, refer to Section 2.15 for information on how to gain FAA acceptance or approval and how to notify customers of changes.

1.4 Airworthiness Limitations Section

There are no additional Airworthiness Limitations as defined in 14 CFR § 23, Appendix G. G23.4 that result from this modification. The Airworthiness Limitations section is FAA approved and specifies maintenance required under §§43.16 and 91.403 of the Federal Aviation Regulations unless an alternative program has been FAA approved.

1.5 Permission to Use Certain Documents

Permission is granted to any corporation or person applying for approval of a Garmin Model 400W Series to use and reference appropriate STC documents to accomplish the Instructions for Continued Airworthiness and show compliance with STC engineering data. This permission does not construe suitability of the documents. It is the responsibility of the applicant to determine the suitability of the documents for the ICA.

1.6 Definitions

The following terminology is used within this document:

- 1) AC: Advisory Circular
- 2) ACO: Aircraft Certification Office
- 3) AEG: Aircraft Evaluation Group
- 4) CFR: Code of Federal Regulations
- 5) DER: Designated Engineering Representative
- 6) FAA: Federal Aviation Administration



7) IAW: In Accordance With

8) ICA: Instructions for Continued Airworthiness

9) MFD: Multi-Function Display unit

10) PMI: Primary Manufacturing Inspector

11) POI: Primary Operations Inspector

12) STC: Supplemental Type Certificate

13) TC: Type Certification or Type Certificate

14) TSO: Technical Standard Order

2. INSTRUCTIONS FOR CONTINUED AIRWORTHINESS

2.1 Introduction

Content, Scope, Purpose and Arrangement:

This document identifies the Instructions for Continued Airworthiness for the modification of the aircraft by installation of the Garmin Models 400W

Series GPS/WAAS Nav/Com.

Applicability:

Applies to aircraft altered by installation of the Garmin Model 400W Series GPS/WAAS Nav/Com.

Definition of Abbreviations:

See Section 1.6

Precautions:

None

Units of measurement:

None

Referenced publications:

190-00356-02 Rev. G 400W Series Installation

Manual

(or later FAA approved revisions)

005-C0221-00 Rev. F 400W Series STC Master

Data List

Retention:

This document, or the information contained within, will be included in the aircraft's permanent records.

2.2 Description of Alteration

The Garmin Model 400W Series GPS/WAAS Nav/Com unit is a 6 ¼ inch wide panel mounted unit with all the interface connections behind the instrument panel. Installation of the Garmin Model 400W Series GPS/WAAS Nav/Com system interfaces, specific for the aircraft installation, is documented in the GNS 400W Series Post-Installation Checkout Log that is retained as part of the aircraft's permanent records. The 400W Series units combine a large number of easily acceptable controls to use the color multifunction display, Nav and Com transceiver, GPS/WAAS navigator in a single unit.

2.3 Control, Operating Information

See the 400W Series Installation Manual, listed under the reference documentation in paragraph 2.1 of this document, for system operation and self-test information.



2.4 Servicing Information

None. In the event of system failure, return the unit to the manufacturer or an approved Garmin repair station.

2.5 Periodic Maintenance Instructions

The 400W Series units are designed to detect internal failure. A thorough self-test is executed automatically upon application of power to the units, and built-in test is continuously executed. Detected errors are indicated on the equipment via failure annunciations and maintenance is on-condition.

Operation of the 400W Series unit is not permitted unless an inspection as described in this section has been completed within the preceding 12 calendar months. Conduct a visual inspection on the 400W series unit and its wire harness to insure installation integrity:

- 1. Inspect the unit for security of attachment.
- 2. Inspect all knobs and buttons for legibility.
- 3. Inspect condition of wiring, routing and attachment/clamping.

2.5.1 Cleaning the Front Panel

The front bezel, keypad, and display can be cleaned with a soft cotton cloth dampened with clean water. DO NOT use any chemical-cleaning agents. Care should be taken to avoid scratching the surface of the display.

2.5.2 Display Backlight

The display backlight lamp is rated by the manufacturer as having a usable life of 20,000 hours. This life may be more or less than the rated time depending on the operating conditions of the 400W series unit. Over time, the backlight lamp may dim and the display may not perform as well in direct sunlight conditions. The user must determine by observation when the display brightness is not suitable for its intended use. Contact the Garmin factory repair station when the backlight lamp requires service.

2.5.3 Battery Replacement

The 400W series has an internal keep-alive battery that will last about 10 years. The battery is used for GPS system information. Regular planned replacement is not necessary. The 400W series will display a 'low battery' message when replacement is required. Once the low battery message is displayed, the battery should be replaced within 1 to 2 months.

If the battery is not replaced and becomes totally discharged, the 400W series unit will remain fully operational, but the GPS signal acquisition time may be increased. This acquisition time can be reduced by entering a new seed position each time the unit is powered on. There is no loss of function or accuracy of the 400W series unit with a dead battery.

The battery must be replaced by the Garmin factory repair station or factory authorized repair station.

2.6 Troubleshooting Information

If error indications are displayed on the 400W series unit, consult the Troubleshooting section contained in the 400W Series Installation Manual, listed under reference documentation in paragraph 2.1 of this



document. The '400W Series Post-Installation Checkout Log' in the aircraft permanent records includes the configuration information for the installation. (See Section 5 in the 400W Series Installation Manual for a sample Log).

2.7 Removal and Replacement Information

If the 400W series unit is removed and reinstalled, verify that the 400W series unit power-up self-test sequence is successfully completed and no failure messages are annunciated.

If the 400W series unit is removed for repair and reinstalled, or if the 400W unit is removed and replaced with a different 400W series unit, then follow 'Post Installation Configuration & Checkout Procedures' procedures contained in the 400W Series Installation Manual listed in paragraph 2.1 of this document, and verify the 400W unit power-up self-test sequence is successfully completed and no failure messages are annunciated.

If any work has been done on the aircraft that could affect the system wiring, antenna cable, or any interconnected equipment, verify the 400W series unit power-up self-test sequence is successfully completed and no failure messages are annunciated.

To remove the 400W series unit from the mounting rack, insert a 3/32-inch hex drive tool into the access hole at the bottom of the unit face. Rotate the hex tool counterclockwise until the unit is forced out about 3/8 inches and can be freely pulled from the rack.

The 400W unit is installed in the rack by sliding it straight in until it stops, about 1 inch short of the final position. Insert the hex drive tool into the access hole at the bottom of the unit face. Rotate the hex tool clockwise while pressing on the left side of the bezel until the unit is firmly seated in the rack.

Note: There are no special handling requirements for the 400W series units.

2.8 Diagrams

Refer to the 400W Series Installation Manual (listed under reference documentation in section 2.1 of this document) for drawings applicable to this installation. Point to point wiring diagrams are in Appendix H of the 400W Series Installation Manual. Refer to the GNS 400W Series Post-Installation Checkout Log retained in the aircraft permanent for a list of the interfaced equipment. The antenna cables are routed between the 400W series unit and the antenna with disconnects at each unit. The antenna cable typically is routed behind interior panels in the fuselage.

2.9 Special Inspection Requirements

None, N/A.

2.10 Application of Protective Treatments

None, N/A.

2.11 Data Relative to Structural Fasteners

None, N/A.



2.12 Special Tools

No special tools are required for system checkout. See 400W Series Installation Manual listed in reference documentation in section 2.1 of this document.

2.13 Additional Instructions

None

2.14 Overhaul Period

The system does not require overhaul at a specific time period. Power on self-test and continuous BIT will monitor the health of the 400W series unit. If the unit indicates an internal failure, the unit may be removed and replaced. See troubleshooting section contained in the 400W Series Installation Manual, listed under reference documentation in paragraph 2.1 of this document.

2.15 ICA Revision and Distribution

To revise this ICA, a letter must be submitted to the ACO along with the revised ICA. The ACO will obtain AEG acceptance, and approve any revision to the Airworthiness Limitations Section 1.4. After FAA acceptance/approval, Garmin will release the revised ICA for customer use, and provide any required notification of the revision.

The latest revision of this document will be available on the Garmin website (www.garmin.com). A Garmin Service Bulletin, describing ICA revision, will be sent to dealers if revision is determined to be significant.

2.16 Assistance

Flight Standards Inspectors or the certificate holder's PMI have the required resources to respond to questions regarding this ICA. In addition, the customer may refer questions regarding this equipment and its installation to the manufacturer, Garmin. Garmin customer assistance may be contacted during normal business hours via telephone 913-397-8200 or email from the Garmin web site at www.garmin.com.

2.17 Implementation and Record Keeping

Modification of an aircraft by this Supplemental Type Certificate obligates the aircraft operator to include the maintenance information provided by this document in the operator's aircraft maintenance manual and/or the operator's aircraft scheduled maintenance program.

| U.S. Department | |
|-------------------------|--|
| of Transportation | |
| Federal Aviation | |
| Administration | |

MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

| orm Approved MB No. 2120-0020 | Electronic Tracking Number |
|----------------------------------|----------------------------|
| 130/2007 | |

For FAA Use Only

| Administra | ation | | | | | | | | <u> </u> | | | | |
|----------------------|---------------------------------------|----------|----------|------------|--|-----------|---------------|-------------------|---------------------------------------|--------|--------------------|---------------------|--|
| instructio | | sition o | f this f | form. | | | | | | | | | ent revision thereof) for alt in a civil penalty for each |
| | Nationality | | - | | rk | | | | Serial No. | | | | |
| 1. Aircra | ft USA | N | 1270 | 2 L | | | | | 414A0608 | | | د.ه ا | ^ |
| | Make CESSN | A | | | | | | Model 414A | | | | Serie | S |
| | | | | | n certificate) | | | | Address (As shown | | | n certificate | 9) |
| 2. Owne | r LONE | DUCK | AVJ | TATT | ON LLC | | | | 1211 E 14T RUSSELLVIL | | | | |
| | į | | | | | | | | 72802 USA | , | ••• | | |
| | | | | | | | 3. F | or FAA l | Jse Only | | | | |
| | | | | | | | | | | | | | |
| 4. | Туре | | • | | | | 5. Un | it Identi | fication | | | | |
| Repair | Alteration | | Unit | | | Make | | | · · · · · · · · · · · · · · · · · · · | Мо | del | | Serial No. |
| | X | AIRF | RAME | E | | | | | (As described | l in l | tem 1 ab | oove) | |
| | | POW | /ERPL | _ANT | | | | | | | | | |
| | | PRO | PELL | ER | | | | | | | | | |
| | | | | | Туре | • | | | | | | , | *· <u> </u> |
| П | | APPL | LIANC | E | | | | | | | | | |
| | | | | | Manufacturer | | | | | | | | |
| | ļ | | | | - 1121 | | 6. Cc | onformit | y Statement | | | | |
| A. Agend | y's Name and | d Addre | ess | | | | B. F | Cind of A | gency | | | | |
| | Avionics, | | | | | | | | | | | | ufacturer |
| | nest Land eville, A | | r Dr | :. | | | 17 | | Certified Mechal Repair Station | | | C. Certif W1NR10 | icate No. |
| 72701 | | | | | | | A | | Maintenance O | | nization | | , LIMITED AIRFRAME |
| have | been made i | n acco | rdance | e with | | ts of Par | t 43 c | | | | | | e or attachments hereto at the information |
| Extended | | | | | ture/Date of Aut | | | dual | | | | | BRADY N TERRY |
| per 14 CF App. B | R Part 43 | | | f | Brad / | , | Er | 1 | | | | | 15-October-2012 |
| прр. о | · · · · · · · · · · · · · · · · · · · | | | | <u> </u> | 7. Appro | | <u> </u> | n to Service | | | | |
| | | | | | | low, the | | identifie | | as in | spected Rejecte | | manner prescribed by the |
| | FAA Flt. Standa | | | | facturer | | ainten | nance Orga | · | | Persons | | d by Canadian Insport |
| BY | FAA Designee | | x | Repai | ir Station | In | specti | ion Author | ization | Oth | er (Specify | () | |
| Certificate | | | | Signat | ture/Date of Aut | horized | Indivi | idual | | 1 | | ··- | BRADY N TERRY |
| Designati W1NR10! | | | | A | Band A | 1 | 2 | سسعوا | | | | | 15-October-2012 |
| | m 337 (10-06) | | | | The state of the s | | $\overline{}$ | 7 | · | | | | |

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| 8. Description of Work Accomplished (If more space is required, attach additional | I sheets. Identify with aircraft nationality | and registration | mark and date work co | ompleted.) |
|---|--|------------------|-----------------------|-------------|
| | | USA | N2702L | Oct-15-2012 |
| | | Nationality an | d Registration Mark | Date |
| N2702L | C414A S/N 414A0608 | | 15-O | CT-2012 |

- 1. INSTALLED A GARMIN GA35 GLOBAL POSITIONING SYSTEM (GPS)/WIDE AREA AUGMENTATION SYSTEM (WAAS) ANTENNA (ANT).
- 2. THE GA35 GPS/WAAS ANT, PART NUMBER (P/N) 013-00235-00, SERIAL NUMBER (S/N) 87645, WAS INSTALLED AT FLIGHT STATION 149 USING GEORGIAN AEROSPACE GROUP LEFT HAND (LH) GA35 GPS ANT DOUBLER INSTALLATION DRAWING NUMBER 70G-316F276, REVISION IR, DATED 10-02-2012; ANT DOUBLER DETAIL DRAWING NUMBER 00G-316D001, REVISION IR, DATED 08-26-2004; WITH FAA FORM 8110-3, DATED OCTOBER 02, 2012.
- 3. THE GA35 GPS/WAAS ANT WAS INTERFACED TO THE GNS430W GLOBAL NAVIGATION SYSTEM GPS INPUT USING A FABRICATED RG400 COAXIAL CABLE ASSEMBLY.
- 4. A LOGBOOK ENTRY UNDER WORK ORDER NUMBER 5563 WAS ENTERED IN THE AIRCRAFT RECORDS. WEIGHT AND BALANCE RECORDS AND EQUIPMENT LIST REVISED.
- 5. POST-INSTALLATION GROUND CHECKS WERE PERFORMED IN ACCORDANCE WITH THE MANUFACTURER INSTALLATION MANUAL AND FOUND TO OPERATE PROPERLY.
- 6. INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ARE ATTACHED AS ADDITIONAL SHEETS.***END***



U.S. Department of Transportation

Federal Aviation Administration

INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ('For Field Approvals-FAA Form 337)

A/C Make: CESSNA

Model: 414A

S/N: 414A0608

Reg. #: N2702L

Revision: ORIGINAL

Date: 15-Oct-12

These sixteen item checklist are Instructions for Continued Airworthiness (ICA), and are applicable to the aircraft listed above when the following equipment is installed:

SYSTEM:

| ITEM | CHECKLIST INFORMATION |
|------|---|
| | any other information on the content, scope, purpose, arrangement, applicability, definitions, abbreviations, precautions, units of measurement, referenced publications, and distribution of the ICA as applicable. Comments: AIRFRAME ALTERATION. |
| 2. | Description: Of the major alteration, its functions, including an explanation of its interface with other systems, if any. Comments: INSTALLED A GARMIN GA35 GLOBAL POSITIONING SYSTEM (GPS)/WIDE AREA AUGMENTATION SYSTEM (WAAS) ANTENNA (ANT). |
| 3. C | Control: Operation information: Or special procedures, if any. Comments: NOT APPLICABLE. |
| 4. S | ervicing information: Such as types of fluids used, servicing points, and location of access panels, as appropriate. Comments: N/A. |
| 5. M | Alintenance Instructions: Such as recommended inspection/maintenance periods in which each of the major alteration components are inspected, cleaned, lubricated, adjusted, tested, including applicable wear tolerances and work recommended at each scheduled maintenance period. This section refers to the manufacturers' instructions for the equipment installed where appropriate (e.g., functional checks, repairs, inspections.) It should also include any special notes, cautions, or warnings, as applicable. Comments: "ON-CONDITION" MAINTENANCE REQUIRED ONLY. CONSULT FAR PART 43, APPENDIX D, SECTION I, FOR RADIO AND ELECTRONIC EQUIPMENT INSPECTIONS DURING ANNUAL AND 100 HOUR INSPECTIONS. |
| 6. T | rouble shooting information: Information describing possible malfunctions, how to recognize those malfunctions, and the remedial actions to be taken. Comments: CONSULT AC 43.13-1B CHANGE 1, SECTION 2, REGARDING GROUND OPERATIONAL CHECKS FOR AVIONICS EQUIPMENT. CONSULT THE MANUFACTURER INSTALLATION MANUAL FOR DETAILED INFORMATION. |

| 7. | Removal and replacement information: This section describes the order and method of removing and replacing products, parts and any necessary precautions. This section should also describe or refer to manufacturer's instructions to make required tests, trim checks, alignment, calibrations, center of gravity changes, lilting or shoring, etc., if any. Comments: THE GA35 GPS/WAAS ANT CAN BE ACCESSED BY REMOVING THE UPPER LEFT HEADLINER ASSEMBLY LOCATED ABOVE THE PILOT SEATING, AND REMOVED WITH ATTACHING HARDWARE. |
|-----|---|
| 8. | Diagrams: Of access plates and information, if needed, to gain access for inspection. Comments: N/A. |
| 9. | Special inspection requirements: Such as X-ray, ultrasonic testing, or magnetic particle inspection, if required. Comments: N/A. |
| 10. | Application of protective treatments: To the affected area after inspection and/or maintenance, if any. Comments: N/A. |
| 11. | Data: Relative to structural fasteners such as type, torque, and installation requirements, if any. Comments: N/A. |
| 12. | List of special tools: Special tools that are required, if any. Comments: N/A. |
| | For commuter category aircraft: The following additional information must be furnished, as applicable: A. Electrical loads B. Methods of balancing flight controls C. Identification of Primary and secondary structures D. Special repair methods applicable to the airplane. Comments: N/A. |
| 14. | Recommended overhaul periods: Are required to be noted on the ICA when an overhaul period has been set by the manufacturer of a component, or equipment. If there is no overhaul period, the ICA should state for item 14: No additional overhaul time limitations. Comments: NO ADDITIONAL OVERHAUL TIME LIMITATIONS. |

- 15. Airworthiness Limitation Section: Include any "approved" airworthiness limitations identified by the manufacturer or FAA Type Certificate Holding Office (e.g., An STC incorporated in a larger field approved major alteration may have an airworthiness limitation.) The FAA inspector should not establish, alter, or cancel airworthiness limitations without coordinating with the appropriate FAA Type Certificate Holding Office. If there are no changes to the airworthiness limitations, the ICA should state for item 15: "No additional airworthiness limitations" or 'Not Applicable."

 Comments: NOT APPLICABLE.
- 16. Revision: This section should include information on how to revise the ICA. For example, a letter will be submitted to the local FSDO with a copy of the revised FAA Form 337 and revised ICA. The FAA inspector accepts the change by signing Block 3 and including the following statement: "The attached revised/new Instructions for Continued Airworthiness (date) for the above aircraft or component major alteration have been accepted by the FAA, superseding the Instructions for Continued Airworthiness (date)." Once the revision has been accepted, a maintenance record entry will be made, identifying the revision, its location, date of the Form 337.

 Comments: N/A.

Note:

Implementation and Record Keeping: For major alterations performed in accordance with FAA Field Approval policy, the owner/ operator operating under part 91 is responsible for ensuring that the ICA is made part of the applicable section 91.409 inspection program for their aircraft. This is accomplished when a maintenance entry is made in the aircraft's maintenance record in accordance with section 43.9. This entry records the major alteration and identifies the original ICA location (e.g., Block 8 of FAA Form 337, dated 5/28/98) along with a statement that the ICA is now part of the aircraft's inspection/maintenance requirements.

For major alterations performed in accordance with a field approval on air carrier aircraft, the air carrier operator is

Responsible for ensuring that the ICA is made part of the applicable inspection/maintenance program for their aircraft. If a procedure is not currently included in the operator's manual to incorporate ICA, this process will need to be appropriately addressed (i.e. the operator submits a revision to its maintenance program to the applicable certificate-holding district office (CHUDO).

For aircraft inspected under an Approved Aircraft Inspection Program (AAIP), the operator will submit a change to the CHDO in accordance with section 135.419 b).

For air carrier aircraft inspected using an annual/IO0 hour inspection program, a reference to the new ICA will be made in the aircraft's maintenance record in accordance with section 43.9. This entry records the major alteration and identifies the original ICA location (e.g., ICA is located/attached to Block 8 of FAA Form 337, dated 5/28/98). In addition, the operator will request a revision to the operator's Operations Specifications, additional maintenance requirements, which incorporates the ICA into the inspection program.

| | U.S. DEPARTMENT OF THE FEDERAL AVIATION AL | | | 1. DATE | | |
|--|--|--|--|---|--|--|
| STATEMENT OF C | | AIRWORTHINESS STANDA | RDS | 02 October 2012 | | |
| | AIRCRAFT OR | AIRCRAFT COMPONENT IDENTIFI | | | | |
| 2. MAKE | 3. MODEL NO. | 4. TYPE (Aircraft, Engine, Propeller, etc., | 5. NAME C | DF APPLICANT | | |
| Cessna Aircraft | 414A | Aircraft | Wings | Avionics, Inc. | | |
| Company | 16 | | CRS# | W1NR1050 | | |
| | | LIST OF DATA | | | | |
| 6. IDENTIFICATION | | · 7. TITLE | | | | |
| DRAWINGS: REV: | | | | | | |
| 70G-316F276 IR | Instl, LH GA35 (| SPS Antenna, FS 149 | | | | |
| (Dated 02 Oct 2012) 00G-316D001 IR (Dated 26 Aug 2004) | Detail, Antenna | Doubler | | | | |
| REPORTS: | | | | | | |
| 70GR316F276 IR (Dated 25 Sep 2012) | Structural Analy | sis of Drawing 70G-316F | 276 | | | |
| END OF DATA | | | | | | |
| | | | | | | |
| | NOTES: | | | | | |
| | | al aspects only of the above gulations listed below in "A | | | | |
| | 2. The approva approval. | I is only for the engineering | design and | d is not installation | | |
| | 3. For Certificat | ion Basis, refer to TC Data | Sheet Nun | nber A7CE. | | |
| | | s-316D001 Rev: IR was pre 8110-3 identified as "SALU- | | | | |
| | | | | , | | |
| | | | | | | |
| | | | | · | | |
| | | | | | | |
| | | | | | | |
| 8. PURPOSE OF DATA | | | | | | |
| 8. PURPOSE OF DATA | ior Alteration liste | d for Cessna Aircraft Cor | mnany Mo | del 414A SN | | |
| 414A0608 (NN: N27 | | a for occorna Amoraic Co. | mpung mo | · | | |
| 9. APPLICABLE REQUIREMENT | S (List specific sections) | | | | | |
| CAR 3.171, .172, .1 | 73, .174, .197, .2 | 92, .293, .294, .295, .296 | , .301. | • | | |
| CERTIFICATION - Under au Part 183, data listed above and o with applicable requirements of the | n attached sheets numbered | he Administrator and in accordance with c <u>None</u> have been examined in accorded. | onditions and limi lance with establi | itations of appointment under 14 CFR ished procedures and found to comply | | |
| _ | ommend approval of thes | | | | | |
| | rove these data | | | | | |
| 11. SIGNATURE(S) OF DESIGNA | TED ENGINEERING REPRE | SENTATIVE(S) 12. DESIGNATION NUM | IBERS(S) 13. | CLASSIFICATION(S) | | |
| | 11n5 | DERT-83056 | | Structures | | |
| Joel R. Simansky FAA Form 8110-3 (3/10) SUPP | 1991 14) In | 2971/1/4 | | | | |
| .,.,,, | , · · | 1 / | | | | |

70GR316F276

INTRODUCTION

The following report outlines the structural aspects only of the installation of the GA35 GPS Antenna located at F.S. 149 on left side of the aircraft centerline on the upper skin. This installation is on the Cessna Model: 414A, SN: 414A0608, as defined on drawing 70G-316F276. Structural substantiation for the installation is per the pertinent sections of CAR 3.

| 3.171 | Loads |
|-------|--|
| 3.172 | Factor of safety |
| 3.173 | Strength & Deformation |
| 3.174 | Proof of structure |
| 3.197 | Pressurized cabin loads |
| 3.292 | Materials and workmanship |
| 3.293 | Fabrication methods |
| 3.294 | Standard fastenings |
| 3.295 | Protection |
| 3.296 | Inspection Provisions |
| 3.301 | Material strength properties and design values |

DISCUSSION

The GA35 GPS Antenna is installed on the aircraft upper skin, fabricated of 0.032" thick 2024-T42 clad aluminum. For the antenna, a 0.75" diameter hole is cut thru the skin and doubler, fabricated from 0.040" thick 2024-T3 clad aluminum. The doubler is installed on the cabin side of the skin with NAS1097AD4 rivets and is detailed on Georgian Aerospace Group, Inc., drawing 00G-316D001.

ALLOWABLES

Original Material

| 2024-T42 Clad Aluminum (0.010" to 0.062" thickness) | Reference 1 Table 3.2.3.0(e ₃) |
|---|--|
|---|--|

$$F_{tu} = 57 \text{ ksi}$$
 $F_{cv} = 34 \text{ ksi}$ $F_{bru}(e/D = 2.0) = 113 \text{ ksi}$

Doubler Material

$$F_{tu} = 59 \text{ ksi}$$
 $F_{cy} = 36 \text{ ksi}$ $F_{bru (e/D = 2.0)} = 121 \text{ ksi}$

Fasteners

$$P_{\text{shear}} = 300 \text{ lbs}$$
 $P_{\text{bearing}} = 0.129" \times 0.032" \times 113 \text{ ksi} = 466 \text{ lbs}$ $P_{\text{NAS}1097AD4} = 300 \text{ lbs}$

ANALYSIS

Due to the low frontal surface area of the antenna, aerodynamic forces are considered to not be critical.

70GR316F276

Analysis Continued

The following equivalent strength analysis is based upon ultimate tensile strength values of the skin material, thus existing airframe design margins of safeties are already accounted (IE, 1.5 factor of safety per CAR 3.172 and 1.33 factor of safety per CAR 3.197(c)).

Material

The loss in strength due to the cutout will be calculated by the use of the material's ultimate tensile strength, skin thickness and cutout diameter (0.75"). The short side (width) of the doubler is 4.0" which is used to check the installation material. A Comparative Margin of Safety will be calculated.

$$P_{lost} = L_{hole} \times t \times F_{tu} = 0.75'' \times 0.032'' \times 57 \, ksi = 1,368 \, lbs$$

$$P_{doubler} = (L_{doubler} - L_{hole}) \times t_{doubler} \times F_{tu} \, _{doubler} = (4.0'' - 0.75'') \times 0.040'' \times 59 \, ksi = 7,670 \, lbs$$

$$M.S. = \frac{P_{doubler}}{P_{lost}} - 1.0 = \frac{7,670 \, lbs}{1,368 \, lbs} - 1.0 = +4.61 \quad \leftarrow Material$$

Fasteners

The doubler is fastened to the skin with a minimum of five (5) each NAS1097AD4 rivets in each of the four (4) sides of the cutout. A Comparative Margin of Safety will be calculated.

M.S. =
$$\frac{P_{fstnr}}{P_{lost}} + \frac{\#_{fstnr}}{P_{lost}} - 1.0 = \frac{300 \, lbs \times 5 \, fasteners}{1,368 \, lbs} - 1.0 = +0.10 \leftarrow Fasteners$$

CONCLUSION


It is concluded that the GA35 GPS Antenna installation shown on drawing 70G-316F276 meets the requirements of CAR 3 as listed in the Introduction.

REFERENCE

- 1) MIL-HDBK-5G, Metallic Materials and Elements for Aerospace Vehicle Structures, 1994.
- 2) Douglas, DC-10 Structural Repair Manual.

- End of Report -

William Bausch September 25, 2012

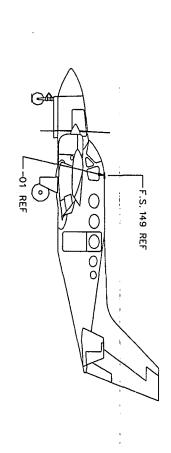

GENERAL

LOCATION

(SCALE: NONE)

THE FOLLOWING ABBREVIATIONS MAYBE USED ON THIS DRAWING: EQUALLY SPACED IS "--" & REFERENCE IS "()".

9

8. ORIENT NUTPLATE AS INDICATED ON DRAWING INSTALL ITEM 09 (NUTPLATE) WITH 2 EACH ITEM 10 (RIVET).

THE FOLLOWING PN ARE ACCEPTABLE SUBSTITUTES FOR ITEM 09 (NUTPLATE): NAS1473A08, NAS1474A08 OR MS21069L08.

FASTENER CODE:

6

OCATE PER ITEM 06 (DOUBLER).

5. BEAD SEAL ANTENNA INSTALLATION WITH PR1422B SEALANT (OR EQUIVALENT).

 USE PR1422B SEALANT (OR EQUIVALENT) BETWEEN FAYING SURFACES OF PRIMARY OR SECONDARY AIRFRAME STRUCTURE AS APPLICABLE.

3. ALODINE PER MIL-DTL-5541 AND APPLY PRIMER PER MIL-PRF-23377 ON ALL APPLICABLE PARTS.

BREAK ALL SHARP EDGES AND REMOVE ALL BURRS.

MATERIAL PROCESS AND METHODS SHALL COMPLY WITH PERTINENT FAA AC NO. 43.13 SPECIFICATIONS OR EQUIVALENT.

-GENERAL NOTES-

THE STEED HERE WE NOT THE STEED THE

ARCRAFT: CESSNA 414A SERIAL NO.: 414A0608

9/25/12

GEORGIAN AEROSPACE

INSTL, LH GA35 GPS ANTENNA, FS 149


"70G-316F276 IR 1 of


GROUP, INC.


ELORGAN AZBOSPACE CROUP, NC. 730 N. BELCHCRAFT AVE. CHESTERFELD, NO 63005 (2013) 319-0858 CA12-003

TOLDRANCES

| INSTL/QTY. | -01 ITEM PART NUMBER | / 01 -01 | 02 | 03 | 1 04 013-00235-00 | 05 | 1 06 00G-316D001-040 | 07 | 4 08 MS35190-257 | 4 09 MS21059L08 | 8 10 MS20426AD3 | AR 11 NAS1097AD4 | |
|-------------------|--------------------------------|-----------------------------|----|----|-------------------------------|----|--|----|------------------|-----------------|-----------------|------------------|--|
| LIST OF MATERIALS | NOMENCLATURE VENDOR / MATERIAL | LH GA35 GPS ANTENNA INSTALL | | | GA35 GPS ANTENNA (REF) GARMIN | | ANTENNA DOUBLER, 0.040" GAG, INC., DRAWING | | SCREW | NUTPLATE | RIVET | RIVET | |

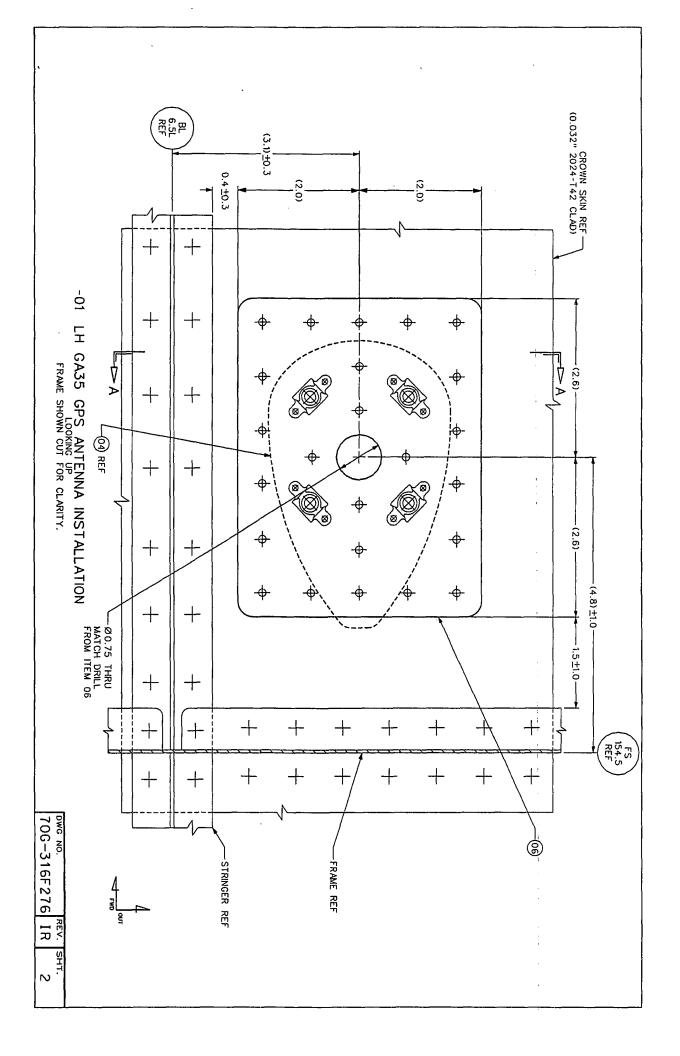

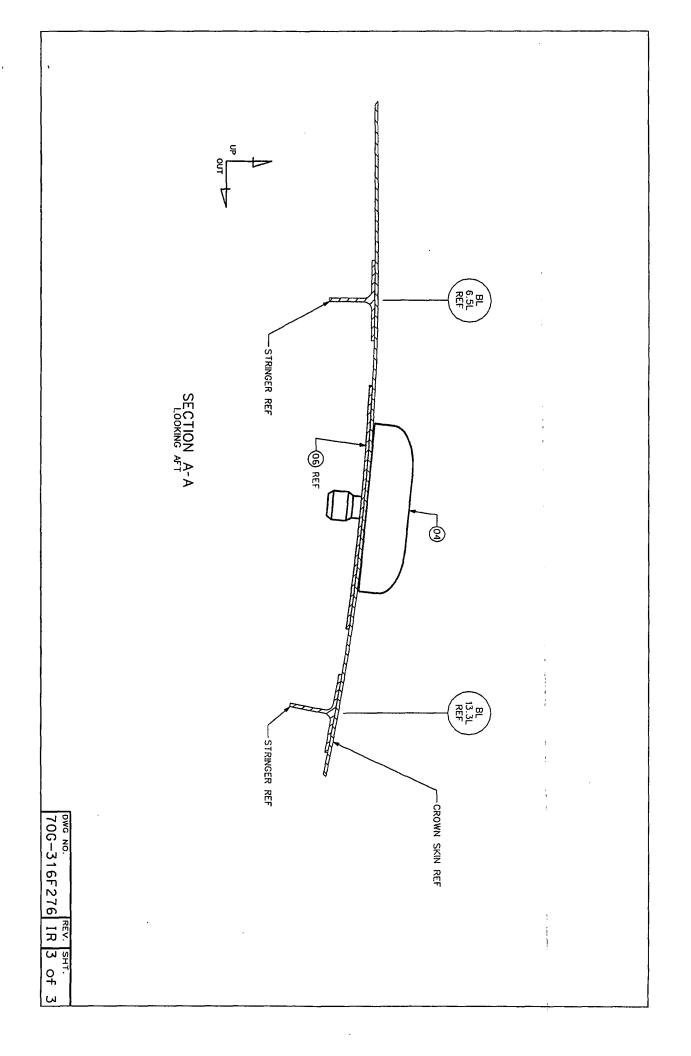

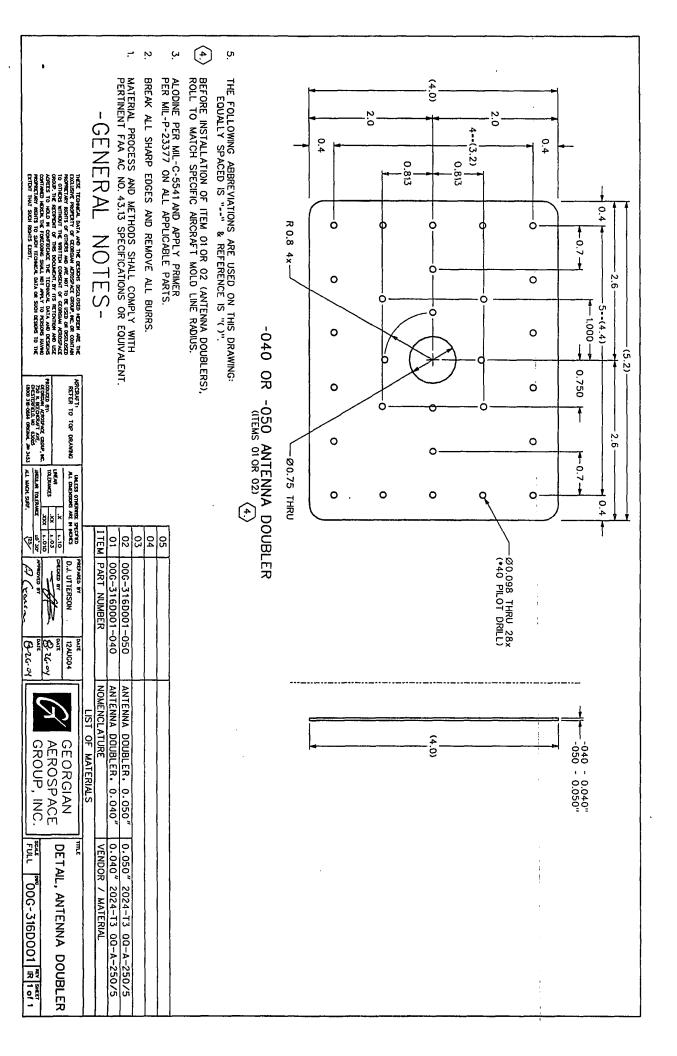

US Department of Transportation Federal Aviation

MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

| Form A | /ppn | oved | |
|--------|------|------|--------|
| OMB | No. | 212 | 0-0020 |

For FAA Use Only

Office Identification

Administration

INSTRUCTIONS: Print or type all entries. See FAR 43.9, FAR 43 Appendix B, and AC 43.9-1 (or subsequent revision thereof) for instructions and disposition of this form. This report is required by law (49 U.S.C. 1421). Failure to report can result in civil penalty not to exceed \$1,000 for each such violation (Section 901 Federal Aviation Act of 1958).

| ÷ | | | | | | Model C ,414 | Ä | | -85 (6.3 - | | | |
|---|---|--|--------------------|--|--|----------------|----------------------|-------------|----------------------------|------------|--|--|
| 1. Aircraft | Serial No. 414A0608 | · · · · · · · · · · · · · · · · · · · | | | Nationality and Registration Mark USA-N2702L | | | | | | | |
| 2. Owner | • | on registration certifica ARGARET A | ite) | | Address (As shown on registration cent RR 1 BOX 154 GOODMAN MO. 64843-9710 | | | | | | | |
| | | | | 3. For | FAA Use O | nly | | | | | | |
| | | Ų. | | | | | | - | | | | |
| | | | | 4. Uni | it Identificati | on | | | 5. Type | | | |
| Unit | | Make | | | Model | | Serial No. | | Repair | Alteration | | |
| AIRFRAME | AIRFRAME (As de | | | | in Item 1 abo | /e) —— | | | | Х | | |
| POWERPLANT | | | | | | | | | | | | |
| PROPELLER | | | | | | | | | | | | |
| APPLIANCE | Type Manufacturer | | | | | | | | | | | |
| | | | 6 | . Conf | formity State | ment | | | | ······ | | |
| A. Agency's Na | me and Address | | | B. Kir | nd of Agency | | | | ficate No. 43114 | | | |
| RON SIDENSTRICKER PO BOX 72 NECK CITY MO. 64849 | | | | X U.S. Certificated Mechanic Foreign Certificated Mechanic Certificated Repair Station | | | 20 | 2043114 . | | | | |
| have bee | n made in accordar | or alteration made to the ce with the requirement correct to the best of n | nts of Pa | identil art 43 o edge. | of the U.S. Fe | deral Ayiation | n Regulations and th | verse or at | ttachments her ormation | reto | | |
| Date 1/18/06 | | | | A | ature of Autho | ast | hual / | | | | | |
| | | | | | for Return | | | · · · | | | | |
| Pursuant to t Administrato | he authority given p r of the Federal Avia | ersons specified below ation Administration an | w, the uni d is | it identi [2 | ified in item 4 APPROVE | was inspect | EJECTED | | by the | | | |
| | A Fit. Standards pector | Manufacturer | Х | Inspe | ection Author | zation | Other (Specify |) | | | | |
| | \ Designee | Repair Station | | .L | on Approved ada Airworthi | | | | | | | |
| Date of Approv | al or Rejection | Certificate or Designation No. A&P 3008859 | IA | Sign | ature of Auth | prized Individ | | 70 | | | | |

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| 8. Description of Work Accomplished (If more space is required, attach additional sheets. Identify with aircraft nationality and registration mark and date work completed.) Installed(4) RAM "slip-joint" assy's. p/n's 1001-3, done IAW STC # |
|--|
| SA4331SW per RAM dwg.#1153 and installation instructions furnished. For continued |
| airworthiness TO BE INSPECTED IAW AD 2000-01-16 mandatory. |
| END |
| |
| - |
| |
| · |
| |
| |
| |
| |
| |
| |
| , |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| $oldsymbol{\cdot}$. |
| |
| |
| |
| |
| Additional Chapter Are Attached |
| Additional Sheets Are Attached |



MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

| Form Approved | |
|-----------------------|-----|
| OMB No. 2120-0020 | |
| For FAA Use C | nly |
| Office Identification | ARM |
| ACE-FSDO-0 | ~ |

INSTRUCTIONS: Print or type all entries. See FAR 43.9, FAR 43 Appendix B, and AC 43.9-1 (or subsequent revision thereof) for instructions and disposition of this form. This report is required by law (49 U.S.C. 1421). Failure to report can result in a civil penalty not to exceed \$1,000 for each such violation (Section 901 Federal Aviation Act of 1958).

| | | Make | ~ . | | | | | Model | 44.45 | | | |
|---|----------------|----------------------|---------------|-----------------------------------|-----------|-------------------------------|--|------------------|---|----------------|---|-------------|
| 1. Aircraf | n | Cessna Serial No. | | | | | . 414A Nationality and Registration M | | | - 1.1l- | • | |
| | 1 | Serial No. | Α. | 14A-0608 | | | | Nationali USA | | п магк 702L | | |
| Name (As shown on registration certificate) | | | | |) | | Address (As shown on registration certificate) | | | | | |
| | | 140110 (23 370) | ,,,, | ni registration coi | | | | • | _ | | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | |
| 2. Owner | r | Bergtol | d I | Margaret 2 | A | | | | oute 1 Box oodman MO | | | |
| | ĺ | 2019001 | <u> </u> | | _ | | | GC | odman MO | 04043 | | |
| | | | | | | 3. F | or FAA Use O | nly | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | 4. U | nit Identificati | on | | | 5. Type | |
| Unit | | | Mak | 7 B | | | Model | | Serial No | , | Repair | Alteration |
| 01111 | | | IVICIO | | | | | | | • . | riepan | Aiteration |
| AIDEDANG | _ | | | , | A - d | نہ ۔ جا ان | lin Hann 4 aba | 1 | | | | |
| AIRFRAME | - | ••• | ··· | | AS DESC | ribea | in nem i abov | (8) | | | | X |
| | | | | | | | | | | | | |
| POWERPL | .ANT | | | | | | | | | | ٠, | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| PROPELLI | ER | | | | | | | | | | | |
| | | Туре | | | | | | | | . | | |
| | | Type | | | | | | İ | | | | i, |
| APPLIANC | CE | Manufacturer | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | 6 | . Co | nformity State | ment | | · , , | · | |
| A. Agend | cy's Na | me and Addre | SS | | | В. 1 | Kind of Agenc | у | | C. Certi | ficate No. | |
| | | | | _ | | U.S. Certificated Mechanic | | | mE 2D | R185L | | |
| | _ | Avionics | - | | | Poreign Certificated Mechanic | | | | 4 | | |
| | | ngs Cour | | | 0 | | | | | Class | 1,2,3 | |
| | | | | <u>66031–001</u> | | <u> </u> | Manufacturer | | | <u> </u> | | |
| D. I ce | rtify th | at the repair an | rdan | ralteration made t | o the un | it(s) i | dentified in ite | m 4 above | and described on t Aviation Regulati | he reverse | orattachme | nts hereto |
| furn | nished | herein is true a | and o | correct to the bes | f of my l | know | ledge. | o. i caciai | Aviation negulati | ons and ti | iat the illioni | iation |
| Date | | | | | | Sig | nature of Auth | orized Ind | ividual | | | |
| | May | 9, 2001 | | | | | Ŋ | 1 1/1 | | | 47550 | |
| | | | | | | Vans 1 | 116- | | | 47550 | | |
| | | | | | | · · | al for Peturn T | | | | | |
| Pursua Admini | int to istrato | the authority g | iven I Avi | persons specification Administrat | ed belov | v, the | e unit identifie ⊠ APPROVE | d in item | 4 was inspected in | n the man | ner prescrib | ed by the |
| | | Flt. Standards | | | - | | | | Other (Specify) | | | |
| | | ector | | Manufacturer | | Insp | ection Authoriz | ation | (-225.1) | | | į |
| BY | EAA | Donience | x | Daneis Ciation | | Pers | on Approved b | v Transpor | | | | |
| | | Designee | 47 | Repair Station | | Can | ada Airworthine | ess Group | | | | |
| Date of A | pprov | al or Rejection | | Certificate or Designation No. | | Sigr | nature of Author | orized Indi | vidual | | | |
| 05- | -09- | 01 | | TF2R185I | | / | // / | | | 234 | 7550 | į |
| l | | | | | | | m / | | | | | i i |

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| 8. Descrip (If more | ption of Work Accomplished e space is required, attach additional sheets. Identify with aircraft nationality and registration mark and date work completed.) |
|------------------------|---|
| | Installed Garmin Model GNS-430 per manufacturer prints and drawings contained in installation manual P/N 190-00140-02 Rev. G dated April 2000. Equipment List and Weight and Balance updated. See Weight and Balance this date for loading. Aircraft placard "GPS NOT APPROVED FOR IFR". |
| ı | Installation complies with AC-43.13 1B and 2A. |
| ٠, | THE END |
| | |
| | |
| | |
| | |
| | |
| | |
| | ☐ Additional Sheets Are Attached |

WHI C DOMESTING THE THE STEEL OF THE



MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

| Form Approved |
|---------------------------|
| OMB No. 2120-0020 |
| For FAA Use Only |
| Office Identification ARM |
| ACE-FSDO -05 |

INSTRUCTIONS: Print or type all entries. See FAR 43.9, FAR 43 Appendix B, and AC 43.9-1 (or subsequent revision thereof) for instructions and disposition of this form. This report is required by law (49 U.S.C. 1421). Failure to report can result in a civil penalty not to exceed \$1,000 for each such yiolation (Section 901 Federal Aviation Act of 1958).

| for each suc | h violation (Sed | ction | 901 Federal Aviation | n Ac | of 1 | 958). | | | | | | |
|----------------------------|--------------------------------|-----------------|--|---------------|----------------------------------|------------------------------------|---------------------------------------|---|--------------------------|-------------------------------|----------------------|--|
| ·*** | Make | | | | | | Model | 414A | | | | |
| 1. Aircraft | Cessna | | | | | | | | | | | |
| | Serial No. | 4 | 14A-0608 | | Nationality and Registrat USA N- | | | | n Mark 2702L | | | |
| | Name (As sho | wn c | on registration certi | licate |) | | stration c | ertilicate) | | | | |
| 2. Owner | Bergto: | lđ | Margaret A | | | | | te 1 Box 1 dman MO 64 | | | · | |
| | <u> </u> | | | | 3 F | or FAA Use Or | | | · | | · | |
| | | | | | | | | | | | | |
| | ·· | | | | 4. l | Jnit Identificati | on | | | 5. Type | | |
| Unit | | Mal | ке | | | Model | | Serial No | | Repair | Alteration | |
| AIRFRAME | | •••• | (As | desc | ribed | d in Item 1 abov | 'e) | ······ | | | Х | |
| POWERPLANT | | | | . | | | | _ | | | | |
| PROPELLER | | | | | | | | | | | | |
| APPLIANCE | Type Manufacturer | | | | | | | | | | I į | |
| | | | | | 3. Co | nformity State: | nent | | | | | |
| A. Agency's N | lame and Addre | ess | | | В. | Kind of Agency | | | C. Certi | ficate No. | | |
| Kings A | vionics, | I | nc. | | | U.S. Certificate | | | F2R185L | | | |
| | gs Court | | | | x | | rtificated Mechanic 1 Repair Station | | | | | |
| New Cen | tury, KS | 6 | 6031-0019 | | | Manufacturer Rac | | | | Radio Class 1,2,3 | | |
| have bee | n made in acco | ordan | ralteration made to ace with the require correct to the best o | ments | of P | art 43 of the U. | m 4 above a S. Federal | and described on t Aviation Regulati | he reverse ons and th | or attachme nat the inform | nts hereto nation | |
| Date | | | | | Sig | nature of Auth | orized Indi | vidual | | | | |
| May | 9, 2001 | | | | | San | MI | m | 23 | 47550 | | |
| | | | | | | al for Return To | | | | | | |
| Pursuant to Administrat | the authority or of the Federa | giver Il Avi | persons specified ation Administration | belo n and | w, th | e unit identifie XXAPPROVE | d in item 4 D □ R | 4 was inspected in EJECTED | n the mar | ner prescrib | ed by the | |
| | A FII. Standards pector | | Manufacturer | | Insp | ection Authoriz | ation | Other (Specify) | | | | |
| 1 1 1 | A Designee | X | Repair Station | | | son Approved by ada Airworthine | | 1 | | | | |
| Date of Appro 05-09- | val or Rejection | | Certificate or Designation No. | | Sig | nature of Autho | rized Indiv | vidual | | | | |
| 05-09- | ·UI | | TF2R185L | | | Jan P | More | | 2. | 347550 | | |

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| | ace is required, atlach additional sheets. Identify with aircraft nationality and registration mark and date work completed.) |
|---|--|
| | Installed BF Goodrich WX-500 Stormscope per manufacturer prints and drawings contained in the installation manual P/N 009-11500-001 Rev. B dated May 16, 2000. |
| | Installation meets or exceeds AC 43.13-2A Chapters 1, 2, and 3, acceptable methods, techniques, and practices. |
| | The installation was done per BF Goodrich installation manual P/N 009-11500-001 (A). |
| • | Weight and Balance and Equipment List updated this date. |
| | Ground checked satisfactory. |
| | Flight test accomplished and systems checked normal. |
| | · · · · · · · · · · · · · · · · · · · |
| | |
| ŗ | • |
| | |
| | · |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | _ |
| | - - |
| | |

☐ Additional Sheets Are Attached

US Department of Transportation Federal Aviation Administration

MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

| Form Approved | Ė |
|---------------|--------|
| OMB No. 2120 | J-0020 |

For FAA Use Only Office Identification

ACE-FIDO-OS

INSTRUCTIONS: Print or type all entries. See FAR 43.9, FAR 43 Appendix B, and AC 43.9-1 (or subsequent revision thereof) for instructions

| for e | ach suc | tion of this for th violation (S | m. 11 Section | his report is require on 901 Federal Avia | d by la ation A | w (49 ct of | U.S.C. 1421), Fa 1958). | ilure to rep | oort can result in | a civil pena | ilty not to exc | eed \$1,000 | |
|-----------|------------------------|-------------------------------------|------------------|--|--------------------|--|--------------------------------|-----------------------------|--|------------------|---------------------------------------|--------------|--|
| | | Make | | | | | | Model | | | · · · · · · · · · · · · · · · · · · · | | |
| 1. Airc | 1. Aircraft Cessna | | | | | | | 414A | | | | | |
| i | | Serial No. 414A-0608 | | | | | | | ty and Registrati | on Mark 2702L | | | |
| | | Name (Acc | how | n on registration ce | | | | USA | | | | | |
| | | I Marine (7/3 3 | iiiowi | ii on registration ce | HIIIGA | (e) | | Adaress (| 'As shown on re | gistration o | ertificate) | | |
| 2. Ow | ner | Bergt | :01 | d Margaret | A | | | | ıte 1 Box | | | | |
| | | | | | | | | Goo | odman MO | 64843 | | | |
| Thursday | e Montific | d harain compli | oe wit | h the anniiceNe | | 3. | For FAA Use O | nly | | | ···· | | |
| ainworth | ness requ | irements and is | approv | ed for the above | | | | | | | | | |
| Detection | o eiroran Euthoriza | , subject to cont of in FAR Pai | omniny rt 43, | h the applicable yed for the above y inspection by a Section 43.7. | | | AIDDI | ANT FUA | | | | | |
| | | | | | | | HINTL | ane plig | HT MANUAL S | UPPLEME | NT | | |
| District | | | | Martens I FAA Inspector | | | 150 | UMPATIB | E WITH THIS | HRCRAFT | | | |
| District | Onice | Date Oigha | 1016 0 | I TAK III SPECIO | | Δ | Unit Identification | | | | 1 | | |
| Uı | | <u> </u> | | -1 | l | | | | | | 5. Type | T | |
| | | | M | ake | ļ | | Model | | Serial N | 0., | Repair | Alteration | |
| AIRFRA | ме | | | | | | | | | | | | |
| AIRFHA | ME | ~ | ~~ |) | As des | cribe | d in Item 1 abov | e) | | • | | x | |
| | | | | · · · · · · · · · · · · · · · · · · · | Γ | | | | | | <u></u> | | |
| POWER | PLANT | | | | | | | | | | ٠, | | |
| | | | _ | | ŀ | | | 1 | | | ' | | |
| | | | | | | | | | | | | | |
| PROPEL | LER. | | | : | | | | | | | | | |
| | | Туре | | | | | | | | | | | |
| | | , ype | | | | | | | | | | i. | |
| APPLIAN | VCE | Manufacturer | | | | - | | | | , | | '' | |
| | | | | | | | | 1 | | | | | |
| | | | | | | 6. Cc | onformity Statem | ent | | | l | | |
| A. Age | ncy's Na | ame and Add | ress | | | В. | Kind of Agency | | | C. Certif | icate No. | | |
| Кi | ກຕຣ | Avionic | | Tna | | U.S. Certificated Mechanic | | | FF274057 | | | | |
| | _ | | • | Box 19 | • | Foreign Certificated Mechanic | | | TF2R185L | | | | |
| | | | | 66031-001 | 9 | X Certificated Repair Station | | | | | | | |
| | | | | | | Manufacturer nit(s) identified in item 4 above and described on the | | | | | Radio Class 1,2,3 | | |
| | | | | | | | | i 4 above ai . Federal A | nd described on I Aviation Regulati | he reverse | or attachmer | nts hereto | |
| Date | misned | nerein is true | and | correct to the best | of my | KHOV | rieage. | | | | | | |
| Date | | | | | | Sig | nature of Author | rized Indivi | idual | | | | |
| | May | 9, 200 | 1 | | | | /b. / | M | | 2 | 347550 | | |
| | | | | | 7. Ap | Drov | al for Return To | Service | | | | | |
| Pursu | ant to t | he authority | give | n persons specified | d belov | v th | | | was inspected in | n the man | or procesil | | |
| Admir | nistrator | of the Feder | al Av | iation Administrati | on and | is | XXAPPROVED | □ RE | JECTED | n me man | ier prescribe | d by the | |
| | | Flt. Standards | | Manufacturer | | Inso | ection Authorizat | ion | Other (Specify) | | | | |
| вү | | ector Manufacturer | | | _ | Inspection Authorization | | | 1 | | | | |
| | FAA | Designee | $ _{\mathbf{x}}$ | Repair Station | | Pers | on Approved by | Transport | İ | | | l | |
| Date of A | Approva | l or Rejection | | Certificate or | Ш | · | ada Airworthines | | | | | | |
| | | • | • | Designation No. | | Sigi | nature of Authori | | , | | | _ | |
| Ub. | -07- | UI | | TF2R185L | - | / | Clan 1 | Man | | 2 | 347550 | ŀ | |

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| Description of Work Accomplished |
|---|
| (If were appear in sequinal, attach additional choots, Identify with aircraft nationality and registration mark and date work completed.) |

Installed a Garmin GNS-430 Nav/Com/GPS. The equipment was installed in accordance with Garmin installation manual P/N 190-00140-02 Rev. B dated October 22, 1998. In addition to the referenced manufacturer installation manual, the installation of this equipment was made in accordance with FAA AC 43.13-2A paragraphs 2, 4, 5, 9, 10, 11, 12, 21, 22, 24, 27, and 36.

The pilot has the ability to select either Nav-1 or GPS for display on the HSI and input to the Autopilot system. Barometric altitude information is supplied to the GNS-430 from the pilot's encoder.

FAA Advisory Circular 20-138 was used as a basis to evaluate and approved this GPS equipment for use as a supplemental navigation system for oceanic and remote, domestic en route, terminal, and non-precision instrument approach {except localizer, localizer directional aid (LDA) and simplified directional facility (SDF)} operations. This installation was evaluated as a "follow-on" approval to the Garmin installation approved in accordance with STC SA00705W3 issued 10/21/98.

The following specific paragraphs in AC 20-138 were complied with to evaluate and obtain IFR Airworthiness Installation approval as provided for in paragraph 8.C2 "Follow-On IFR Airworthiness Installation Approvals": 8c (2) (i) (A), 8c (2) (i) (B), 8c (2) (i) (C), and 8c (2) (i) (D).

A data evaluation was conducted I/A/W AC 20-138 paragraph 8c (2) (iii) which was similar to that outlined in paragraph 8c (1) (ii), specifically as follows: paragraph 8c (1) (ii) (A), 8c (1) (ii) (B), 8c (1) (ii) (C), 8c (1) (ii) (E), 8c (1) (ii) (F), and 8c (1) (ii) (G).

A function flight evaluation was made in accordance with AC 20-138 paragraph 8c (2) (iv) (A), 8c (2) (iv) (B), 8c (2) (iv) (C), 8c (2) (iv) (D), 8c (2) (iv) (E), 8c (2) (iv) (F), 8c (2) (iv) (G), 8c (2) (iv) (H), 8c (2) (iv) (J), and 8c (2) (iv) (K).

"GPS not approved for IFR" placard was removed.

A FAA Approved Airplane Flight Manual Supplement has been added to the FAA Approved Airplane Flight Manual.

An entry documenting this installation and IFR approval status has been made in the aircraft log.

| The instructions for continuous airworthiness items 1 - 16 are not applicable. |
|---|
| The instructions for committoes all words and the transfer of |

DEPARTMENT OF TRANSPORTATION
FEDERAL: AVIATION ADMINISTRATION

FOR FAA USE ONLY

| - 4 | (Airframe, Po | REPAIR AND AL werplant, Propelle | r, or Applian | ice) | 1FT(2) FS(| ICATION NEC | |
|---------------------------------------|--|---|---|--|---|-----------------------------------|--|
| INSTRUCT | IONS: Print or type | all entries. See FAR 4 | 3.9, FAR 43 Appe | ndíx B, and | AC 43.9-1 (or subsequen | t revision thereof) | |
| AIRCRAFT | TIONS: Print or type all entries. See FAR 43.9, FAR 43 Appropriate one and disposition of this form. MAKE Cocons SERIAL NO. | | | MATIONALITY AND REGISTRATION MARK | | | |
| OWNER | NAME (As shown on registration certificate) D.W. Machine Products, Inc. | | | N2702L ADDRESS (As shown on registration certificate) 1111 Sixth Street Highland, Illinois 67249 | | | |
| <u> </u> | | 3. | FOR FAA USE ON | | | | |
| | | e isave gjeliki. | | | | | |
| · · · · · · · · · · · · · · · · · · · | y=5 k | 4. UNIT IDE | NTIFICATION | <u> </u> | # | S. TYPE | |
| UNIT | | Control of the second | MODEL | <u> </u> | SERIAL NO. | REPAIR ATIO | |
| LIRFRAME : | 10/31 2000 | (As des | cribed in Item 1 a | bove) electron | | x | |
| OWERPLANT | GEĞTZEÇAV | | TS10-520-Nc | NB | L-509818 | X | |
| ROPELLÉR | The second was | | भारतको <u>तः है</u> | A1A A2 A3 | MGR 81/ APPM 82 RECEIVED 83 84 | | |
| APPLIANCE | MANUFACTURER | ine ure diesur u ch The c | arionilati Madrida Maria | A4 A5 A6 A7 | NOV 1 8 1994 55 | | |
| | THE PERSONNEL ME | - 227 E - 6. | CONFORMITY STAT | | CS. | CATE NO | |
| - A. | AGENCY'S NAME | AND ADDRESS | B. K | ATED MECHAN | | CERTIFICATE NO. | |
| P. O. 1 | craft Corpora 30x 5219 [exas 76708 | tion | FOREIGN CER | TIFICATED MECI | HANIC | urosik | |
| D. I certif | y that the repair an | d/or alteration made to en made in accordance arnished herein is true s | o the unit(s) ide with the requirement and correct to the | ntified in ite ients of Part best of my | m 4 above and described 43 of the U.S. Federal A knowledge. | on the reverse viation Regulation | |
| Novemb | ar 18, 1994 | Composition of | | AUTHORIZE | D HONOIDUAL | | |
| inter die Afgeblik George | | 7. APPRI | OVAL FOR RETURN | TO SERVICE |) | ones prescribed b | |
| Pursuant t | o the authority give istrator of the Feder | n persons specified below al Aviation Administration | | | was inspected in the ma | The presented t | |
| | AA FLT. STANDARDS | MANUFACTURER | INSPECTION AUTIK | ORIZATION. | | | |
| | AA DESIGNEE X | REPAIR STATION | OF TRANSPORT IN | Charles and the Control | ED INDIVIDUAL | | |
| DE SECTION . | PPROVAL OR er 18, 1994 | CERTIFICATE OR DESIGNATION NO. CRS VA1R551K | SIGNATURE O | | | | |
| | | | | | | /(832 | |

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

8. DESCRIPTION OF WORK ACCOMPLISHED (If more space is required, attach additional sheets. Identify with aircraft nationality and registration mark and date work completed.)

Engine modified for all operation power rating to 325 HP at 41" MAP and 2700 RPM according to RAM Dwg. List 1186, Rev. F, dated 7/11/86. Modified in accordance w/STC SE4327SW Rev. 3. Customer furnished with RAM Overhaul Manual Supplement, Operators Manual Supplement, and Parts Manual Supplement. See specific operating limitations in Aircraft Flight Manual or Supplemental Flight Manual.

Engine cylinders modified per Dwg. 1158, Rev. X dated 12/8/93 I/A/W STC SE3631SW.

Engine crankcase modified per Dwg. 1157, Rev. O dated 2/22/93 I/A/W STC SE3630SW.

Engine installed per RAM Dwg. 1016, Rev. P, dated 9/20/93 I/A/W STC SA4546SW.

Aircraft maximum certificated weight changed to 7105 lbs. Installed propeller model PHC-C3YF-2UF and includes installation of vortex generators (SA8125SW) per RAM Dwg. 1610, Rev. A, dated 11/2/93 I/A/W STC SA8728SW.

Installed Floscan Fuel Flow transducer per Dwg. 1083; Rev. G, dated 11/3/93 in accordance w/STC SE5726SW.

Installed Slick pressurized magnetos p/n 6320 per Dwg. 1036, Rev. T, dated 2/24/94 and Dwg. 1068, Rev. K, dated 3/3/94 I/A/W STC SE4651SW.

Installed spring load induction hose clamps per Dwg. 1171 dated 5/23/85 I/A/W STC SE3632SW.

Exhaust slip joints modified to slip joint configuration per Dwg. 1001; Rev. N, dated 4/20/93 I/A/W STC SA4331SW.

RAM installed propeller cable p/n 1220-25 on left engine I/A/W Cessna 414A Service Manual Instructions and STC SA7594SW.

Installed vacuum pump cooling shroud on engine vacuum pump I/A/W RAM Dwg. 1221, Rev. H, dated 3/21/94 and RAM Dwg. 1199, Rev. F, dated 3/21/94 per STC SA3721SW.

Installed RAM vortex generators and strakes per Dwg. 1507, Rev. E, dated 12/01/92 with Flight Manual Supplement (Option 2) dated 12/6/93 furnished with change in airspeed markings I/A/W STC SA8125SW.

SEE ATTACHED CONTINUATION SHEET

try for server year vit

☑ ADDITIONAL SHEETS ARE ATTACHED

FAA AC 72-4906

o U.S. GPO: 1981 - 775-332/4

3M DATE:

NOTICE

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the

CONTINUATION SHEET FOR N2702L DATED 11/18/94 New empty weight and balance computed. Customer furnished w/FAA approved Overhaul and Parts Manual Supplements for all alterations. Customer furnished w/FAA approved Flight Manual Supplements for all operations. Pertinent details of the above installations are on file under work order no. 1465. -END-Eister u Silok prascurizad magnetos p4a 6320 par Lwg. 1036, Rav. 1, dated 2/24/9€ sori Cing. - a. Rav. R. dated 3/2/83 NA W STC 3E2651814.

ADDITIONAL SHEETS ARE ATTACHED

FAA AC 72-4906

± U.S. GPO: 1981 - 775-332/47

DEPARTMENT OF TRANSPORTATION FEDERAL AVIATION ADMINISTRATION

Form Approved Budget Bureau No. 04-R060.1

| (Airfram | e, Powerplant, Pro | D ALTERATION peller, or Applia | nce) | OFFICE IDENT | IFICATION F | (Bu |
|--|---|--|--|--|---|--|
| TONS: Print o | r type all entries. See I sition of this form. | 'AR 43.9, FAR 43 App | endix B, and | AC 43.9-1 (or subseque | nt revision t | hereof) |
| MAKE | Cessna | | MODEL | 414A | | - |
| SERIAL NO. | 414A-0608 | | NATIONALI | TY AND REGISTRATION | MARK | <u> </u> |
| , | | • | ADDRESS (A | us shown on registration ce | rtificate) | |
| | | <u> الحالي يواد رياد ولأواؤ أسطت</u> | Highla | | <u> </u> | |
| | | angitting with a Salah Salah Salah Majaran Salah | - 122 m 4447 C | | | |
| raine grades | Albanda Baranda Sanara (1944) | tal Almander of Welsta Beach treets of the | | | <u> </u> | 1 |
| | MAKE | MODEL | | SERIAL NO. | | ALTER |
| 354s Ar | | | <u> </u> | | | ATION |
| terren i <u>ngress</u> Best geste lees | (A) | described in Item 1 ab | ave) | ••••••••• | | X |
| A LAC | Maria de la Stado | | | R-521612 | | х |
| | i nome somé erent | netroni ince a 1889 | A1A A2 | APPM | 8: | |
| TYPE | | | - A4 - A5 | SEP 1 5 1994 | | - |
| MANUPACTURER | | | A7 | AO I | | |
| GENCY'S NAM | | | | cs c | PETER AND A | |
| raft Corpo : 5219 | | U.S. CERTIFICATI | ED MECHANIC ICATED MECHAN IPAIR STATION | ing and seems to the seems to t | | |
| | | | | | n the revers | se or tions |
| 17.4 | 그는 소리는 경우 경우 사람은 사람 | SIGNATURE OF A | LEDICRIZED | HOPPOUAL | | |
| . martines | race of a 7. APP | | | e de la gradia e desperada de la composição de la composi | Signal (1965) Signal (1965) | E∮ (d) Ar |
| e authority give tor of the Fede | en persons specified bel eral Aviation Administration | ow, the unit identified | l in item 4 w | inspected in the mann | er prescribed | l by |
| T, STANDARDS | MANUFACTURES | INSPECTION AUTHORIZA | ATION C | THER (Specify) | | |
| ali kan andalian sa | REPAIR STATION | CANADIAN DEPARTMEN OF TRANSPORT INSPEC | CTOR | Control of the contro | a de la companya de la companya de la companya de la companya de la companya de la companya de la companya de La companya de l | Trans |
| OVAL OR | CERTIFICATE OR DESIGNATION NO. VA1R551K | SIGNATURE OF A | I THE PERSON | NAMEDIA | | 1 4/65 |
| | TONS: Print of one and dispose make SERIAL NO. NAME (As sho D. W | TONS: Print or type all entries. See Fons and disposition of this form. MAKE Cessna SERIAL NO. 414A-0608 NAME (As shown on registration certifice D. W. Machine Products 4. UNIT MAKE TCM TYPE MANUFACTURER GENCY'S NAME AND ADDRESS Caft Corporation: 5219 76708 has the repair and/or alteration made is hereto have been made in accordance in information furnished herein is tried by the control of the Federal Aviation Administration of th | TONS: Print or type all entries. See FAR 43.9, FAR 43 Apposition of this form. MAKE Cessna SERIAL NO. 414A-0608 NAME (As shown on registration certificate) D. W. Machine Products, Inc. 3. FOR FAA USE OF AMERICAN ACTION (As described in item 1 cc.) TOSIO-520-NB AAKE MAKE GENCY'S NAME AND ADDRESS GENCY'S NAME AND ADDRESS GENCY'S NAME AND ADDRESS FOR FORMITY STATEM POREON CERTIFICATION (AS CERTIFICATE AS MANUFACTURES IN THE PROPERTY OF THE PROPERTY | TONS: Print or type all entries. See FAR 43.9, FAR 43 Appendix B, and ons and disposition of this form. MAKE Cessna MODEL SERIAL NO. 414A-0608 NATIONALI NAME (As shown on registration certificate) D. W. Machine Products, Inc. 11116 Highla 3. FOR FAA USE ONLY 4. UNIT IDENTIFICATION MAKE MODEL 4. UNIT IDENTIFICATION (As described in item 1 cobove) (As described in item 1 cobove) TYPE MANUPACTURER MANUPACTURER AS AS AS AS AS AS AS AS AS AS AS AS AS A | TONS: Print or type all entries. See EAR 43.9, FAR 43 Appendix B, and AC 43.9-1 (or subseque one and disposition of this form. MAKE Cessma MODE 414A SERIAL NO. 414A-0608 NATIONALITY AND REGISTRATION 12.7021 ADDRESS (As shown on registration certificate) D. W. Machine Products, Inc. 1111 6th Street Highland, IL 62249 3. FOR FAA USE ONLY 4. UNIT IDENTIFICATION MAKE AS USE ONLY TSIO-5204NE R-521612 AS APPENDATE AS SEP 15 1934 | TONS: Print or type all survices of this form. MAKE Cessna MODE 414A SERIAL NO. 414A-0608 NATIONALITY AND REGISTRATION MARK SERIAL NO. 1111 6th Street NIZ70Z1 NAME (As shown on registration cartificate) D. W. Machine Products, Inc. 1111 6th Street Highland, IL 62240 3. FOR FAA USE ONLY 4. UNIT IDENTIFICATION AODR. SERIAL NO. 4. UNIT IDENTIFICATION FIGURE ASSETS ASS |

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

8. DESCRIPTION OF WORK ACCOMPLISHED (If more space is required, attach additional sheets. Identify with aircraft nationality and registration mark and date work completed.)

Engine modified for all operation power rating to 325 HP at 41" MAP and 2700 RPM according to RAM Dwg. List 1186, Rev. F, dated 7/11/86. Modified in accordance with STC SE4327SW, Rev. 4. Customer furnished with RAM Overhaul Manual Supplement, Operators Manual Supplement, and Parts Manual Supplement. See specific operating limitations in Aircraft Flight Manual or Supplemental Flight Manual.

Engine cylinders modified per Dwg. 1158, Rev. X, dated 12/8/93 I/A/W STC SE3631SW.

Installed RAM p/n 1700-1 RAM rocker arm bushing I/A/W RAM Dwg. No. 1700, Rev. A, ECN 993, dated July 29, 1994, per attached DER approval dated 9/12/94.

Engine crankcase modified per Dwg. 1157, Rev. O, dated 2/22/93 I/A/W STC SE3630SW.

Engine installed per RAM Dwg. 1016, Rev. P, dated 9/20/93 I/A/W STC SA4546SW.

Installed Floscan Fuel Flow transducer per Dwg. 1083 Rev. G, dated 11/3/93 VA/W STC SE5726SW.

Installed Slick pressurized magnetos p/n 6320 per Dwg. 1036, Rev. T, dated 2/24/94 and Dwg. 1068, Rev. K, dated 3/3/94 I/A/W STC SE4651SW.

Installed spring load induction hose clamps per Dwg. 1171 dated 5/23/85 VA/W STC SE3632SW.

Negligible weight and balance change.

Customer furnished with FAA approved Overhaul and Parts Manual Supplements for all alterations.

Pertinent details of the above installations are on file under work order no. 1379.

| | TAXES | | printerior de la companya della companya della companya de la companya della comp |
|--|--|------------------|--|
| the state of the s | TO THE RESIDENCE TO THE PROPERTY OF THE PROPER | | |
| TENN HOLA | | W. S. S. S. Char | 1 |
| | CANO. | | |
| | | | |
| | -ADDITIONAL SHEETS | APF ATTACHED | a de la companya de l |
| PAA AC TO Jone | And the control of th | | |

C FAA AC 72-4906

. dr U.S. GPO: 1981 - 775-332/47

2000年

The same

DEPARTMENT OF TRANSPORTATION DATE FEDERAL AVIATION ADMINISTRATION
STATEMENT OF COMPLIANCE WITH THE FEDERAL AVIATION REGULATIONS September 12, 1994 AIRCRAFT OR AIRCRAFT COMPONENT IDENTIFICATION MAKE MODEL NO. TYPE (Airplane, Radio, NAME OF APPLICANT RAM Aircraft Corporation P.O. Box 5219 Helicopter, etc.) Teledyne *See Below Continental Motors Engine Waco, Texas 76708 LIST OF DATA IDENTIFICATION RAM Dwg. No. 1700 Drawing Title: RAM Rocker Arm Bushing: Rev. A ECN 993 The RAM part no. 1700-1 RAM rocker arm bushing is to be installed in lieu of the TCM p/n 652129 rocker arm bushing in the standard TCM TSIO-520 series engine rocker arm assembly. The RAM bushing is manufactured from TCM bushing p/n 652129. The RAM bushing was subjected to appropriate tests and inspections to verify FAR Regulatory Compliance. The RAM bushing provides increased oil flow out of the valve squirt orifice and increased lubricant volume to the rocker shaft to rocker bushing interface when compared to the 652129 TCM bushing installation. These facts were documented by direct comparison testing. Dated: 7/29/94 Twelve RAM 1700-1 bushings were installed in the twelve rocker arm assemblies installed on TSIO-520-NB engine s/n R-521612 as part of the RAM FAR Repair Station engine overhaul process. This engine was also modified in accordance with STC SE3631SW. The engine STC had not been revised at this time to include the above discussed rocker arm bushing revision. Rocker arm shafts and the RAM bushing 1700-1 fits, tolerances, material alloys, and finishes are unchanged from the standard TCM type certificate approved values including the TCM TSIO-520 Overhaul Manual Limits and Specifications: PURPOSE OF DATA Engineering approval of data in support of installation. APPLICABLE REQUIREMENTS (LIST SPECIFIC SECTIONS) CAM 13.101 Materials CAM 13.104 Durability CERTIFICATION-Under authority vested by direction of the Administrator and in accordance with conditions and limitations of appointment under part 183 of the Federal Aviation Regulations, data listed above and on attached sheets numbered have been examined in accordance with established procedures and found to comply with applicable requirements of the Federal Aviation Regulations.

I () therefore () Recommend approval of these data SIGNATURE(S) OF DESIGNATED ENGINEERING REPRESENTATIVE(S) DESIGNATION NUMBER(S) CLASS FICATION(S) SW-394 Powerplant CAR 3, Jack M. Riley, Jr. FAR 23, Chart B All of Areas A & B COMPUTER GENERATED FAA FORM 8110-3 BWRSS

FAA Form 337 (7-67)

| | | | | DEFAITMENT OF TRA | | | | | Budge | Appros | au No. | | | |
|------------|------------------------------|---------------------------------|----------------|---|----------|--|----------------------------------|-------------|----------|---|--|-----------------|-----------------|----------|
| | • | | | OR REPAIR AN Powerplant, Pr | | ALTERATION ler, or Applian | ce) | | | FOR F E IDEN | ITIFICA | HOIT | | نو کُ |
| IN: for | STRUCT | IONS: Print | or ty | pe all entries. See | FAR | 43.9, FAR 43 Appe | ndix B, and | AC 43.9- | 1 (or | ubsequ | ieut re | vision | there | of) |
| | | MAKE | | Cessna | | | MODEL | 414A | | 1,212 19 10 10 10 10 10 10 10 10 10 10 10 10 10 | | .4 | - | |
| 1. AI | RCRAFT | SERIAL NO. | 4 | \$ 14A -0508 | ٠. | | NATIONALI | TY AND | | | MAR | K | | - 1 |
| 2. 0 | WHER | 1 . | | on registration certif as Products, | | | ADDRESS (A 1111 6: Highlan | th Stra | | 49 | rtifica | ate) | | |
| - | | | . , | | - | 3. FOR FAA USE ON | | | 61 | 7.7 | | | | _ |
| | | | | | | | | A1 | 4 | GR | | | B1 | T |
| | | | | | : - | **. | | A1B | AF | PM | | | AFE | \Box |
| | | | | | | | | A2 A3 | \dashv | RECE | IVED | - | 82 | |
| | | | | | Š | | | A4 | - N | OV 2 | n 100 | | 84 | - |
| | | | | | | | · . · · · | A5 | | \$1.0 | J. Mar. | 31. | B5. | \dashv |
| | | | | . ~_ 4. UI | IIT ID | ENTIFICATION | | AS | | PIWE | SDC | يغ | TYPE | J |
| | TIMU | W.E. Tanana | , M | ARE | . 50 G | MODEL | o was to | A7 A8 | HA 8 | T | <u> </u> | | | \$ |
| | | 1. 1 | | र प्रमुख्य अधिकार | 1-17 | The state of the s | 1.23 () 7 | 1 | 1 7.5 | <u> </u> | -+ | | 38 AT | 101 |
| AIRF | RAME | • | •••• | •••••••••• | (Ās de | scribed in item 1 ob | | ******* | ••••• | • | , | -,, | X | |
| POW | ERPLANT | | CM | and balance | han. | TSIO-520-NeNI | I | L-509 | 475 | | | - | K | |
| PROP | ELLER | rgini Kaji tarfija | . , | ्द्रत (एवस्ट्रेस्ट्रे | 1y. | | 100 | i tigat | | | 2 (| | | |
| | 1.1 | TYPE | UX. | h eld safet. | | i i i i i i i i i i i i i i i i i i i | - | | | | | | | |
| APPLI | ANCE | MANUFACTURER | | | _ ′ | THOU THEFORE AL | | 41 1 | 1 m | | | | 1 | |
| | . 1 | | | تعلي المراجع أراوية التي | 6. | CONFORMITY STATEM | ENT | | | | | | | |
| | A. 7 | GENCY'S N | ME | AND ADDRESS | | | D OF AGE | | | <u> </u> | CERTI | FICATE | NO. | |
| RA | H Airc | raft Corp | OFE | tion | | U.S. CERTIFICAT | | | - | | $\widetilde{\mathcal{O}} \to \mathbb{R}$ | 1.4 | | |
| P. | O. Bo | x 5219 | | | • | A CERTIFICATED RE | | | | VA | JR55 | IK . | | |
| Ne | co, Te | zas 7670 | 8 " | | | MANUFACTURER | | | | | 19 5 | • '1 : - | 1 | - 1 |
| | ettachmer | ats hereto hav | re be | en made in accord | ance v | the unit(s) identi with the requirement and correct to the b | ts of Part 4 | 3 of the l | U.S. Fe | escribe deral | d on t lviatio | he rev n Reg | verse ulatio | or or |
| DATE | 1 | 1/15/91 | *** | 63.634346 | · | SIGNATURE OF A | | | | > ~ | | | 1 | |
| · | (دُن (اک فی روان | ស៊ី សាក្រី <u>សាកា សិសិធ</u> | | - 4.6条(67) - 1.453 | | | Oby w |) | | | , | 194 A.J. | · · | |
| | 1 <u>616</u> | out the top- | <u>.</u> | | | VAL FOR RETURN TO | | | | : / | | | | |
| Purs | uant to t | the authority rator of the F | give: | n persons specified I Avistion Adminis | below | , the unit identified and is APPR | OVED D | | | the m | enner j | prescri | ibed b | yy . |
| BY. | | FLT. STANDARDS ECTOR | L | MANUFACTURER | | INSPECTION AUTHORIZ | } | OTHER (Spec | rify) | | | | | *-, |
| | | DESIGNEE | X | REPAIR STATION | <u> </u> | CANADIAN DEPARTME OF TRANSPORT INSPE OF AIRCRAFT | CTOR | | <u> </u> | .; | . <u>, </u> | | | |
| | | ROVAL OR 1/15/91 | | CERTIFICATE OR DESIGNATION NO | э. | SIGNATURE OF A | THORIZED | MOIVID | UAL | | | | | ** |

TO AND WEBSTER STATE

(8320)

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

8. DESCRIPTION OF WORK ACCOMPLISHED (If more space is required, attach additional sheets. Identify with aircraft nationality and registration mark and date work completed.)

Engine modified for all operation power rating to 325 HP at 41" MAP and 2700 RPM according to RAM Dwg. List 1186, Rev. F, dated 7/11/86. Modified I/A/W STC SE4327SW, Rev. 3. Customer furnished w/RAM Overhaul Manual Supplement, Operator's Manual Supplement, and Parts Manual Supplement. See specific operating limitations in Aircraft Flight Manual or Supplemental Flight Manual.

Engine cylinders modified per Dwg. 1158, Rev. Q, dated 9/5/91 I/A/W STC SE3631SW.

Engine crankcase modified per Dwg. 1157, Rev. L, dated 1/26/90 I/A/W STC SE3630SW.

Engine installed per RAM Dwg. 1016, Rev. N, dated 6/18/90 I/A/W STC SA4546SW.

Installed Slick pressurized magnetos p/n 6320 per bwg. 1036, Rev. O, dated 6/28/91 and Dwg. 1068, Rev. I, dated 7/1/91 I/A/W STC SE4651SW.

Exhaust slip joints modified to slip joint configuration per Dwg. 1001, Rev. G, dated 7/16/85 I/A/W STC SA4331SW.

Installed spring load induction hose clamps per Dwg. 1171 dated 5/23/85 I/A/W STC SA3632SW.

Negligible weight and balance change.

Customer furnished w/FAA approved Overhaul and Parts Manual Supplements for all alterations.

Customer furnished w/FAA approved Flight Manual Supplements for all operations.

Pertinent details of the above installations are on file under work order #11931.

200 A TOTAL SHEETS ARE ATTACHED

C. F/AAC75 4906

★ U.S. GPO: 1981 - 775-332/47

DEPARTMENT OF TRANSPORTATION

| | | Powerplant, P | ND ALTERATION ropeller, or Applia | | OFFICE IDENTIF | 510 | BC |
|---------------|--|---|--|--|--|----------------------------------|-----------|
| INSTRUCT | TIONS: Print or ions and disposit | type all entries. Section of this form. | FAR 43.9, FAR 43 App | pendix B, and | AC 43.9-1 (or subsequen | t revision the | reof) |
| 1. ÁIRCRAFT | MAKE Cessi | na | | | L4A | | 1 2 |
| I. NINGKHI I | SERIAL NO. | -0608 | | | ry and registration A 2702L | AARK | |
| 2. OWNER | I | on registration certification certification | | | s shown on registration cert th Street ad. IL 62249 | lificate) | . : |
| | Tons | | 3. FOR FAA USE O | <u> </u> | | | |
| |) i aleģijas | - | क्षा १८० व्यक्त १८५४ है। जिस्सान के स्टब्स्टर | ip. 4 : : : : : : : : : : : : : : : : : : | - 1 1 원. 1 1 원 - 기계 (1 원 기원 기원 기원 1 원 1 원 기원 기원 1 원 기원 기원 기원 기원 기원 기원 기원 기원 기원 기원 기원 기원 기 | | |
| cwedtrê | irora mera | () 15년 회전 1822년 - 1871년 - 1871년 - 1871년 - 1871년 - 1871년 - 1871년 - 1871년 - 1871년 - 1871년 - 1871년 - 1871년 - 1871년 - 1871 | r La de Light et la filo | | | | |
| | 3, | | NIT IDENTIFICATION | | | 5. TYF | PE |
| TINU | 18명 (20년 - 198년 18명 (20년 - 198년 | MAKE | MODEL | | SERIAL NO. | * DEDAIR . | ALTER |
| AIRFRAME | 3 6 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | • | (As described in item 1 al | bove) eeeeee e | # | | x |
| OWERPLANT | <u>TCM</u> . (বিভাগম) ১ | | TS10-520-NB | A1 A1B | MSR R-A19764 | B1 / 3 | X |
| ROPELLER | း နား မြောင်း လိုက္ကန် ရာ | es see to | . Sev. 2 1887 2 20 8374 344 | 7 | NOV 20 1992 | B4 B5 | |
| APPLIANCE | MANUFACTURER | TORRORE SERVICES | | A5 A7. A8. | FTW FSDO AT A & AT | B7 () 3年 | |
| V. * | | | 6. CONFORMITY STATE | | | | |
| RAM A | GENCY'S NAME ircraft Cor Box 5219 Texas 767 | poration | U.S. CERTIFICA FOREIGN CERTI X CERTIFICATED R | ND OF AGEN TED MECHANIC FICATED MECHAN REPAIR STATION | * 1 | TRIFICATE NO |). |
| D. I certify | that the repair a | nd/or alteration ma | de to the unit(s) ident | rified in item nts of Part 43 | 4 above and described o of the U.S. Federal Avia owledge. | n the reverse tion Regulation | oui ou |
| ATE 1 | 1/18/92 | # # # 1 | 1 Kand | al Du | laper | 6 . 15 (4 - 3 . 5) - 10 | |
| Pursuant to t | he authority give | | APPROVAL FOR RETURN TO below, the unit identifie | | as inspected in the manne EJECTED | r prescribed | by |
| FAA 7 | TT_STANDARDS | MANUFACTURER | INSPECTION AUTHOR | ZATION | THER (Specify) | | |
| Y. | DESIGNEE- | REPAIR STATION | CANADIAN DEPARTMI OF TRANSPORT INSPI OF AIRCRAFT | ECTOR | erse confuncia confo | ا جائية أأغوره و | • |
| ATE OF APPR | OVAL OR | CERTIFICATE OR DESIGNATION NO VA1R551K | SIGNATURE OF | | INDIVIDUAL | arte e tiga e sono | 7.7 |

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

8. DESCRIPTION OF WORK ACCOMPLISHED (If more space is required, attach additional sheets. Identify with aircraft nationality and registration mark and date work completed.)

Engine modified for all operation power rating to 325 HP at 41" MAP and 2700 RPM according to RAM Dwg. List 1186, Rev. F, dated 7/11/86. Modified I/A/W STC SE4327SW, Rev. 3. Customer furnished w/RAM Overhaul Manual Supplement, Operators Manual Supplement, and Parts Manual Supplement. See specific operating limitations in Aircraft Flight Manual or Supplemental Flight Manual.

Engine cylinders modified per Dwg. 1158, Rev. Q, dated 9/5/91 I/A/W STC SE3631SW.

Engine crankcases modified per Dwg: 1157, Rev. L dated 1/26/90 I/A/W STC SE3630SW.

Engine installed per RAM Dwg. 1016, Rev, N, dated 6/18/90 I/A/W STC SA4546SW.

Installed Slick pressurized magnetos p/n 6320 per Dwg. 1036, Rev. Q, dated 6/28/91 and Dwg. 1068, Rev. I, dated 7/1/91 I/A/W STC SE4651SW.

Exhaust slip joints modified to slip joint configuration per Dwg. 1001, Rev. G, dated 7/16/85 I/A/W STC SA4331SW.

Installed spring load induction hose clamps per Dwg. 1171 dated 5/23/85 I/A/W STC SA3632SW.

Installed vacuum pump cooling shroud on engine vacuum pump I/A/W RAM Dwg. 1221, Rev. E, dated 2/25/92 and RAM Dwg. 1199, Rev. C, dated 12/12/88 per STC SA3721SW.

Negligible weight and balance change.

Customer furnished w/FAA approved Overhaul and Parts Manual Supplements for all alterations.

Customer furnished w/FAA approved Flight Manual Supplements for all operations.

Pertinent details of the above installations are on file under work order #0361.

CORRUS END DESCRIPTION WAS ACCURATED.

FAA AC 72-4906

± U.S. GPO: 1981 - 775-332/47

| | | | PERMISON OF PEDERAL SAVIATION JOR REPAIR A Powerplant, | ADMIN AND | ALTI | ION ERATION | nce) | | FOR F | IN No. 04-RO | ILY |
|--------|--------------|--|---|--------------------|--|---|--|--------------------------------------|----------------|---------------------------|------------------|
| IN | TRUC | CIONS: Print o | r type all entries. S ition of this form. | ee FAB | | | <u> </u> | d AC 43.9- | -1 (or subsequ | ent revision | thereof) |
| | | MAKE Ces | | | | <u> </u> | MODEL | 14A | | | . 4 |
| 1. Al | KCLAFT | SERIAL NO. | 90608 | | | | : 1 | 127021. | REGISTRATION | | |
| 2. 01 | VNER | 1023234 A4943 | n on registration con hine Products | | | | 1111 6 | As shown of the Stream and, IL | | ertificate) | |
| | | | | | 3. FC | R FAA USE ON | | | L | | |
| | | (5). (1) | | | | | | | *** | | |
| 32.33 | ا و د ا | | | The same | FMTIF | ICATION | | | . | | - |
| U | NIT | | ENAM | | CHIII | MODEL | | | SERIAL NO. | S. REPAIR | ALTER- ATION |
| AIRFR | A section of | Tajūja jas jas jas jas jas jas jas jas jas j | | | scribe | d in item 1 ab | ove) ****** | ****** | ••••• | | X. |
| POWE | RPLANT | TCH | | | TSIC |)520-NE | A1 A1B | | 9,764 | B1 / B1A | x |
| PROPE | LER | | | | | | | L | OV 2 0 1992 | <u>63</u> | - |
| APPLIA | NCE | MANUFACTURER | | | - J _y | , | 28 -XZ | A | FTW FSDO | idá (87.) | |
| | | Table 18 a regar | - <u></u> . A | | 1 ,5 | | <u> </u> | A & | AT] | 198 | . 4. |
| 1. 446 | | | <u> </u> | 6. | CONFO | RMITY STATEM | | | | | |
| 1927 1 | A. A | GENCY'S NAM | E AND ADDRESS | | | U.S. CERTIFICATI | D OF AGE | | | ERTIFICATE I | NO |
| | | ircraft Co | rp oration | | | FOREIGN CERTIFI | | | | | _ |
| | 44 447 | Box 5219 | 708 | | X | CERTIFICATED RE | PAIR STATION | | VA | 51K | - |
| | | hat the repair ts hereto have be information | and/or alteration m been made in accord furnished herein is | ade to dance v | the with t | MANUFACTURER unit(s), identif he requirement rrect to the be | fied in item ts of Parx 4 ss of my k | 4 above 3 of the U | escr J. | on the reversistion Regul | rse or ations |
| DATE | 1. | 1/18/92 | | | SIGI | NATURE OF A | UTHORIZED | MOIVIDU | | | |
| , | | | 7. | APPRO | | | SERVICE | 0 | | | |
| the A | int to th | se suthority giv | en persons specified ral Aviation Admin | below istration | , the | unit identified is 7 X APPRO | | | - · | ner prescribe | d by |
| •Y — | PAA FI | T. STANDARDS | MANUFACTURER | | | CTION AUTHORIZA | LTION | 011#82 (5 : xi | | | |
| | PAA D | ESIGNEE] | REPAIR STATION | | огπ | DIAN DEPARTMEN LANSPORT INSPEC INCRAFT | | | | · | <u> </u> |
| ATE O | | 11/18/92 | CERTIFICATE OR DESIGNATION N | ο. | SIGN | anda | UTHORIZER | TIR Z | 利 ガミ | , | |
| AA Fo | ym 33 | 7 (7-67) | | | | | 1 | | | (8: | 320) |

Weight and balance or operating ! An alteration must be compatible with applicable airworthiness require ans

8. DESCRIPTION OF WORK ACCOMPLISHED craft nationality and registral or ma

Engine modified for all 2700 RPM according of the Modified CA/W TC SE43 SM Manual Supplement, Supplement Supplement Supplement Fig. Supplement Fig. Supplemental F

Engine cylinders modified SE3631SW.

Engine cran cases modified by SE3630SW.

Engine installed per R SA4546SW.

Installed Slick pressu dated 6/28/91 and Dwg.

Exhaust slip joints modi Rev. G, dated 7/16/85 1/A/W S

Installed spring load induction has class per Dwg. 1171 dated 5/23/85 I/A/W STC SA3632SW.

Installed vacuum pump cool
Dwg: 1221, Rev. E. dated Dwa . 12/12/88 per STC SA37215W-

Negligible weight and balar

Customer furnished w/FAA app for all alterations.

order #0361.

Customer furnished w/FAA approx Flight Manual Supplement for all operations.

TENTO COMPLETE STREET, WELLOW, THE STREET, THE

ton the state of the second A STATE OF THE WAY TO STATE OF THE STATE OF

ADDITIONAL SHEETS ARE ATTACHED

-----END------

C FAA AC 72-4596

TICE

s shall be entered in the appropriate aircraft record. strations to assure continued conformity with the

Sired, attach additional sheets. Identify with aircompleted.)

wer rating to 325 HP at 41" MAP and ist 1186, Rev. F, dated 7/11/86. Customer furnished w/RAM Overhaul Supplement, and Parts Manual Climitations in Aircraft Flight

158, Rev. Q, dated 9/5/91 I/A/W STC

1157, Rev. L dated 1/26/90 I/A/W STC

0.6, Rev, N, dated 6/18/90 I/A/W STC

etos p/n 6320 per Dwg. 1036, Rev. Q, dated 7/1/91 I/A/W STC SE4651SW.

p joint configuration per Dwg. 1001,

nyd or ngine vacuum pump I/A/W RAM M Dwg 1199, Rev. C, dated

rhaul and Parts Manual Supplements

Pertinent details of the above installations are on falls inder work

÷ U.S. GPO: 1981 -775-332/47

| - |
|-------------------|
| - Department |
| of Transportation |
| Federal Aviation |
| |

MAJOR REPAIR AND ALTERATION-(Airframe, Powerplant, Propeller, or Appliance)

Form Approved OMB No. 2120-0020 For FAA Use Only Office Identification

03 INSTRUCTIONS: Print or type all entries. See FAR 43.9, FAR 43 Appendix B, and AC 43.9-1 (or subsequent revision thereof) for instructions and disposition of this form. This report is required by law (49 U.S.C. 1421). Failure to report can result in a civil penalty not to exceed \$1,000 for each such violation (Section 901 Federal Aviation Act of 1958). Model 414A Cessna 1. Aircraft Nationality and Registration Mark Serial No. 414A0608 N2702L USA Address (As shown on registration certificate) Name (As shown on registration certificate) 1500 Crafton Ave. 2. Owner Redlands, D.W. Machine Products, Inc. 3. For FAA Use Only 4. Unit Identification Serial No. Repair Alteration Model Make Unit Х 🗻 (As described in Item 1 above) 🗻 AIRFRAME POWERPLANT PROPELLER APPLIANCE Manufacturer 6. Conformity Statement C. Certificate No. B. Kind of Agency A. Agency's Name and Address U.S. Certificated Mechanic Premier Air Center, Inc. Foreign Certificated Mechanic 18 Terminal Drive PAZRO68H Certificated Repair Station East Alton, IL 62024 Manufacturer D. I certify that the repair and/or alteration made to the unit(s) identified in item 4 above and described on the reverse or attachments hereto have been made in accordance with the requirements of Part 43 of the U.S. Federal Aviation Regulations and that the information furnished herein is true and correct to the best of my knowledge. Signature of Authorized Individual Date David Pranger September 3, 1992 Decor Alt. Inspector 7. Approval for Return To Service Pursuant to the authority given persons specified below, the unit identified in item 4 was inspected in the manner prescribed by the Administrator of the Federal Aviation Administration and is APPROVED

REJECTED

Inspection Authorization

Person Approved by Transport Canada Airworthiness Group

Signature of Authorized Individual

Other (Specify)

David Pranger Alt. Inspector

FAA Form 337 (12-88)

FAA Fit. Standards

Inspector

Date of Approval or Rejection

FAA Designee

September 3, 1992

Manufacturer

Repair Station

Certificate or Designation No.

PAZRO68H

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

B. Description of Work Accomplished
(If more space is required, attach additional sheets. Identify with aircraft nationality and registration mark and date work completed.)

Replaced RH outboard flap skin P/N 0825000-60, replaced LH elevator skins P/N 5034000-3, 5034000-4, 5034000-5. Balanced checked after painting and was within limits. Replaced RH elevator upper skin P/N 5034000-25. Balanced checked after painting and was within limits. Repairs performed per Cessna service manual, section 16, structural repair manual and AC43.13-1A.

SERVING TO SERVING THE SERVING

±U \$ 3PO 1990-0-568-012 40004

| | • | | _ | \ IOD === | ID **** | D ALTERATIO | ne. | | OMB No. 2 | | <u> </u> |
|---------------|------------------------------|---|-----------------|--|--|--|----------------------------|--|------------------------------------|-----------------------------------|--|
| , tis n | epartment | | | | | D ALTERATION | | | For | r FAA Use On | nly |
| of Tro | msportation | n (Air) | ren | ne, Powerpli | ant, Pr | opeller, or Ap | mance | J | Office Identi | ification | |
| Admi | erai Aviatio sinistrution | | | e care | | | | | STL- | FS 06 | LEX |
| and | i disposii | TONS: Print or typition of this form. | . This i | report is required | d by law (| AR 43 Appendix B, a (49 U.S.C. 1421). Fe of 1958). | and AC 43. allure to re | 9-1 (or subsequ port can result i | ient revision thin a civil penalt | nereof) for ins ty not to exce | structions ed \$1,000 |
| | | Make | | 14.1 | | | Model | | | | |
| | | CESS | SNA | | <u></u> | | | 414A | | | |
| 1. Ain | craft | Serial No. | 1, 2 | | | 1 1. T. T. T. T. T. T. T. T. T. T. T. T. T. | National | lity and Registra | | - | |
| | | 414A | | | 1 | <u> </u> | 1 | N27021 | | rtifia-* | |
| 2. Ow | vner | | CHIN | on registration ce NE PRODUCTS | S, INC | ស្ត្រា មានជាតិ ។ សុខស្នា ៤០ សុទ្ធិស្តិស្ត | 150 RED | (As shown on r 00 CRAFTON DLANDS, CA | | urcate) | |
| _ | | | | | | 3. For FAA Use O | nly | | | | |
| 4 | • | | | | | | | linin is malate | rightig or | | |
| | | | | ,~ | * ** | | ا من من | | - € - 144 - 47 | F . | |
| | · | | | | | * ****** **** **** | 10- | | | 5 T | <u> </u> |
| | | | | | T | 4. Unit Identificat | uon | | | 5. Type | |
| L | Unit | | Mak | (e | 1 | Model | 5 j | Serial | l No: | Repair | Alteration |
| <u> </u> | | 1 | | | <u>. </u> | | | | | 1 | |
| AIRFR | AME | | · | | (As desc | ribed in Item 1 abo | ove) ++++ | | | | Х |
| POWE | ERPLANT | | - - | | | | | | [off | The Party | 1 |
| PROP | PELLER | , | | | | | • | | SEF | - 2 1997 | - Alleria |
| | | Туре | <u></u> | | + | <u>. 80 (5 S) (5) (5) (5) (7) (7) (7) (7) (7 </u> | | + | t Sti | | |
| | | , the | | | 1 | | | | $\sqrt{}$ | L FSDO | Ψ 🖊 |
| APPLI | IANCE | Manufacturer | • | The state of the s | 1 | 는 문문화문화자 | | | 1 2 | | / |
| | <u> </u> | Manuactorer | : | <u> </u> | 1. | | | 1 | | | <u>/ </u> |
| <u> </u> | · | | _ | | - 6 | S. Conformity State | | | | | _ - |
| | | Name and Addre | | | | B. Kind of Agend | | | C. Certi | ificate No. | <u> </u> |
| P | REMIE | ER AIR CENT | ER, | INC. | · · · | U.S. Certificat | | | | ÷* | |
| 1 | 8 TER | RMINAL DRIV | E | | | Foreign Certif | | | | ко68н | |
| . E | AST A | ALTON, IL | . 6. | 2024 | | X Certificated R | | ···· | - PAZ | LUUUII | |
| | have be | y that the repair ar een made in acco ed herein is true | ordan | nce with the requi | irements | nit(s) identified in its s of Part 43 of the L | tem 4 above | e and described al Aviation Regu | on the reverse ulations and the | e or attachme hat the inforn | ents hereto nation |
| | | is true | -110 | | or my | Signature/of Auti | horized to | laubivit | | SPE ST | |
| Date A | | г 28, 1992 | - | | | Stant. | Hall | man | ALT IN | SPECTOR HOLTMAN | |
| _ | | | _ | | 7. An | pproval for Return | To Service | V 10 12 1 | | | |
| Pui | rsuant t ministra | to the authority o | giver al Avi | persons specifiation Administra | fied belov | w, the unit identifi | fied in item | n 4 was inspect REJECTED | | nner prescrit | bed by the |
| 5 | FA | AA Fit. Standards | 1 | Manufacturer | | Inspection Author | | Other (Spe | ecify) | | |
| BY | | AA Designee | x . | Repair Station | | Person Approved Canada Airworthin | iness Group | ρ | | | |
| | | roval or Rejection | | Certificate or Designation No | ١ | Signature of Auti | norized Inc | dividual | | NSPECTOR HOLTMAN | - |
| . 4 | AUGUS | T 28, 1992 | - 1 | PAZRO68H | and property of the | Ment. | Klak | mar | GEURGE | HOLTMAN | 2-1 |

FAA Form 337 (12-88)

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

8. Description of Work Accomplished (If more space is required, attach additional speets. Identify with aircraft nationality and registration mark and date work completed.) Installed in aircraft the Garmin GPS 100 AVD S/N 92600043 Global Positioning System Receiver, Garmin P/N 011-00042-00 S/N 001070 GPS Antenna and Northern Airborne Technologies RS08-001 S/N 9757 Switching Assembly according to Garmin Installation Manual P/N 190-00004-00 Revision F dated May 4, 1992, Northern Airborne Technologies RS08-001 Installation Instructions and in accordance with AC 43.13-1A Chapter 11 sections 2 & 3 and AC 43.13-2A Chapters 2 & 3. The Garmin GPS 100 AVD Global Positioning System is approved for VFR use only and is placarded accordingly. --FNDsatius renand mile di The second of th P.T. TYSHI TINA MESS JA EN MILL MINISTER SAN AND MINISTER THE TEST THE PERSON OF To bour twent all to be undirected to the រាចជាពណ្ឌៈគឺ លេះសិក សាក មាន ឧណៈ ស៊ូតីម៉ូគ្និ य पर्याप अञ्चल ☐ Additional Sheets Are Attached

± U S.CPO.1990-0-€68-012-40004

| | _ | - | |
|---|---|---|---|
| 4 | • | ~ | _ |
| | | | |

MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

Form Approved: OMB No 2120-0020

For FAA Use Only
Office Identification
STL-FSDO

INSTRUCTIONS: Print or type all entries See FAR 43 9. FAR 43 Appendix B; and AC 43.9-1 (or subsequent revision thereof) for instructions

| - I | Make | | . เม วามหาย เมยะทั่ง | ક્દું જુઓ | | Model | | 1 | | |
|------------------------------|-----------------------------------|---------------------|--|----------------|---------------------------------------|-------------------------------|--|-----------------------|----------------------------------|-------------|
| | CESS | NA. | | y | | r. | 414A | | | |
| Aircraft | Serial 'No. | | | 7 | TWEET LOSS. | Nationality a | and Registration | Mārk | | |
| | 414 | A-0 | 608 | | | | N2702L | 7 | | |
| | Name (As show | n on | registration certifica | te) | 45,241,241,00 | Address (As | shown on regist | ration cer | lulicate) | |
| | | | INE PRODUCTS | | | | RAFTON AVE | | | in the |
| Owner | | 1 | | F | | | DS, CA 9 | | | |
| 3万重新。 | | 7 | | 3 | · · · · · · · · · · · · · · · · · · · | | | : 1. f = ./ | | |
| 146 di | "The alter | ratio | n-identified here | 3. | For FAA Use On | ly . | | | | |
| | airworthine aircraft, st | ibje it 4 500 | requirements and ct to conformity 3, Section 43.7 | i is a insp | pproved for tection by a | he above person au U Bu | described F thorized S C | PPLEN | MANUA MENT 15 BIE WI T. | |
| | DISCIPLE OF | 1100 | Date | 4: | FAA Ins | pector on | | - ; | 5. Type | |
| Unit | J | Maki | e | | Model | | Senal No. | | Repair | Alteratio |
| | | | | | | | | | | |
| RFRAME | · | •••• | | escub | ed in liem 1 abo | /e) | | · deno | | x |
| E | | | · · | ٨, | <u> </u> | | | | | |
| | | | | | 1.00 | 13. gr 🗜 | | | | - |
| OWERPLANT | - | | - 1 | | | | | | | |
| • • • • | | | | 190 | <u> </u> | <u> </u> | <u>ر مي پ^ه محو ادر مسا</u> | | ļ | <u> </u> |
| BOBELLER | | | | 1.44 | សហរដ្ឋបាននៃ គឺ | dollar S | Ordo and | . • | | 1. |
| ROPELLER | | | 1 1 | | | | . ug2 | \$ 6 7 - 5 | | |
| | Type a. | | | | | | | | ļ | |
| | - 750 | | | | | | សគ្គាទ្ធ និស្សវ | | | |
| PPLIANCE | Manufacturer 2 | | | | ITS: pHd (84 | · i (/ - - | ್ 10 ಕಲಗಾಕರ | 44. E | | 1. |
| | | - ' | | Ž., | | | | | | 1. |
| | | | | 6. / | Conformity State | ment | in the state of th | | ↓ | 1 |
| Agency's N | lame and Addre | SS | | | Kind of Agenc | | عرضه المتعاه مرداها | C Carr | ilicale No | |
| | | | THO | | - U.S. Certificat | | | Cen | incate NO | |
| | AIR CENTE | | INC. | | Foreign Certif | | ic . | 1 | | |
| | INAL DRIVE | 34. | 124 | [| X Certificated R | | | PA | ZRO68H | |
| CASI AL | TON, IL | 020 | 124 | | Manufacturer | | | 1 | | |
| · nave det | tu wage tu acco | ırasın | afteration made to the ce with the requirem correct to the best of | ents o | Part 43 of the L | em 4 above a I.S. Federal | nd described on t Aviation Regulation | ne revers | e or attachm hat the infor | ents heret |
| Date | ما ا | | · | | Signature of Aut | norized India | idual - | | | |
| -1. | t | ι. | 1 00 | | · //- | 11 | 10 | GEOR | GE HOLTM | IAN |
| AUGUST | 15, 1991 | | | | Store | //// | leman. | ALT. | INSPECT | OR |
| | | | | | oval for Return | | | | | |
| - Pursuant to Administrat | the authority or of the Federa | given al Avi | persons specified ation Administration | below | the unit identifi | ed in item 4 | was inspected i | n the ma | inner prescr | ibed by th |
| | A Fit. Standards pector | - 1 | Manufacturer | | nspection Author | izátion | Other (Specify) | | | |
| | A Designee | X | Repair Station | f | Person Approved Canada Airworthi | by Transport |] | | = | ٠ |
| | | | | | | | | | | |
| Date of Appro | wat or Rejection | 1 | Certificate or Designation No. | : | Signature of Aut | Dorized Indi | ndual | | | |

NOTICE & property of Justiney of Superial.

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

(If more space is required, attach additional sheets, identify with aircraft nationality and registration mark and date work completed.)

Installed in aircraft the ARNAV R-501 P/N 453-1050 S/N 140770 Loran C Receiver and ARNAV P/N-452-0139 S/N 013845 Pre-Amp Loran C Antenna according to ARNAV Installation Manual P/N 570-1026A dated September 5, 1990 and pertinent data in AC 20-121A.

System flight checked in enroute and terminal modes and was within limits of AC 20-121A paragraph 9.

System approved for IFR enroute and terminal use in accordance with AC 20-121A paragraphs 9a,b,c,e, and 10b have been met and placarded "Enroute and terminal modes approved for IFR" and "approach mode not approved for IFR".

Installed Flight Manual Supplement "ARNAV-R-50i-Loran C Navigation System" dated Aug: 15 1991 is compatible with aircraft.

ENROUTE FLIGHTS

Flight was from St. Louis Regional-Airport-over Vandalia VORTAC, flight over Vandalia VOR on heading of 070° with a distance of zero miles, the error was .25 miles maximum.

Flight over Vandalia VORTAC to over Troy VORTAC. Flight over Troy VORTAC on heading 234° with distance of zero miles, the error was 25 miles maximum. -

Flight over Troy VORTAC to St. Louis Regional Airport

Flight on 4 Cardinal headings over St. Louis Regional Airport has less Flight on 4 Cardinal headings over St. Louis region of than ,5 mile error.

The state of the substitute of the state of

FAA Fit Standards Inspector

FAA Designee

Date of Approval or Rejection

JULY 11, 1991

BY

Manufacturer ६

Repair Station

Certificate or Carsignation No.

| | | | | | | <u></u> | | |
|--|---|--|--|--------------------------|--|------------------------------|---------------|--------------------------|
| US Department of franciscon federal Assortan Administration | MAJOR REPAI (Airframe, Powerplai | R AND A | ALTERATIO | O N pliance | | Office Iden | 7 FAA Use O | nly |
| INSTRUCTI and disposit for each suc | ONS: Print or type all entries See FAR ion of this form. This report is required in violation (Section 901 Federal Aviati | 43 9, FAR 4: by law (49 ton Act of 1 | 3 Appendix B, a J.S.C. 1421). Fa 958). | nd AC 43. ilure to re | 9-1 (or subseque port can result in | | · | structions ed \$1,000 |
| 1. Aircraft | Make CESSNA | , ; | | Model | 414A | · | - · · · | |
| | Serial No. 414A_06//8 | | | l · | N2702L | | | |
| 2. Owner | Name (As shown on registration cer D.W. MACHINE PRODUCTS | | • | 1500 | (As shown on to CRAFTON A ANDS, CA | VE. | outlicate) | Jak 19 |
| | | 3. 6 | or FAA Use O | niy | <u> </u> | | | = 1091 |
| | er e Maria Romania e e e e e e e e e e e e e e e e e e e | | | | * - · · · · · · · · · · · · · · · · · · | | STL | FS_0 |
| | | 4. (| Jnit Identificati | on | | | 5. Type | |
| Unit | Make | | Model | _ | Serial | No. | Repair | Alteratio |
| AIRFRAME | *************************************** | As describe | d in liem 1 abo | ve) | | ~ | | x |
| POWERPLANT | | | | | | | <u> </u> | |
| PROPELLER | | • | | | | | | |
| APPLIANCE | Type Manufacturer | | | | | | | 18. |
| A. Agency's Na | ame and Address | | nformily States | | 7: | | | - |
| PREMIER | AIR CENTER, INC. | | Kind of Agency U.S. Certificate Foreign Certific | d Mechanic | | C Cert | dicate No | |
| EAST ALT | | x | Certificated Re Manufacturer | pair Station | | 1 | .R068н | |
| D. I certify the have been furnished | at the repair and/or alteration made to made in accordance with the require herein is true and correct to the best | the unit(s) ements of P of my know | identified in ite art 43 of the U. riedge. | m 4 above S. Federa | and described o | n the revers ations and t | e or attachme | ints hereto hation |
| Dete , JULY 11, | | | nature of Auth | | ividual | GEORGE | HOLTMAN | 1 |
| | | 7. Approv | al for Return To | o Service | oman | , ALI . 1 | MOFECTOR | - |

Inspection Authorization

Person Approved by Transport Canada Airworthiness Group

Signature of Authorized Individual

Other (Specify)

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

8. Description of Work Accomplished
(If more space is required, attach additional sheets, identify with aircraft nationality and registration mark and date work completed.)

Removed from aircraft the ARNAV R-30 Loran C System consisting of: R-30A P/N 453-0109 S/N 61382 Receiver and Pre-Amp Antenna P/N 452-0112 S/N 32076.

Installed in aircraft the ARNAV R-50i Loran C System consisting of: R50i P/N 453-1050-00 S/N 140770 Receiver and Pre-Amp Antenna P/N 452-0139 S/N 013845 according to ARNAV Installation Manual P/N 570-1026B dated January 21, 1991 and in accordance with AC 43.13-1A Chapter 11 section 2 & 3 and AC 43.13-2A Chapters 2 & 3.

The ARNAV R-50i Loran C System is approved for VFR use only and is pln: rded accordingly.

The control of the co

-END

| $\ell_{\lambda_{\!_{\!N}}}$ |
|-----------------------------|
|-----------------------------|

MAJOR REPAIR AND ALTERATION (Airframe, Powerplant, Propeller, or Appliance)

Form Approved OMB No. 2120-0020

For FAA Use Only Office Identification

INSTRUCTIONS: Print or type all entries. See FAR 43.9. FAP 43 Appendix B, and AC 43.9-1 (or subsequent revision thereof) for instructions and disposition of this form. This report is required by law (49 U.S.C. 1421). Failure to report can result in a civil penalty not to exceed \$1,000 for each such violation (Section 901 Federal Aviation Act of 1958). Model CESSNA 414A 1. Aircraft Serial No. Nationality and Registration Mark N2702L 414A-0608 Name (As shown on registration certificate) Address (As shown on registration certificate) D.W. MACHINE PRODUCTS INC. 1500 CRAFTON AVE. 2. Owner REDLANDS, CA 92373 3. For FAA Use Only 4. Unit Identification 5. Type Unit Make Model Serial No. Repair Alteration AIRFRAME -- (As described in Item 1 above) Х POWERPLANT PROPELLER MAY 1.4 1990 Туре APPLIANCE **FSDO** Manufacturer 6. Conformity Statement Agency's Name and Address B. Kind of Agency C. Cértificate No. U.S. Certificated Mechanic PREMIER AIR CENTER, INC. Foreign Certificated Mechanic 18 TERMINAL DRIVE Certificated Repair Station PAZRO68H EAST ALTON, IL 62024 Manufacturer D. I certify that the repair and/or alteration made to the unit(s) identified in item 4 above and described on the reverse or attachments hereto have been made in accordance with the requirements of Part 43 of the U.S. Federal Aviation Regulations and that the information furnished herain is true and correct to the best of my knowledge. Signature of Authorized Individual MAY 10, 1990 ALT: INSPECTOR 7. Approval for Return To Service Pursuant to the authority given persons specified below, the unit identified in item 4 was inspected in the manner prescribed by the Administrator of the Federal Aviation Administration and is APPROVED PREJECTED FAA Fit. Standards Inspector Other (Specify) Manufacturer Inspection Authorization Person Approved by Transport Canada Airworthiness Group FAA Designee Repair Station Certificate or Designation No. PAZRO68H Date of Approval or Rejection

FAA Form 337 (12-88)

ALT. INSPECTOR

MAY 10, 1990

FAA AIRCRAFT REGISTRY DATE: 1_19_91 CAMERA NO. Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements. 8. Description of Work Accomplished

> Se sontal Para Lander The second of th

opakhati "Vift

Description of Work Accomplished
(If more space is required, attach additional sheets, identity with aircraft nationality and registration mark and date work completed.)

Installed in aircraft the Trans-Cal D120-P2-T S/N 36648 Altitude Digitizer coupled to the existing #2 Transponder ARC RT-859A S/N 1876 according to Prans-Cal Industries Installation manual P/N 7421 November 1977 and in accordance with AC 43.13-1A Chapter 11, Sections 2 & 3 and AC 43.13-2A Chapter 2. Leak check Co-pilot's side Static System per F.A.R. 23.13257 Performed correspondence check per F.A.R. 91.36b.

DEPARTMENT OF TRANSPORTATION FEDERAL AVIATION ADMINISTRATION

Form Approved
Budget-Bureau No. 04-R060.1

OFFICE IDENTIFICATION

FOR FAA USE ONLY

MAJOR REPAIR AND PARESTED (Auframe, Powerplant, Propeller, or Appliance)

INSTRUCTIONS: Print or type all entries. See FAR 43.8 FAR 33 Appendix B, and AC 43.9-1 (or subsequent revision thereof) for instructions and disposition of this form

ig Copperations and an appearance of the con-

FAA - DALLAS 414A Ceasna FSDO-63NATIONALITY AND REGISTRATION MARK i AIRCRAFT SERIAL NO. N2702L 414A-0608 ADDRESS (As shown on registration certificate) NAME (As shown on registration certificate) 18 Terminal Drive 2. OWNER Walston Airbusiness Inc. East Alton, IL 62024 3. FOR FAA USE ONLY

4. UNIT IDENTIFICATION ALTER-ONTE GRO COMODELACION SOL MIT SERIAL NOL STUDE DESTMAKED TO STILL REPAIR 236 and above of (As described in them above) AIRFRAME X are therefield by bur sto li dragger Become plane 1:-509932 POWERPLANT TS10-520-NB ward firs ICM beginsblue X R-514339 enginae'todifiti. no 325 a) ynarion yr/ifilir illi-mo PROPELLER handa edili mendali mendadi. Pileb-a हिम्दान संबद्धां हम् इतिहास है /a-5220 per teq. Me. 13 APPLIANCE MANUFACTURER 213 COM LITTER pamer jelby seems, 40 see

6. CONFORMITY STATEMENT C. CERTIFICATE NO. A. AGENCY'S NAME AND ADDRESS B. KIND OF AGENCY U.S. CERTIFICATED MECHANIC RAM Aircraft Corporation FOREIGN CERTIFICATED MECHANIC Waco, Texas 76708 X CERTIFICATED REPAIR STATION 202-76 MANUFACTURER

D. I certify that the repair and/or-alteration made to the unit(s) identified in item 4 above and described on the reverse or attachments hereto have been made in accordance with the requirements of Part 43 of the U.S. Federal Aviation Regulations and that the information furnished herein is true and correct to the best of my knowledge.

SIGNATURE OF AUTHORIZED INDIVIDUAL 9/3/87

7. APPROVAL FOR RETURN TO SERVICE

Pursuant to the authority given persons specified below, the unit identified in item 4 was inspected in the manner prescribed by the Administrator of the Federal Aviation Administration and is XXAPPROVED REJECTED OTHER (Specify) FAA FLT. STANDARDS INSPECTOR INSPECTION AUTHORIZATION MANUFACTURER CANADIAN DEPARTMENT OF TRANSPORT INSPECTOR FAA DESIGNEE REPAIR STATION SIGNATURE OF AUTHORIZED INDIVIDUAL CERTIFICATE OR

DATE OF APPROVAL OR DESIGNATION NO. ohn Sartor 9/3/87

FAA Form 337 (7-67)

(8320)



Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

 DESCRIPTION OF WORK ACCOMPLISHED (If more space is required, attach additional sheets. Identify with air croft nationality and registration mark and date work completed.)

Engines modified for all operation power rating to 325 HP at 41" MAP and 2700 RPM according to RAM Dwg. List 1186, Rev. F, dated 7/11/86. Modified in accordance with STC SE45275W. Customer furnished w/Overheul Manual Supplement, Operator's Manual Supplement, and RAM Recommended Operational Procedures Supplement. See specific operating limitations in Aircraft Flight Manual or Supplemental Flight Manual.

Engine cylinders modified per Dwg. 1158, Rev. C dated 6/11/86 in accordance with STC SE3631SW.

Engine crankcases modified per Dwg. 1157, Rev. E dated 7/9/86 in accordance with STC SE3630SW.

Installed Floscan Fuel Flow transducers per Dwg. 1083, Rev. A, dated 10/1/84 in accordance with STC SE5726SW.

Installed SDI Hoskins Fuel Flow System per Dwg. 1078, Rev. A, dated 9/24/84 in accordance with STC SA5796SW. Flight Manual Supplement dated 9/20/84.

Installed Slick pressurized magnetos p/n 6220 per Dwg. No. 1036, Nev. G, dated 9/30/83 in accordance with STC SE4651SW.

Hartzell Q-Tip propellers model PHC-C3YF-2UF installed in accordance with STC SA4546SW in conjunction w/TSIO-520-NB engines wodified to 325 HP per STC SE43276W.

Installed Woodward Type II Synchrophase System per Dwg. 213718, Rev. Al3, dated 9/16/30 per STC SA20GL. Woodward governors installed per STC SA300CE in conjunction with Type II Synchrophase System. Operations Manual furnished.

Installed Alcor EGT system per manufacturer's instructions in accordance with STC SA522SW.

Exhaust slip joints modified to slip joint configuration per Dwg. 1001, Rev. G, dated 7/16/85 in accordance with STC SA4331SW.

Installed spring load induction hose clamps per Deg. 1171 dated 5/23/85 in accordance with STC SE3632SW.

-END-

Customer furnished w/FAA approved Flight Manual Supplements for all operations.

्रिकी क्षेत्रक व्यक्तिक विकास

i cripicasiviai vara

THE STATE OF THE

Pertinent details of the above installations are on file under work order \$10175.

ADDITIONAL SHEETS ARE ATTACHED

\$US/-SOVERNMENT PRINTING OFFI € 1977-7:1-021/344

| a de la companya de l | للغايسين للكناس والمؤاخرين والمهور وريح والمراج والأروا والمراور | | | | | |
|--|--|--|--|----------------------------------|-------------------|-------------------|
| | DEPARTMENT OF TR | ANSPORTATION ADMINISTRATION | RECEIVE | Form Approved Budget Bureau l | lo. 04-R06 | 0.1 |
| | MAJOR REPAIR AL | ND ALTERATION | SEP 1 : 1987 | 101011111 | 052 0112 | Υ. |
| | (Airframe, Powerplant, P | | | OFFICE IDENTIF | CATION | |
| | and the second of the second o | | | 49 | | |
| INSTRUCT for instructi | IONS: Print or type all entries. Secons and disposition of this form. | e FAR 43.9, FAR 43 A | #A.A.E. 1346434 FSDO-63 | -1 (or subsequent | revision th | ereof) |
| 1 ALDCOAET | MAKE Cessos | | MODEL 414A | | | - |
| 1. AIRCRAFT | SERIAL NO. 414A-0608 | | NATIONALITY AND N2702L | REGISTRATION M | IÅRK | |
| 2. OWNER | NAME (As shown on registration certi 7W Enterprises Inc. DB 7 Bar Ranch | | ADDRESS (As shown Sand Spring | | ificate) 59077 | ; 1 |
| and the second second section is a second | | 3. FOR FAA USE | ONLY | | | 1. V |
| 14884 G 77 | | 19. 19. 19. 19. 19. 19. 19. 19. 19. 19. | ្រុំ ដែលជំនួលជា | | | |
| property and constitution of a property of a constitution | Terret de Trade de la composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composition della composit | | ing photologic (1964) 55. | | | |
| | Δ II | NIT IDENTIFICATION | | | | |
| - | | | | ranki Turu da sa | 5. T | |
| UNIT | MAKE | MODEL | | SERIAL NO. | REPAIR | ALTER- |
| 91225 A 1924 | TO THE SERVENCE OF RESPECTABLES | THE WASHINGTON | ាលខ្លួលនេះ ស្រែកព្រះប | uridija ir iliya jira | | |
| AIRFRAME | 2 45 5 6 20 1 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 | (As described in item 1 | above) | ******* | | x |
| POWERPLANT | e b. Young granters | TSIO-520-NB | L-50! | | | X. |
| PROPELLER | ा १०% वरावस्य । १०% अस्य १८ ०० इस्युक्तस्य अस्युक्त (१०% १८) | ent in the service of | Çeri Çêk esi ka Çeri T | | | |
| APPLIANCE | TYPE *** ******************************** | रिहित्र क्षेत्रकी के क्षेत्रकी की कि अभवतिक क्षेत्रकी के द्वार्थित कर किंकिया क्षेत्रकी के क्षेत्रकी | লাকী বিশ্ব হৈছিল লাকী চলাকী কিন্তু হৈছিল সভাগৰ বিশ্ব হৈছিল | | | |
| taka a sa a s | I was a second of the second | | | | 1 | |
| | | 6. CONFORMITY STA | TEMENT | | | ٠ |
| Α. / | AGENCY'S NAME AND ADDRESS | В. | KIND OF AGENCY | C. CE | RTIFICATE | NO. |
| | | U.S. CERTIF | CATED MECHANIC | | | |
| | aft Corporation | | ATTITION TO MECTINATIO | | | |
| P. O. Box | 5219 | | D REPAIR STATION | 20 | 2-76 | |
| WAco, Tex | as 76708 | MANUFACTL | RER | | | |
| - attachme | that the repair and/or alteration m nts hereto have been made in according the information furnished herein is | dance with the require | ments of Part 43 of the | : U.S. Federal Avia | n the reve | rse or lations |
| DATE | 9/3/87 | SIGNATURE O | F'AUTHORIZED INDIVI | DUAL | : | |
| | | ARRE METERS EL | John Josta | <u> </u> | | |
| | | APPROVAL FOR RETURN | | | | |
| Pursuant to the Administ | the authority given persons specified trator of the Federal Aviation Admin | below, the unit ident istration and is A | | | er prescrib | ed by |
| | FLT. STANDARDS MANUFACTURER | INSPECTION AUTH | - | secify) | | |
| FAA | DESIGNEE X REPAIR STATION | CANADIAN DEPAR OF TRANSPORT II OF AIRCRAFT | ISPECTOR | - | · · | - |
| DATE OF APP | DESIGNATION N | | F AUTHORIZED INDIV | IDUAL | | |
| FAA Form 3 | 202-76 | | Jon sorwi | | | 3320) |
| THE COMES |) / (/-0/) | | • | | () | JJZU1 . |

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous afterations to assure continued conformity with the applicable airworthiness requirements.

 DESCRIPTION OF WORK ACCOMPLISHED (If more space is required, attach additional sheets: Identify with aircraft nationality and registration mark and date work completed.)

Engines modified for all operation power rating to 325 HP at 41" MAP and 2700 RPM according to RAM Dwg. List 1186, Rev. F, dated 7/11/86. Modified in accordance with STC SE4327SW. Customer furnished w/Overhaul Manual Supplement, Operator's Manual Supplement, and RAM Recommended Operational Procedures Supplement. See specific operating limitations in Aircraft Flight Manual or Supplemental Flight Manual.

Engine cylindera modified per Dwg. 1158, Rev. C dated 6/11/86 in accordance with STC SE36315W.

Engine crankcases modified per Dwg. 1157, Rev. B dated 7/9/86 in accordance with STC SE3630SW.

Installed Floscan Fuel Flow transducers per Dwg. 1983, Rev. A, dated 10/1/84 in accordance with STC SE5726SW.

Installed SDI Hoskins Fuel Flow System per Dwg. 1078, Rev. A, dated 9/24/84 in accordance with STC SA5796SW. Flight Manual Supplement dated 9/20/84.

Installed Slick pressurized magnetos p/n 6220 per Dwg. No. 1036, Rev. G, dated 9/30/83 in accordance with STC SE46518W.

Hartzell Q-Tip propellers model PHC-C3YF-2UF installed in accordance with STC SA4546SW in conjunction w/TSIO-520-NB engines modified to 325 HP per STC SE4327SW.

installed Woodward Type II Synchrophase System per Dwg. 213718, Rev. Al3, dated 9/16/80 per STC SA20GL. Woodward governors installed per STC SA300CE in conjunction with Type II Synchrophase System. Operations Manual furnished.

Installed Alcor EGT system per manufacturer's instructions in accordance with STC SA522SW.

Exhaust slip joints modified to slip joint configuration per Dwg. 1001, Rev. G, dated 7/16/85 in accordance with STC SA4331SW.

Installed spring load induction hose clamps per Dwg. 1171 dated 5/23/85 in accordance with STC SE36325W.

್ಕಾಣಕಡ

Customer furnished w/FAA approved Flight Manual Supplements for all operations.

Pertinent details of the above installations are on file under work order #10175.

END

Seine State of entrane

Seine State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of entrane

Figure State of en

ADDITIONAL SHEETS ARE ATTACHED

देशकान्यक्तिको ह*न्*रेक्षीस्थान

±US. GOVERNMENT PRINTING OFFICE: 1977-771-021/344

| | DEPARTMENT OF TRANSPORTATION | Budges Bureau No. 04-R060.1 | | | | | |
|---------------------------------------|--|--|--|-----------------|-------------|--|--|
| | FEDERAL AVIATION ADMINISTRATIC | NI CONTRACTOR NO. | FOR FAA USE ONLY | | | | |
| | ALTE | RATION | OFFICE IDENTIFICATION | | | | |
| die de | (Airframe, Powerplant, Propeller, | or Appliance) FAR 43 Appendix B, and AC 43.9-1 (or subsequent revision thereo | | | | | |
| | U carries See FAR 43.9. | FAR 43 Appendix B, and AC | 43.9-1 (or subsequent re- | nsion therec | | | |
| TRUCT | IONS: Print or type an entries. | HODE | <u> 190 filosopo</u> Spring Lagrange (1941) | - | | | |
| , as a a, a, | MAKE | | | | | | |
| | Cessna | NATIONALITY | AND REGISTRATION MAI | liK | | | |
| RCRAFT | SERIAL NO. | | N2702L | · | | | |
| 177 | 414A-0608 | ADDRESS (As s | hown on registration certific h Street | ate) | 100 | | |
| | NAME (As shown on registration certificate) | 1111 51x | IL 62249 | 1 | | | |
| WNER | Highland Supply Corp. | | | | | | |
| | 3. F | OR FAA USE ONLY | | • | - | | |
| <u> </u> | - 一直を発展している。 | | | | | | |
| | | | | | | | |
| | | | | ging a sef eget | 13 | | |
| 3.25 | | | 지점 네 보니다. | | · • • • • • | | |
| | | | | T TV | nr. | | |
| | 4. UNIT IDENT | IFICATION | | 5. TY | ALTER- | | |
| | 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | MODEL | SERIAL NO. | REPAIR | ATION | | |
| חואט | MAKE TO THE TOTAL THE TOTA | MODEL TO THE PARTY OF THE PARTY | | 1 | | | |
| | | | | | X | | |
| | (As descr | ibed in item 1 above) | ****** | | | | |
| RFRAME | | | | | | | |
| | | | | 1 | | | |
| OWERPLA | NT CONTRACTOR OF THE CONTRACTO | | of the links | 1 | | | |
| O WENT LOS | | | | 15 | | | |
| | | | /2. 酒 5. 5. | | | | |
| ROPELLER | | - 1 | M V S to S | | | | |
| | | | 日間に | 9 🍍 🕛 | | | |
| - | TYPE CONTRACTOR OF THE CONTRAC | | () S | 7.D | 1 | | |
| APPLIANC | F: | n den englig en en la filologia. La file di esta como como con esta como en la filologia. | The state of the s | <u> </u> | | | |
| AFFLIAGO | - 1 「TT TELL | fagafakki <u>(1900-1906)</u> | 11/2011 | | | | |
| :_ | 6.1 | CONFORMITY STATEMENT | NCY C. C | ERTIFICATE | NO. | | |
| | A. AGENCY'S NAME AND ADDRESS | B. KIND OF AGE | .,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | | | | |
| | A. AGENCI'S TRANSPORT OF St. Louis | U.S. CERTIFICATED MECHANI | ANIC | - ' | | | |
| AirBusi | iness Incorporated of St. Louis | Y CERTIFICATED REPAIR STATIO | N | CRS3735 | | | |
| 18 Terr | minal Drive | | | | | | |
| | on, IL 62024 | MANUTACIONES | 4 -have and described | on the re- | verse (| | |
| E. Alto | | | | | GITACIO1 | | |
| | made M | the unit(s) identified in its | 43 of the U.S. Federal A | MINITION ACE | | | |
| | made M | o the unit(s) identified in ite with the requirements of Part and correct to the best of my | 43 of the U.S. Federal A knowledge. | | | | |
| | ertify that the repair and/or alteration made to chiments hereto have been made in accordance that the information furnished herein is true | the unit(s) identified in ite with the requirements of Part and correct to the best of my SIGNATURE OF AUTHORIZ | ED INDIVIDUAL | | | | |
| | made M | o the unit(s) identified in its with the requirements of Part and correct to the best of my SIGNATURE OF AUTHORIZ | ED INDIVIDUAL | Inspec | | | |
| D. I ce and and DATE | ertify that the repair and/or alteration made to chiments hereto have been made in accordance that the information furnished herein is true a | SIGNATURE OF AUTHORIZE | Commandate | Inspec | tor | | |
| D. I ce and and DATE | ertify that the repair and/or alteration made to chiments hereto have been made in accordance that the information furnished herein is true a | SIGNATURE OF AUTHORIZE | Commandate | Inspec | tor | | |
| D. I ce and and DATE | ertify that the repair and/or alteration made to chiments hereto have been made in accordance that the information furnished herein is true a | SIGNATURE OF AUTHORIZE | Commandate | Inspec | tor | | |
| D. I ce and and DATE | ertify that the repair and/or alteration made to chiments hereto have been made in accordance that the information furnished herein is true a | SIGNATURE OF AUTHORIZED OVAL FOR RETURN TO SERVICE OVA; the unit identified in item on and is APPROVED | Commandate | Inspec | tor | | |
| D. I ce and and DATE | crify that the repair and/or alteration made to chiments hereto have been made in accordance that the information furnished herein is true at the information furnished herein is true at 10-2-86. 7. APPR art to the authority given persons specified beloministrator of the Federal Aviation Administration | SIGNATURE OF AUTHORIZED OVAL FOR RETURN TO SERVICE OVA; the unit identified in item on and is APPROVED | Commandate | Inspec | tor | | |
| D. I ce and and DATE | rtify that the repair and/or alteration made to chiments hereto have been made in accordance that the information furnished herein is true at 10-2-86. 7. APPR and to the authority given persons specified beloministrator of the Federal Aviation Administration of the Federal Aviation of the Federal Aviation of the Federal Aviatio | OVAL FOR RETURN TO SERVICE OVAL FOR RETURN TO SERVICE OWN, the unit identified in item on and is APPROVED INSPECTION AUTHORIZATION | Commandate | Inspec | tor | | |
| D. I ce and and DATE | trify that the repair and/or alteration made to chiments hereto have been made in accordance that the information furnished herein is true at the information furnished herein is true at 10-2-86. 7. APPR 10-2-86 To the authority given persons specified beloministrator of the Federal Aviation Administration of the Federal Aviatio | OVAL FOR RETURN TO SERVICE OVAL FOR RETURN TO SERVICE ON The unit identified in item on and is XI APPROVED INSPECTION AUTHORIZATION CANADIAN DEPARTMENT OF TRANSPORT INSPECTOR | 4 was inspected in the market and th | Inspec | tor | | |
| D. I ce and and DATE | rtify that the repair and/or alteration made to chiments hereto have been made in accordance that the information furnished herein is true at the information furnished herein is true at 10–2–86. 7. APPR ant to the authority given persons specified beloministrator of the Federal Aviation Administration in the Federal Aviation in | OVAL FOR RETURN TO SERVICE OVAL FOR RETURN TO SERVICE ON The unit identified in item on and is XI APPROVED INSPECTION AUTHORIZATION CANADIAN DEPARTMENT OF TRANSPORT INSPECTOR | 4 was inspected in the market and th | Inspec | tor | | |
| D. I ce array and DATE Pursus the Ad | rtify that the repair and/or alteration made to climents hereto have been made in accordance that the information furnished herein is true and the information furnished herein is true and the information furnished herein is true and to the authority given persons specified beloministrator of the Federal Aviation Administration functions in the federal Aviation Administration for the Federal Aviation Administration functions in the federal Aviation Administration for the Federal Aviation Administration functions for the Federal Aviation Administration functions for the Federal Aviation Administration functions for the Federal Aviation Administration functions for the Federal Aviation Administration functions for the Federal Aviation Administration functions for the Federal Aviation Administration functions for the federal Aviation Administration functions for the federal Aviation Administration functions for the federal Aviation Administration functions for the federal Aviation Administration functions for the federal Aviation Administration functions for the federal Aviation Administration functions for the federal Aviation Administration functions for the federal Aviation Administration functions for the federal Aviation Administration functions for the federal Aviation Administration functions for the federal function functions for the federal function function functions for the federal function function functions for the federal function function functions for the federal function functi | OVAL FOR RETURN TO SERVICE OWAL FOR SERVICE OWAL FOR SERVICE OWAL FOR SERVICE OWAL FOR SERVICE OWAL FOR SERVICE OWAL FOR SERVICE OWAL F | Aus inspected in the more control of the more control of the contr | Inspec | tor | | |
| D. I ce | retify that the repair and/or alteration made to climents hereto have been made in accordance that the information furnished herein is true and the information furnished herein is true and to the authority given persons specified beloaministrator of the Federal Aviation Administration in the Federal Aviation Administration in the Federal Aviation Administration in the Federal Aviation Administration in FAA FIT. STANDARDS AND THE FAA DESIGNEE X. REPAIR STATION CERTIFICATE OR DESIGNATION NO. | OVAL FOR RETURN TO SERVICE OVAL FOR RETURN TO SERVICE ON The unit identified in item on and is XI APPROVED INSPECTION AUTHORIZATION CANADIAN DEPARTMENT OF TRANSPORT INSPECTOR | Aus inspected in the more control of the more control of the contr | Inspec | tor | | |

law to

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| Installed ARNAV R-30 Loran, and diagrams. This system is approximately | S/N 60137 in accordance with ARNAV and Cessna wiring proved for VFR use only and is placarded accordingly. |
|--|--|
| | END |
| | |
| | E T- HOLDANIAN CE, PSE-DOLEN PERMONEN |
| | Lating of the control party and a tomic Circ |
| | i and organization for the court built and the court of t |
| | |
| | |
| | |
| | |
| | English to the second of the second as |
| | |
| | |
| | |
| | |
| 24 (1) 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | |
| | |
| | (1985년) 12일 : 1985년 (1985년) 1일 : 1985년 (1985년) 1일 : 1985년 (1985년) 1일 : 1985년 (1985년) 1일 : 1985년 (1985년) 1일 : 1 |
| | gally of the first of the second of the seco |
| | 호프로그램이 아름다면서 보고를 만나 내려가 되는 사람들이 |
| 나를 보면 하고 있다. 그렇게 살아 없는 것이 같다. | 생활기 없이 되었다. 그렇게 그는 것은 것이 없는 것이 없는 것이다. |
| | |
| | The first of the state of the property of the state of th |
| | |
| | opportunities and the contract of the contract |
| | |
| | ningelegis eta 1954 (1954) (1954) (1954) (1954) (1954) (1954) (1954) (1954) (1954) (1954) (1954) (1954) (1954) Pari in la principal de la companya (1954) (1954) (1954) (1954) (1954) (1954) (1954) (1954) (1954) (1954) (19 |
| | |
| 多数 对数 化自己基础 医超级 计特色系统 | |
| | |
| | |
| | ##################################### |
| | 선생님의 경험 전쟁 전쟁 전쟁이 되었다. 그는 것이 없는 것이 없는 것이 되었다. 그는 것이 없는 것이 없는 것이 없는 것이 없는 것이 없는 것이 없는 것이 없는 것이 없는 것이 없는 것이다. 그리고 있다. 선생님의 전쟁 전쟁은 보다는 것이 되었다면 보다는 것이 되었다. 그런 것이 되었다면 되었다면 되었다면 되었다면 되었다면 되었다면 되었다면 되었다면 |
| | |
| | |
| | 하실하다. 19 Here - 1 시간 (19 Here) - 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 |
| | de la la companya de la companya de la companya de la companya de la companya de la companya de la companya de |
| | |
| | 2001年7月1日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日日 |
| 요. 그런 사람들은 보고 보면 하는 것이 되었다. 그런 것이 되었다. 그런 것이 되었다. 그런 그런 것이 되었다. 그런 사람들은 그는 것이 되었다. 그런 것이 없는 것이 없는 것이 되었다. | # 19 15 15 15 15 15 15 15 15 15 15 15 15 15 |
| | <u> </u> |
| a Protesta de la companio de la companio de la companio de la companio de la companio de la companio de la com La companio de la companio de la companio de la companio de la companio de la companio de la companio de la co | |
| | And the state of t |
| 一个一个直接的 and changed by the control of the control | |
| | |
| The State of the S | 실내일 사람들은 살아 이 사람이 아내일이 가는 하나를 불다고 생각하고요? 하다니는 아이트라게 하는 생각 없다. |
| | ADDITIONAL SHEETS ARE ATTACHED |

FAA Form 337 (7-67)

| | | | | | | | | · |
|---------------------------|---|------------|---|------------------------------|--------------|--|--|---|
| | DEPARTMENT OF TRA FEDERAL AVIATION AI | | | | | Form Approved Budget Bureau | No. 04-RO | 60.1 |
| | MAJOR REPAIR AN | - | | 이 없는 사람이 | . | - FOR FAC | USE ON | LY: |
| 1 4 1 1 | | | | 그한 통하는 | | OFFICE IDENTIF | | |
| | (Airframe, Powerplant, Pr | opelier | or Appliar | ice) | | ACF FS | 00 6 | 2 |
| INSTRUCT | TIONS: Print or type all entries. See ions and disposition of this form. | FAR 43.9 | , FAR 43 App | endix B, and A | AC 43.9- | 1 (or subsequen | t revision t | hereof) |
| | MAKE Cessna | | | MODEL | 414A | | | |
| 1. AIRCRAFT | SERIAL NO. | | | NATIONALIT | Y AND F | REGISTRATION A | AARK | - <u>* * </u> |
| | A14A-0608 NAME (As shown on registration certifi | icate I | | ADDRESS (A. | N2702 | | | |
| 2. OWNER | Highland Supply | | | n registration cer Street | certificate) | | | |
| | | | | | and, I | L 62249 | <u> </u> | |
| ļ | | 3. F | DR FAA USE ON | LY | | | | |
| | | | | | | | | |
| | 4. UN | IT IDENTI | FICATION | | | | F . | TYPE |
| UNIT | MAKE | | MODEL | | | | <u></u> | ALTER- |
| | | | MODEL | | | ERIAL NO. | REPAIR | ATION |
| AIRFRAME | *************************************** | As describ | ed in item 1 ab | ovelessesses | | |]. | x |
| | | | | | | | | |
| POWERPLANT | (| | | | | لزو | THE STATE OF THE S | 4. |
| PROPELLER | | | | | | A STATE OF THE STA | 13° 50° | الله لا ل |
| APPLIANCE | MANUFACTURER MANUFACTURER | | | | | E. S. | 64 6 | |
| | | | <u> </u> | | | · · · · · · · · · · · · · · · · · · · | 101118 | · |
| | | 6. CONF | ORMITY STATEM | | | <u> </u> | | |
| | AGENCY'S NAME AND ADDRESS | | | D OF AGEN | CY | C. CE | RTIFICATE | NO. |
| | ess Incorporated of St. L | ours_ | U.S. CERTIFICAT | | | - 2.7 | , | |
| | nal Drive | | FOREIGN CERTIF | | Ю | | | 1 |
| E. Alton, | , IL 62024 | X | CERTIFICATED RE | PAIR STATION | | / CI | IS3735 | |
| <u> </u> | | | MANUFACTURER | | | | | . • |
| | that the repair and/or alteration mac nts hereto have been made in accorda the information furnished herein is to | | | | | and described o | n the reve | rse or lations |
| DATE | | SIC | NATURE OF A | UTHORIZED I | NDIVIDU | AL | · | |
| | 7–14–86 | | house lu | Ul San | | Jonics Ser | vice Fo | oreman |
| | 7. A | PPROVAL | FOR RETURN TO | SERVICE | | | | |
| Pursuant to t | the authority given persons specified brator of the Federal Aviation Administration | | | | s inspect | ed in the mann | er prescrib | ed by |
| - FAA | FLT. STANDARDS MANUFACTURER | 1 . 1 | ECTION AUTHORIZ | 0 | THER (Speci | | | |
| | DESIGNEE X REPAIR STATION | OF | ADIAN DEPARTME TRANSPORT INSPE AIRCRAFT | | | | - · · · · · · · · · · · · · · · · · · · | |
| DATE OF APPE REJECTION | 7-14-86 CRS3735 | SIG | NATURE OF A | UTHORIZED | INDIVIDU | Chance . | vice Fo | reman |

Avionics Service Foreman

(8320)

Weight and balance or operating limitation changes shall be entered in the appropriate aircraft record. An alteration must be compatible with all previous alterations to assure continued conformity with the applicable airworthiness requirements.

| crain nononanny and | COMPLISHED (If more space is required, attach additional sheets. Identify with a registration mark and date work completed.) | |
|--|--|------------|
| Installed 6-8951 | A" Flight Director with previously installed / " ust | ٠. |
| MOTE GOTTE GCCOL | INP TO Lessne Altrerations wing diagram - #0710005 - 1 //ordodor 1 | <u>a</u> . |
| 7-29-81 and 2-22 | -77 and inverter diagram #97(8170 dated 5-31-77. | _ |
| | 리고 : : : : : : : : : : : : : : : : : : : | |
| | | |
| | | Ü |
| | 일본 경험 보다 살아가는 말을 하는데 하다면 살아 있는데 얼마를 하는데 되는데 그는데 그 살아 먹는다. | |
| | | |
| | | |
| | | |
| · · · · · · · · · · · · · · · · · · · | [2] [18] 전 10 (18) 전 15 (| |
| | 등로 다른 경우 등 경우 등 경우 등 이 이 기계 등에 가는 것이 되었다. 경우를 하고 있는 경우를 하는 것이 되었다. 그 기계 기계 기계 기계 기계 기계 기계 기계 기계 기계 기계 기계 기계 | |
| The state of the s | 가는 마시트 마시트 사람들은 마시트 아내는 아내는 아내는 아내는 사람들이 되었다. 그는 그는 그는 그는 그는 그는 그는 그는 그를 보는 것이다. 그렇게 그렇게 그렇게 보고 있는 것이 되었다. 그는 그는 그는 그는 그는 그를 보고 있는 것이다. | 2 - |
| | 경험 방법 방법 방법 원인 전 전 경험 가장 하는 사람들이 되었다. 그는 그는 그는 그는 그는 그는 그는 그는 그는 그는 그는 그는 그는 | - |
| The Spark of the | 됐다면서 가장 나는 나는 사람들이 되었다면 살아 되었다면 살아 있다면 살아 있다. | |
| 보는 내용 하는 경기 때문 | | |
| | [[[[[[[] [[] [[] [[] [[] [[] [[] [[] [[| |
| | | 4- |
| | | |
| | | |
| | | |
| | <u> 맞았다. 그리는 이 마다 하는데 하는데 하는데 하는데 하는데 하는데 하는데 하는데 하는데 하는데</u> | |
| | | |
| | nga pangangangangan pangangan 1907 dan 1907 dan 1908 dan 1909 dan 1909 dan 1909 dan 1909 dan 1909 dan 1909 dan Bangangangan pangangangan pangangan pangangan pangangan pangangan pangangan pangangan pangangan pangangan pang | |
| | 현실하면 수 있는 것이 되었다. 그 전에 함께 함께 보고 있는 것이 되었다. 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 그 | |
| | | |
| | <u> 고급하다 하는 교육을 발생하는 경찰 보는 사람이 있다. 그런 사이트 기계 기계 기계 기계 기계 기계 기계 기계 기계 기계 기계 기계 기계 </u> | |
| | A STATE OF THE PROPERTY OF THE | |
| | mendenning various films of the state of the | |
| | 프램프로 1980년 1980년 1일 1일 1일 1일 1일 1일 1일 1일 1일 1일 1일 1일 1일 | |
| 七年的 医多种 | | - |
| 者是其實有 能活動 | ##################################### | - |
| | | ٠, |
| | 하고 1000 전로 이 전문에 발표한 그리고 이용한 전문에 그리고 있습니다. 그리고 하는 그리고 있는 사람들이 되었습니다. 1985년 - 1985년 - 1987년 - 1987년 - 1987년 - 1987년 - 1987년 - 1987년 - 1987년 - 1987년 - 1987년 - 1987년 - 1987년 - 1987년 | |
| | | |
| | | |
| | : 프랑크 : ATT : : [1] : [| , |
| | | |
| | | |
| | | , |
| | | ۇ. ئ |
| | | 47 |
| | | f |
| | | , , |
| | 선생님 살아들면 얼마를 가는 생활이다. 그 그는 얼마를 하는 사는 사는 사람이 되었다. 그 그 | |
| A | | · · |
| | THANDSTONAL CUCTOR AND THE PARTY OF THE PART | ÷ |
| | ADDITIONAL SHEETS ARE ATTACHED | |

| | · | - | | |
|-----|--------|-------------|-----|------|
| | Bamo | ~ | A | 1 |
| | Data A | ∕® ? | 107 | 104 |
| _ 1 | | ~ しのノヘノ | 121 | IN I |
| `` | | | | |

| ż | | , | - · | |
|----|---|-------|-----|----|
| 1 | * | · {-: | | ; |
| ۷. | - | 7 | | ١. |

Form Approved Budget Bureau No. 04-R0058

| | AP | F PLICA | EDER/ | L AVIATIO | on transportation ON ADMINISTRATION RWORTHINESS CERTIF | CATE | | 2pplica | ble. | it perm | its coi | inpiete 3 | 0 | . 2110 | thorized FAA n attachment. VI or VII as |
|-----------------------|--------------|------------|--------------------------|---|---|----------------------------------|-------------------------------------|---|---|------------------|--|--------------------------------------|---------------------------------------|--|---|
| _ 1 | | STRATIC | _ | | 2. AIRCRAFT BUILDER'S NAM | AE (make) | | 3. AIRCRAFT | MODEL DE | | N 4. | YR. MFG. 980 | FAA CODI | <u>"</u> | 59X7 |
| Š, | | 2702 | | G 15 | Cessna | | | 7. ENGINE | 414A | | | | 49 | <u>, </u> | $\mathcal{L}(\varphi)$ |
| DESCRIPTION | | CRAFT S | | | 6. ENGINE BUILDER'S NAM Continents | a1 | | TS | 10-520 |)-NB | | (15) <u>(1</u> | 1.7 | Ø | 46 |
| ä [| . NU | MBER OF | ENGI | VES. | 9. PROPELLER BUILDER'S NA | AME (muke | <u>ر</u> | 10. PROPEL | | | | | | 1. 24 | - : IMPORT |
| 1 | | Twe | | | McCauley | | : | 3A | F32C 5 | 05/82 | NEA. | بد ب | - | • | |
| 4 | APPL | CATIC | N IS | HEREBY (| MADE FOR (Check applic | able items, |) । चि | INCOME. | UTILITY | TAC | ROBATIO | e In | RANSPORT | GL | IDER BALLOON |
| ٠. | A 1 | L X | | | ORTHINESS CERT. (Indica | | | | 101.0 | 1 1 | | - 1 - 1 | - | | |
| . | В | 1 | | | THINESS CERTIFICATE (Ch | eck appro | ртине | 116-015 / | | | | | | | |
| 1 | | | 2 | LIMITED | | Til | CLASS | | | | - | - 3 | | | |
| | | | 5 | PROVISIO | NAL (Indicate class) | 2 | CLASS | | | | | | | | |
| | | | + | + | | 17 | +=+- | | ST CONTROL 2 | | 2 | AERIAL SURVEYING | | 3 | AERIAL ADVERTISING |
| 1 | | | 3 | RESTRICTE | ED (Indicate operation(s) to | 4 | FORE | T (Wild life | conservation | 7 | 5 | PATROLLI | NG . | 6 | WEATHER CONTR |
| | | | | be conduct | tell) | 0 | OTHE | (Specify) | | | | | ্ | - | <u> </u> |
| | | r | | + | | 111 | RESEA | IRCH AND DE | ELOPMENT | - 1 | 2 | AMATEU | | 3 | EXHIBITION |
| | - | | 4 | | NTAL (Indicate operation(s) | 4 | RACIN | NG | | | 5 | CREW TR | MINING | 6 | MKT. SURVEY |
| | | | | so be come | amred) | 0 | | IOW COMPLIA | | | | | | | |
| I | ا ا امه | + | | 11 | | FLIGHT FOR | | | | | OR STORAG | Æ | | | |
| l | | | operation | FLIGHT PERMIT (Indicate to be complete) | 2 | | CUATE FROM AREA OF IMPENDING DANGER | | | | | | | | |
| . 1 | | - 1 | 8 | Section V | /1 or VII us applicable on | 3 | OPER | ATION IM EXC | ESS OF MA | X. CERTIF | CATED | TAKE-OFF | WEIGHT | | <u></u> |
| Į | | | | reverse sia | | 4 | DELIV | FRING OR EX | PORT , | | 5 | | TION FLIGHT | | |
| ŀ | -1 | 61 | MI II I | IPLE AIRWO | ORTHINESS CERTIFICATE (| check app | roprial | e Restricted | Operation | and St. | andara | or Limit | ted as app | licabl | e above) |
| - | - | CUSTE | PED O | WNER (AL | shown on Certificate of a | Aircraft 1 | Registra | tion) | | | F DEA | LEK, CH | IECK UEK | - | x. 7,704 |
| 2 | B. Al | PERAF | CERT | EICATION E | Aircraft Compan BASIS (Check applicable b R TYPE CERTIFICATION DATA S | locks and | l comple | te items as | Wich | ita, | Kan | sas, | 67277 | | aplied with and give |
| OWNER'S CERTIFICATION | X | and Rev | ision N | | 7CE Rev. 19 | | | X lutest | AD Ne.) | Iss | ue: | 80-21 | -12 ber of each : | | |
| | | | | | n/a | | | <u> </u> | | Ŋ | /A | · <u> </u> | | | |
| Š | C. A | IRCRAF | T OPE | RATION AN | ID MAINTENANCE RECORD | 5 | | \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ | - 1 1- | vorel u.c. | TAL 0 | NIV Fue | er luurs fan | on tim | e last certificate issu |
| | | CHECK I | F RECC | RDS IN | TOTAL AIRFRAME HOURS- | -)ENCICXÓ2 | C)010342 | 00000 | | r reneut | | N/A | er //www.r.j.so | | |
| \$ | ועו | EAD 01 | 173 | | 5.2 | | | | | | | | | | |
| = | D. C Fed | eral A | CATIO viation that | Administ the aircraft | eby certify that I am the tration in accordance with t has been inspected and | owner (h Section is airwo | or his 301 o orthy a | agent) of the feder and eligible | ne aircraft al Aviatio for the ai | rworthi | ness c | ove; that B, and ap ertificate | the aircra plicable F requested | edera | l Aviation Regu |
| | DATE | E OF AP | PLICAT | ON | NAME AND TITLE (Print | or type) | | - ' | | SIGN | MYKE | ا طب | | | |
| | 1 7 | 0 - 2 | 8-8 | 0 : | M. Gann, Qu | uality | y Co | atrol M | anage | - 1 | 11/E | <u>cu</u> | ~ | 4.0 | 102 (4)! |
| _ | A. 1 | HE AIR | CRAF | DESCRIBE | D ABOVE HAS BEEN INSP | ECTED A | ND FO | UND AIRWO | ORTHY BY | : (Comp | lete 1b | is section | only if t | AK . | TION (Give Certific |
| IFICATION | | .FA | R PART | 121 OR 127 | CERTIFICATE HOLDER (Gire | 3 | CER | NFICATED ME ificute No.) | HANK (G | ire | 6 | Nu.) | | - an | |
| AGENCY VERIFICA | 5 | , Ai | RCRAFT | MANUFACTU | URER (Gice Nume of Firm) | | ۔ د مو | • ********** | , 4 <u></u> | | · · . | | <u> </u> | | |
| ₹5 | DAT | E E | | | TITLE | | /ir | | | SIG | IATURE | 5 14 | | - | |
| ٠. | | | - 1 | | | | Q_i° | · · | · | 40 | <u>. </u> | | · | _ | |
| TATIVE | | Check | ALL ed, o | applicable | blocks) I find that the mendment or modification ted by: FAA Inspec | aircroth | escrib urrent ficate | ed in Sectional airworthine holder, wade | on lor VI | cate. I R 65, | FA | R 121 o | r 12/, or | - ل | e certification permit under AR 145. |
| 23 | | ATE | | DISTRICT | T OFFICE DESIG | MEE S SIC | NATHE | AND MP D | iv | | F | A INSPECT | TOR'S SIGN | ATURE | · 2 |
| 4 | i - | | | 1 07 | mmo 4 F | | Opelon | Landard. | PR.3 | | 1.11 | | | 9 | . , |
| REPRES |] | LO-2 | 8-8 | SU1 | EMDO 1 5 6 6 6 6 6 6 6 6 6 | m | | I. Rowden | | | | | | 3 2. | |

| A. 84 | MANUFACTURER | |
|----------------------|--|--|
| NAM | | ADDRESS |
| | | |
| o D£ | PRODUCTION BASIS (Check applicable item) | |
| b. P | PRODUCTION CERTIFICATE (Give production certificate number | J angson selection in the least of the leas |
| H | TYPE CERTIFICATE ONLY | the state of the s |
| - | APPROVED PRODUCTION INSPECTION SYSTEM | 하인 공연을 모르는 이 회회 원통 화인력 중화 역도 그 그는 원모 |
| باب | GIVE QUANTITY OF CERTIFICATES REQUIRED FOR OPERATING NEEDS | 5: |
| | TE OF APPLICATION NAME AND TITLE (Print or 1)pe) | SIGNATURE |
| DAIL | ie Or, Articollor | the state of the s |
| | | por companion which is the companion of |
| | DESCRIPTION OF AIRCRAFT REGISTERED OWNER | ADDRESS |
| | REGISTERED OWNER | the second of th |
| | | MODEL |
| | BUILDER (Muller) | 8 M. 1982 - 198 - 11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 |
| 1] | The second section of the section of the section of the second section of the section of t | REGISTRATION MARK |
| | SERIAL NUMBER | |
| | | Section 1. The section of the sectio |
| B. C | DESCRIPTION OF FLIGHT | |
| 1 | FROM | |
| | | DEPARTURE DATE DURATION |
| | VIA La La La La La La La La La La La La La | |
| | | |
| C | CREW REQUIRED TO OPERATE THE AIRCRAFT AND ITS EQUIPMENT | and the second s |
| | PILOT CO-PILOT NAVIGATOR OTHER (Specify) THE AIRCRAFT DOES NOT MEET THE APPLICABLE AIRWORTHINESS R | |
| | | |
| | | |
| | | |
| | ONLINESS NICESSARY K | OR SAFE OPERATION (Use attuchment if necessary) |
| E. | THE FOLLOWING RESTRICTIONS ARE CONSIDERED NECESSARY FO | OR SAFE OPERATION (Use attachment if necessary) |
| E. | THE FOLLOWING RESTRICTIONS ARE CONSIDERED NECESSARY FO | OR SAFE OPERATION (Use attachment if necessary) |
| E. | | OR SAFE OPERATION (Use attachment if necessary) |
| E. | | OR SAFE OPERATION (Use attachment if necessary) |
| E. | | OR SAFE OPERATION (Use attachment if necessary) |
| E. | | OR SAFE OPERATION (Use attachment if nection)) |
| E. | | OR SAFE OPERATION (Use attachment if necessary) |
| E | | OR SAFE OPERATION (Use attachment if necessary) |
| E | | OR SAFE OPERATION (Use attachment if necessary) |
| | | |
| | | |
| F | CERTIFICATION—I hereby certify that I am the registered own | er (or his agent) of the aircraft described above; that the aircraft is region of the Federal Aviation Act of 1938, and applicable Federal Av |
| F | CERTIFICATION—I hereby certify that I am the registered own | er (or his agent) of the aircraft described above; that the aircraft is region of the Federal Aviation Act of 1938, and applicable Federal Av |
| F. wi | CERTIFICATION—I hereby certify that I am the registered own with the Federal Aviation Administration in accordance with Sect Regulations; and that the aircraft has been inspected and is airway. | er (or his agent) of the aircraft described above; that the aircraft is region of the Federal Aviation Act of 1938, and applicable Federal Av |
| F. wi | CERTIFICATION—I hereby certify that I am the registered own | er (or his agent) of the aircraft described above; that the aircraft is region 501 of the Federal Aviartion-Act of 1958, and applicable Federal Aviorthy for the flight described. SIGNATURE |
| F. Will | CERTIFICATION—I hereby certify that I am the registered own with the Federal Aviation Administration in accordance with Sect Regulations; and that the aircraft has been inspected and is airway DATE NAME AND TITLE (Print or 1790) | er (or his agent) of the aircraft described above; that the aircraft is region 501 of the Federal Aviartion-Act of 1958, and applicable Federal Aviorthy for the flight described. SIGNATURE |
| F. Will | CERTIFICATION—I hereby certify that I am the registered ownwith the Federal Aviation Administration in accordance with Sect Regulations; and that the aircraft has been inspected and is airwed DATE NAME AND TITLE (Print or 1700) A. Operating Limitations and Markings in Compliance with FAR | er (or his agent) of the aircraft described above; that the aircraft is reging 101 of the Federal Aviation Act of 1958, and applicable Federal Aviorthy for the flight described. SIGNATURE G. Statement of Conformity, FAA Form 317 (Attach when require |
| F. Will | CERTIFICATION—I hereby certify that I am the registered ownwith the Federal Aviation Administration in accordance with Sect Regulations; and that the aircraft has been inspected and is airwith the Amount of the A | er (or his agent) of the aircraft described above; that the aircraft is regining 501 of the Federal Aviation. Act of 1958, and applicable Federal Aviority for the flight described. SIGNATURE G. Statement of Conformity, FAA Form 317 (Attach when require |
| F. Will | CERTIFICATION—I hereby certify that I am the registered own with the Federal Aviation Administration in accordance with Sect Regulations; and that the aircraft has been inspected and is airway. NAME AND TITLE (Print or 1994) A. Operating Limitations and Markings in Compliance with FAR 91.31 as Applicable B. Current Operating Limitations Attached | er (or his agent) of the aircraft described above; that the aircraft is regition 501 of the Féderal Aviation. Act of 1958, and applicable Federal Avorthy for the flight described. SIGNATURE |
| F. Will | CERTIFICATION—I hereby certify that I am the registered own with the Federal Aviation Administration in accordance with Sect Regulations; and that the aircraft has been inspected and is airway to the control of the c | er (or his agent) of the aircraft described above; that the aircraft is regition 501 of the Federal Aviation-Act of 1958, and applicable Federal Avorthy for the flight described. SIGNATURE |
| F. W.R. O. (Ajuo sin | CERTIFICATION—I hereby certify that I am the registered own with the Federal Aviation Administration in accordance with Sect Regulations; and that the aircraft has been inspected and is airway. NAME AND TITLE (Print or 1994) A. Operating Limitations and Markings in Compliance with FAR 91.31 as Applicable B. Current Operating Limitations Attached | er (or his agent) of the aircraft described above; that the aircraft is registion 501 of the Federal Aviation Act of 1958, and applicable Federal Aviation for the flight described. SIGNATURE |

| NATIONALITY AND 2. | | - AUDCDA | FT SERIAL 4. CATEGOR | , |
|--|------------------------------|--------------------------------|---|-------------------------|
| REGISTRATION MARKS | MANUFACTURE MODEL | A V NUMBE | | ٠ |
| N2702L | Cessma CRAL | A 414A 7414A | .0608 Norma | L |
| AUTHORITY AND BASIS FO | R ISSUANCE | Toderat Aviation Oof | 958 and certifies that a | s of the |
| date of issuance, the o | ircraft to which issued has | been inspected and found | to conform to the type of | ertificate |
| comprehensive and deta | zilefi/airworthiness/code/as | of hor been shown to meet | Convention on Internation | nal Civi |
| Aviation, except as not Exceptions: | | 1 | | 1 - 1 - |
| Exceptions: None | * * | THE TANK | • | |
| , | 11. | | | |
| TERMS AND CONDITIONS | Mos mal | Hereurive Bagineer | // | |
| Unless sooner surrender | cate is affective as long as | her minesion date is offerwith | e established by the Admir maintenance, and altera | nistrator, tions are |
| | with Acres 234 (3, and 21 | of he Vederal Avidsion leg | ulations, as appropriate, | and the |
| this airworthiness certifi performed in accordance aircraft is registered in | the United Andreas Ad | | | |
| performed in accordance aircraft is registered in TE OF ISSUANCE | FALRE POST AND TOTAL | 0/3 R A | DESIGNATION NUM | BER . |